


REGENCY PLUS, INC.

SERIES 6613 IMPACT VINYL FIXED WINDOW INSTALLATION ANCHORAGE DETAILS

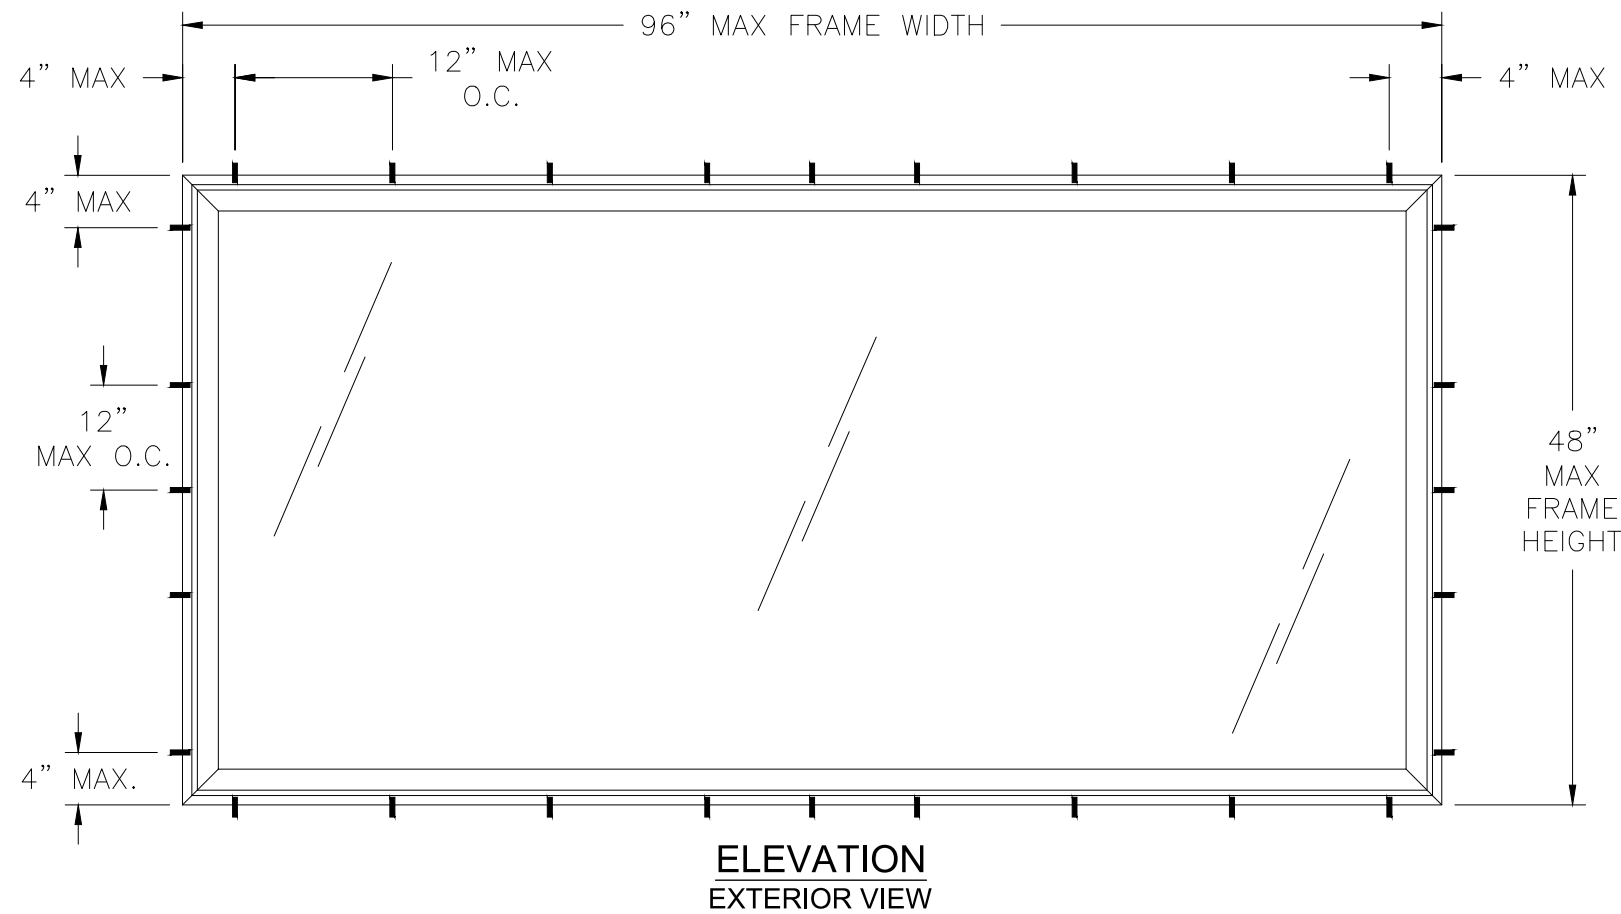

NOTES:

1. MAXIMUM D.L.O.: 90-5/8" X 42-3/4".

TABLE OF CONTENT

SHEET	DESCRIPTION
1	ELEVATION, ANCHORING AND NOTES
2	INSTALLATION DETAILS

DESIGN PRESSURE RATING (PSF)	IMPACT RATING
+55.0/-55.0	LARGE AND SMALL MISSILE IMPACT

HVHZ AND WIND ZONE 4, MISSILE LEVEL D

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE CURRENT FLORIDA BUILDING CODE INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
2. WOOD FRAMING, 2X WOOD BUCK, METAL FRAMING AND CONCRETE/MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND CONCRETE/MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER CONCRETE/MASONRY IS OPTIONAL. WHERE 1X BUCKS ARE USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME AND 1X BUCK INTO CONCRETE/MASONRY SUBSTRATE. WHERE 1X BUCK IS NOT USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME INTO CONCRETE/MASONRY SUBSTRATE. DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. THE PRODUCT SHOWN HEREIN HAS BEEN TESTED TO THE FOLLOWING BY NATIONAL CERTIFIED TESTING LABORATORIES, YORK, PA AND SIGNED AND SEALED BY ROBERT H. ZEIDERS, P.E.
 - 4.1. NCTL-110-16563-1 DATED 10/15/13 TO TAS 201, TAS 202 AND TAS 203.
 - 4.2. NCTL-110-16563-2 DATED 10/15/13 TO ASTM E1886-04/05 AND ASTM E1996-02/04/06/09/012a.
 - 4.3. NCTL-110-16563-3 DATED 10/15/13 TO AAMA/WDMA/CSA 101/I.S. 2/A440-05/08/11.
5. MATERIAL:
 - 5.1. FRAME: EXTRUDED RIGID PVC.
6. GLAZING:
 - 6.1. GLAZING DETAIL AS TESTED: 7/8" NOMINAL O.A. IGU COMPRISED OF FROM EXTERIOR TO INTERIOR - LAMI LITE OF 1/8" ANNEALED GLASS x 0.090" KURARAY AMERICA SENTRYGLAS (SG) INTERLAYER x 1/8" ANNEALED GLASS, DESICCANT STEEL SPACER, 5/32" TEMPERED SACRIFICIAL LITE. INTERIOR GLAZED WITH SIKA SIKAFLEX 552 BACK-BEDDING (OR EQUIVALENT) AND A SNAP-IN TWO (2) LEAF DUAL DUROMETER RIGID VINYL GLAZING BEAD AND 9/16" GLASS BITE.
 - 6.2. AS TESTED GLAZING MEETS ASTM E1300-09a FOR THE DESIGN CONDITIONS SHOWN IN THIS PRODUCT APPROVAL DOCUMENT.
 - 6.3. ALTERNATE GLAZING MEETING THE REQUIREMENTS OF AAMA/WDMA/CSA 101/I.S.2/A440 SHALL BE ALLOWED PER ASTM E1300.
 - 6.4. SETTING BLOCKS IF USED AND/OR WHERE REQUIRED BY THE CURRENT EDITION OF THE FLORIDA BUILDING CODE SHALL BE NEOPRENE WITH A 70 TO 90 SHORE A DUROMETER. GLAZING BEADS (GASKETS) SHALL MEET THE CURRENT EDITION OF THE FLORIDA BUILDING CODE AS REQUIRED.
7. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
8. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
9. FOR ANCHORING INTO CONCRETE/MASONRY USE 3/16" HEX HEAD TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/2" MINIMUM EMBEDMENT INTO CONCRETE WITH 1 1/8" MINIMUM EDGE DISTANCE AND 1" MINIMUM EMBEDMENT INTO MASONRY WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
10. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 PAN HEAD WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 3/4" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
11. FOR ANCHORING INTO METAL STRUCTURE USE #10 PAN OR HEX HEAD SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL WITH 3/4" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS. ANCHOR LOCATIONS HAVE +/- 1" TOLERANCE.
12. ALL FASTENERS TO BE CORROSION RESISTANT.
13. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 13.1. WOOD - MINIMUM SPECIFIC GRAVITY (G) OF 0.42 (NON-HVHZ) AND 0.55 (HVHZ)
 - 13.2. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 2500 PSI
 - 13.3. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90, MEDIUM WEIGHT WITH DENSITY > 117 PCF
 - 13.4. METAL STRUCTURE: STEEL 18GA (0.0428"), 33KSI OR ALUMINUM 6063-T5 0.048" THICK

PROJECT #417-0906

REGENCY PLUS, INC.

2000 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851

TITLE: SERIES 6613 IMPACT VINYL FIXED WINDOW
ELEVATION, ANCHORING AND NOTES

DRAWN BY: RJA

SCALE: N.T.S.

DATE: 1/11/18

PREPARED BY:



Robert J. Amoruso, P.E.
Florida P.E. No. 49752

PTC Product Design Group, LLC
PO Box 520775
Longwood, FL 32752-0775
321-690-1788 info@ptc-corp.com
FBPE Certificate of Authorization
No. 25935

