

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

CertainTeed LLC 20 Moores Road Malvern, PA 19355

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (in Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Unfiltered Rolled Ridge Vent and Filtered Rolled Ridge Vent

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA 19-0513.02 and consists of pages 1 through 5. The submitted documentation was reviewed by *Freddy Semino*





NOA No. 20-0723.39 Expiration Date: 05/02/24 Approval Date: 10/15/20 Page 1 of 5

ROOFING COMPONENT APPROVAL

Category:RoofingSub-Category:VentilationMaterials:Plastic

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	Dimensions	Test <u>Specification</u>	Product <u>Description</u>
Unfiltered Rolled Ridge Vent	Length up to 32 Feet Width 14 Inches Height 1 Inch	TAS-110	Low profile attic ridge vent for installation under ridge shingles.
Filtered Rolled Ridge Vent	Length up to 32 Feet Width 14 Inches Height 1 Inch	TAS-110	Low profile filtered attic ridge vent for installation under ridge shingles.

MANUFACTURING LOCATIONS:

1. Orrick, MO

EVIDENCE SUBMITTED:

<u>Test Agency</u>	Test Name/Report	<u>Test Identifier</u>	Date
PRI Construction Materials Technologies	TAS 100(A)	AVIG-012-02-01	03/14/19
-	ASTM D 1929	AVIG-012-02-02	03/14/19
	ASTM D 2843		
	ASTM D 635		
	ASTM D 638	AVIG-012-02-03	03/14/19
	ASTM G-155		



APPROVED APPLICATIONS

Tradename: System Type:	Unfiltered Rolled Ridge Vent and Filtered Rolled Ridge Vent Mechanical attachment of ridge vent over asphalt shingle roof systems only.
Cutout:	Cut shall be 1-1/2" wide cut slot at the ridge. and 6" shorter at each end than the total length of the ridge vent to be installed.
Installation:	Install vent using 12ga. ring shank nails long enough to penetrate the decking min. 3/16 into the decking, placed through the ridge shingles- 1" from ends of the ridge shingles and 5 7/8" up from exposed edge.
Ridge Shingle:	Install pre-manufactured or field-cut ridge shingles over the ridge vent in compliance with the shingle manufacturer's Notice of Acceptance (NOA) and the installation instructions. Ring shank nails shall be corrosion resistant and long enough to penetrate through the wood deck a minimum of 3/16".
Net Free Area:	Refer to manufacturers published literature.

LIMITATIONS:

- 1. Refer to applicable Building Codes for required ventilation.
- 2. This acceptance is for installations on asphalt shingle roof systems only.
- 3. CertainTeed LLC, Unfiltered Rolled Ridge Vent and Filtered Rolled Ridge Vent shall not be installed on roof mean heights greater than 33 feet.
- 4. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.
- 5. All approved products listed herein shall be labeled and shall bear the imprint or identifiable marking of the manufacturer's name or logo and following statement: "Miami-Dade County Product Control Approved" or the Miami-Dade County Product Control Seal as shown below.







Unfiltered Rolled Ridge Vent

Unfiltered

DETAIL DRAWING

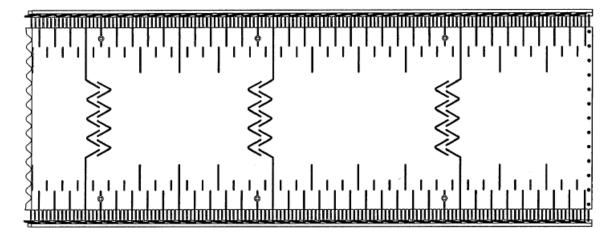

BOTTOM VIEW

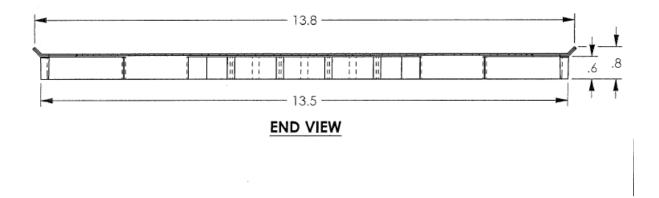


NOA No. 20-0723.39 Expiration Date: 05/02/24 Approval Date: 10/15/20 Page 4 of 5



Filtered Rolled Ridge Vent

Filtered

DETAIL DRAWING

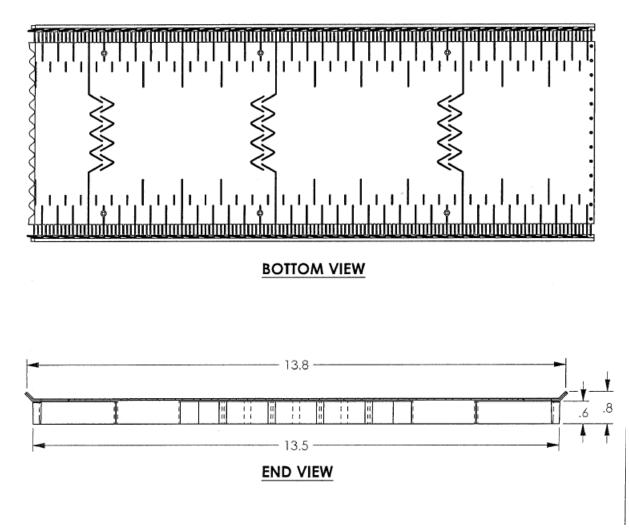

END OF THIS ACCEPTANCE

NOA No. 20-0723.39 Expiration Date: 05/02/24 Approval Date: 10/15/20 Page 5 of 5

