




**HEAD JAMB**

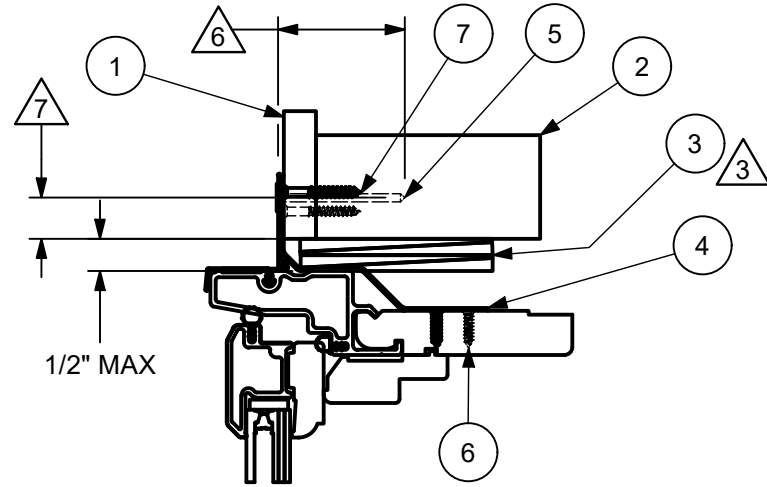


**JAMB**

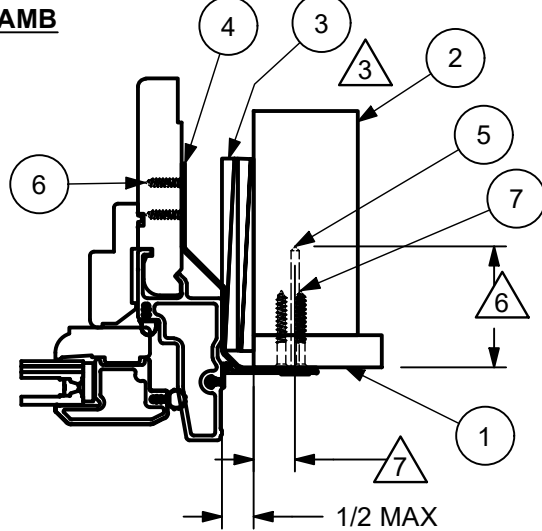

**SILL**

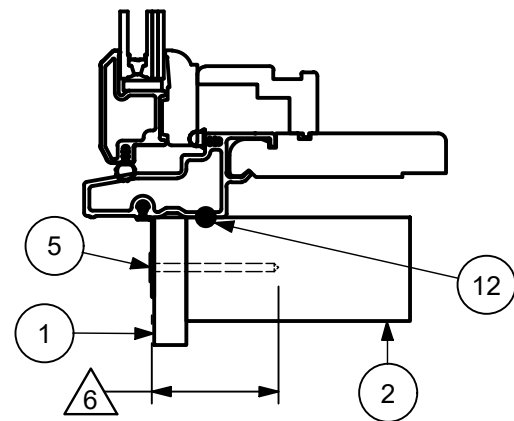

**NAIL FIN WITH CLIPS INSTALLATION**

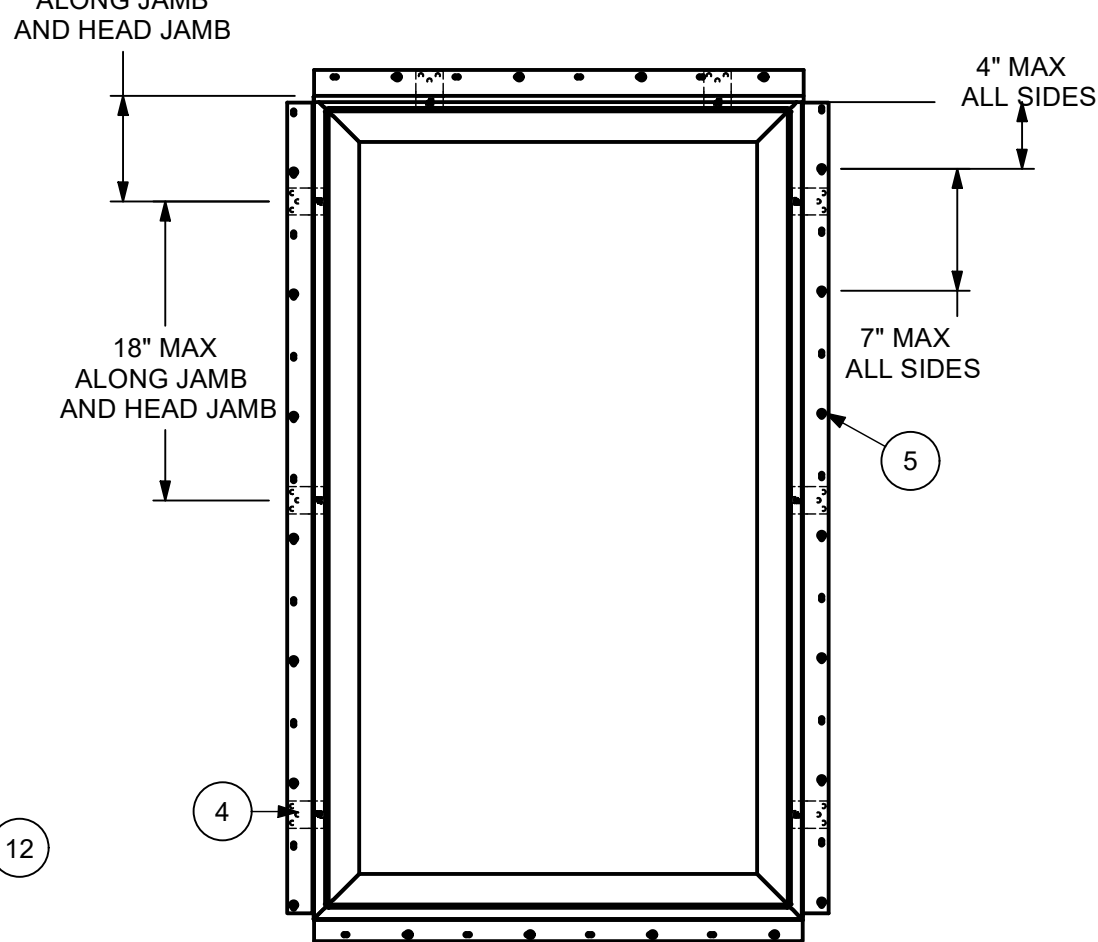


SCALE 1:11

**NAIL FIN WITH CLIPS INSTALLATION:**

- APPLY INSTALLATION CLIP TO UNIT ALONG HEAD JAMB AND JAMBS. FASTEN WITH THREE #7X 5/8" WOOD SCREWS. SPACE PER ELEVATION.
- APPLY 5/16" BEAD OF ASTM C920 GRADE NS, CLASS 25 SEALANT TO BOTTOM OF SILL
- ATTACH INSTALLATION CLIPS TO FRAMING WITH THREE #8 1-1/4" DRYWALL SCREWS
- SECURE NAILING FIN WITH 2" GALVANIZED ROOFING NAILS, MINIMUM OF TWO PER SIDE. SPACE PER THE ELEVATION

TYPE	LAMINATED GLASS MAKEUP
TYPE A	2.2MM (.087") ANN + 2.3 MM (0.091") PVB + 2.2MM (.087") ANN
TYPE B	2.2MM (.087") ANN + 2.3 MM (0.091") SGP + 2.2MM (.087") ANN

**GLAZING DETAIL**

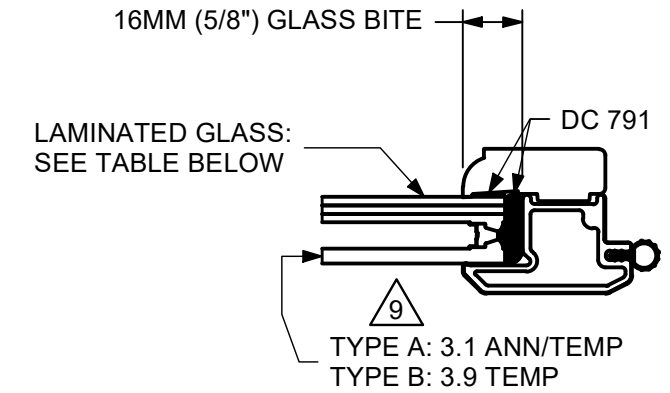

UNIT	MAX FRAME SIZE	DP RATING	GLASS TYPE
ELAWN IZ3	32 X 47 1/8	+55/-65	TYPE A
ELAWN IZ3	48 X 47 1/8	+55/-65	TYPE B
ELCA IZ3	32 X 63 1/8	+55/-65	TYPE A
ELCA IZ3	36 X 71 1/8	+55/-65	TYPE B
ELCA P/TR IZ3	32 X 63 1/8	+55/-65	TYPE A
ELCA P/TR IZ3	56 X 71 1/8	+55/-65	TYPE B
ELCA P/TR IZ3	72 X 55 1/8	+55/-65	TYPE B

**NOTES:**

1. FOR GENERAL SPECIFICATIONS, REFER TO DOC 00003952
2. THIS PRINT IS FOR STRUCTURAL PERFORMANCE ONLY. FOR FLASHING & SEALING INSTRUCTIONS, REFER TO THE INSTALLATION INSTRUCTIONS.
- △ 3. SHIMS:
  - PLACE SHIMS WITHIN 4" - 6" OF EACH CORNER AND SPACE ALL OTHERS EVENLY, A MAXIMUM OF 15" APART
4. IF CHEMICALLY TREATED LUMBER IS USED FOR FRAMING MATERIAL, FASTENERS INTO THE FRAMING MUST BE A MINIMUM OF 0.90 OZ/FT^2 ZINC HOT DIPPED GALVANIZED OR STAINLESS STEEL TYPE 304 OR 316
5. #8 X 1 1/4" PAN HEAD OR WAFFLE HEAD SCREWS MAY BE SUBSTITUTED FOR 2" ROOFING NAILS
- △ 6. MINIMUM NAIL EMBEDMENT DEPTH: 1-15/16"
- △ 7. MINIMUM EDGE DISTANCE: 1/2"
- △ 8. MINIMUM SCREW EMBEDMENT DEPTH: 1-7/16"
- △ 9. GLASS COMPLIES WITH ASTM E1300

ITEM	DWG NO	DESCRIPTION
8	NA	ASTM C920 GRADE NS, CLASS 25 SEALANT
7	NA	#8 1-1/4" DRYWALL SCREW
6	00003212	#7 X 5/8" SCREW
5	NA	2" GAL. ROOF NAIL
4	00050381	INSTALLATION CLIP
3	NA	SHIMS
2	NA	FRAMING MATERIAL
1	NA	SHEATHING

**PARTS LIST**



**COLLECTION:** ELEVATE

**DWG TYPE:** INSTALLATION  
**DESCRIPTION:** INSTALLATION METHODS/ELEVATIONS, NAIL FIN WITH CLIPS, ELAWN IZ3, ELCA IZ3, ELCA P IZ3, ELCA TR IZ3

<b>CHK:</b> JDD 08/30/23	<b>SIZE:</b> B	<b>CLASS:</b> MISC	<b>DWG NO:</b> 00137286
<b>APP:</b> CRR 08/14/23	<b>SCALE:</b> 1:3	<b>DATE:</b> 3/27/2023	<b>DWG BY:</b> Jackie Hernandez <b>SHEET:</b> 1 OF 2

**NOTICE - CONFIDENTIAL INFORMATION**

The information in this document is privileged and strictly confidential. The information contained herein shall be used only by Marvin employees and by those agents or suppliers granted official written permission. If the reader of this document is not the intended recipient, or the employee or agent of the intended recipient, please delete this document from all data storage devices, and destroy all hard copies. Any unauthorized dissemination, distribution, copying or other use of the information contained in this document is strictly prohibited.

REV	DESCRIPTION / REQUESTOR	ECN NO	DATE	REV BY
0.1	ORIGINAL ISSUE	27207	03/27/23	JH