

WINDOW HEIGHT (72" MAX.) TYPICAL ELEVATION WITH FASTENER SPACING WINDOW WIDTH (72" MAX.) FROM CORNERS - WAX. THRU NAIL FIN

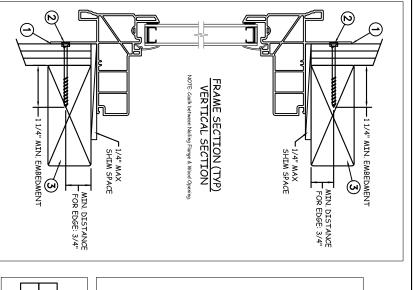

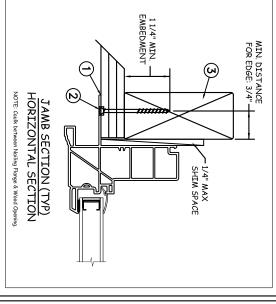

NAIL FIN INSTALLATION

<u>Max Frame</u> BRICKMOULD VINYL DH FIXED 72 × 72 DP RATING|IMPACT +/-50 8

General Notes:

- Seal flange/frame to substrate
- of 1 1/4" into the wood frame. For two (2x) wood frame substrate (Min. S.G. = 0.42). Use #8 x 1 1/4" PH or greater fastener through the nail fin with sufficient length to penetrate a minimum
- ယ project of installation. to the structure. The host structure is the responsibility of the architect or engineer of record for the Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads

window to achieve the rated design pressure up to the size limitations This schedule addresses only the fasteners required to anchor the

conditions. For the complete installation procedure, see the instructions packaged with the window or go to www.jeld-wen.com not address he sealing consideration that may arise in different wall noted. It is not intended as a guide to the installation process and does

DISCLAIMER

except as authorized by JELD-WEN Inc. reproduced or copied in whole or in part or used or disclosed to others This drawing and its contents are confidential and are not to be

General Notes:

- the adopted International Building Code(IBC), the International Residential Code(IRC), the Florida Building Code(FBC), and the industry requirement for the slated conditions The product shown herein is designed, tested and manufactured to comply with the wind load criteria of
- $\omega \sim$ All glazing shall conform to ASTM E1300.
- At minimum, glazing is single strength annealed insulating glass
- 400 Use structural or composite shims where required.
 - Installation methods can be interchanged within the same opening.
- building code An impact protective system is required where wind borne debris protection is mandated by local
- Maximum sizes are buck sizes and do not include fin or flange

00 SHEET 1 OF 1	CAD DWG. No.: REV:	TION:	PLANT NAME AND LOCATION	IDENTIFIER No.
1		2		PART/PROJECT No.: D008249
77")	Nail Fin Installation (7)" x 7)"	Nai Fi		
indow	Brickmould vinyi DH Fixed Window	Brickmou		APPROVED BY:
	- - - !	-	TITLE:	CHECKED BY: J. Goossen
Phone: (800) 535-3936		6	NTS	D. Vezo
Klamath Falls, OR. 97601			SCALE:	DRAWN BY:
3737 Lakeport Blvd			05/09/2016	PROJECT ENGINEER: