

1 1/2" MIN. EMBEDMENT

Min. Distance From Edge:3/4" +

1/4" MAX SHIM SPACE

NAIL

FIN INSTALLATION

General Notes:

Building Code (FBC) and the industry standard requirement for the stated conditions. the adopted International Building Code (IBC), the International Residential Code (IRC), the Florida The product shown herein is designed, tested and manufactured to comply with the wind load criteria of

M Q X

Frame

P

MPACT YES

FRAME JAMB SECTION (TYP)
HORIZONTAL SECTION
NOTE: Caulk between Natiling Flange & Wood Opening

60

+50

<u>6</u>5

- Buck, framing and masonry by others and is responsibility of architect or engineer of record
- α ω 4 All glazing shall conform to ASTM E1300
- Interlayer by Dupont 3.0mm annealed insulating glass At minimum, glazing shall be 5.7mm annealed - 10.1mm airspace - 3.0mm annealed - 2.3mm PVB

Installed Fastener Schedule:


- Seal flange/frame to substrate.
- \sim $^{-1}$ Use #8 PH or greater fasteners through nail fin with sufficient length to penetrate a minimum of 1 1/2" into the wood framing. For 2X wood frame substrate (min. S.G. = 0.42).
- ယ loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation. Host structure (wood buck, stud framing and opening) to be designed and anchored to properly transfer all


packaged with the window or go to www.jeld-wen.com. conditions. For the complete installation procedure, see the instructions not address the sealing consideration that may arise in different wall noted. It is not intended as a guide to the installation process and does window to achieve the rated design pressure up to the size limitations This schedule addresses only the fasteners required to anchor the

DISCLAIMER:

except as authorized by JELD-WEN Inc. reproduced or copied in whole or in part or used or disclosed to others This drawing and its contents are confidential and are not to be

| > | | | ! | |
|--|-------------------------------------|------------|--------------------------|------------------------|
| REV: N SHEET | CAD DWG. No. | TION: | PLANT NAME AND LOCATION: | IDENTIFIER No. |
| | | | | D009404 |
| Ixed Window | Siteline Clad Casement Fixed Window | Siteline C | | APPROVED BY: D.STOKES |
| | | | TITLE: | CHECKED BY: K.CAMPBELL |
| PHONE: (800) 535-3936 | 4 | | NTS | J. HAWKINS |
| 3737 LAKEPORT BLVD. KLAMATH FALLS OR. 97601 | | T | 10/6/2016 | PROJECT ENGINEER: |

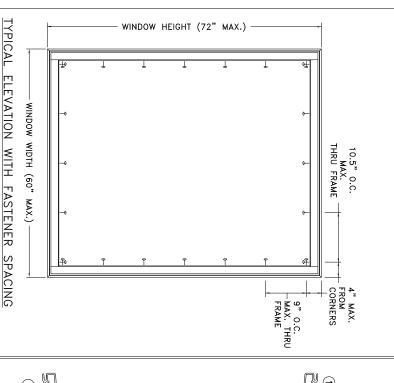

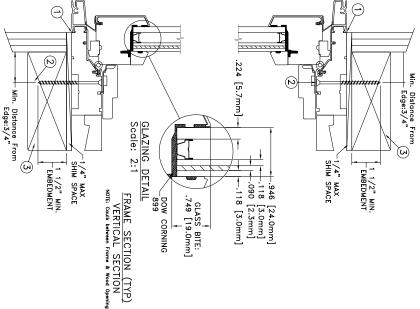

Min. Distance Edge:3/4 1 1/2" MIN. EMBEDMENT <u>(v)</u> THROUGH FRAME -1/4" MAX SHIM SPACE INSTALLATION FRAME JAMB SECTION (TYP) HORIZONTAL SECTION NOTE: Caulk between Frame & Wood Opening.

Max 60, <u>Frame</u> +50, 9 /-65 MPACT YES

Installed Fastener Schedule:

Seal flange/frame to substrate.

ယ

- N the wood framing. For 2X wood frame substrate (min. S.G. = 0.42). Use #8 PH or greater fasteners through nail fin with sufficient length to penetrate a minimum of 1 1/2" into
- project of installation. loads to the structure. The host structure is the responsibility of the architect or engineer of record for the Host structure (wood buck, stud framing and opening) to be designed and anchored to properly transfer all

General Notes:

- the adopted International Building Code (IBC), the International Residential Code (IRC), the Florida Building Code (FBC) and the industry standard requirement for the stated conditions. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of
- Buck, framing and masonry by others and is responsibility of architect or engineer of record
- All glazing shall conform to ASTM E1300.

0 2 4


Interlayer by Dupont - 3.0mm annealed insulating glass. At minimum, glazing shall be 5.7mm annealed - 10.1mm airspace - 3.0mm annealed - 2.3mm PVB


| packaged with the window or go to www.ield-wen.com. |
|---|
| conditions. For the complete installation procedure, see the instructions |
| not address the sealing consideration that may arise in different wall |
| noted. It is not intended as a guide to the installation process and does |
| window to achieve the rated design pressure up to the size limitations |
| This schedule addresses only the fasteners required to anchor the |

DISCLAIMER:

except as authorized by JELD-WEN Inc. reproduced or copied in whole or in part or used or disclosed to others This drawing and its contents are confidential and are not to be

| | | | K.CAMPE | | |
|--------------------------|------------------------------|-------------------------------------|------------|-----------------------|---------------------|
| IDENTIFIER NO. | PART/PROJECT No.: D009404 | APPROVED BY: D.STOKES | J.HAWKINS | PROJECT ENGINEER: | |
| PLANT NAME AND LOCATION: | | | SCALE: NTS | 10/6/2016 | |
| | | siteline Cla | | | |
| CAD DWG. No. | | Siteline clad Casement Fixed Window | W | | |
| > | | ed Wind | PHO | 37 KI AMA- | |
| SHEET | | OW. | | PHONE: (800) 535-3936 | 3737 LAKEPORT BLVD. |

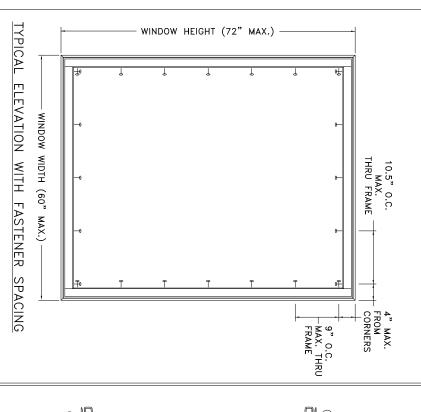

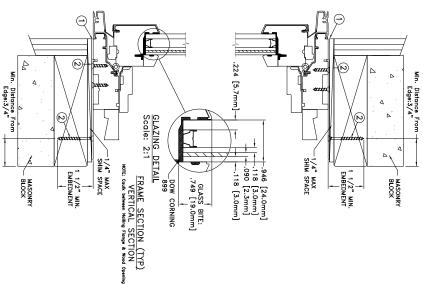

n. Distance n Edge:3/4

> 1 1/2" MIN. -EMBEDMENT

-1/4" MAX
SHIM SPACE

MASONRY STRAF

INSTALLATION

MASONRY

FRAME JAMB SECTION (TYP)
HORIZONTAL SECTION
NOTE: Caulik between Frame & Wood Opening.

General Notes:

The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the Florida Building Code (FBC) and the industry standard requirement for the stated conditions.

60,3×

Frame X 72"

+50,

_65

YES YES

- Buck, framing and masonry by others and is responsibility of architect or engineer of record
- Buck, framing and masonry by others and in the same and in the sa
- At minimum, glazing shall be 5.7mm annealed 10.1mm airspace 3.0mm annealed 2.3mm PVB Interlayer by Dupont 3.0mm annealed insulating glass.

Installed Fastener Schedule:

- Seal flange/frame to substrate.
 Install masonry straps to wood frame
- Install masonry straps to wood frame using #8 corrosion resistant fasteners no more then 4" from each corner and 16" o.c. along the jambs and head. Bend straps around buck and secure with #8 fastener thru masonry strap into buck. Fasteners must be long enough to penetrate at least 1" into framing members.
- 3. Host structure (wood buck, stud framing and opening) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

This schedule addresses only the fasteners required to anchor the window to achieve the rated design pressure up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the window or go to www.jeld-wen.com.

DISCLAIMER

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.

| CHECKED BY: K. CAMPBELL APPROVED BY: D.STOKES PART/PROJECT No.: D009404 | | | J.HAWKINS | PROJECT ENGINEER: |
|---|---------|--|--------------------|---------------------|
| ппе | | | SCALE: NTS | 10/6/2016 |
| Siteline Cla | | | | |
| ad Casement Fixe | | | | |
| ed Window | | | PHO | 37. |
| | | | NE: (800) 535-3936 | 3737 LAKEPORT BLVD. |
| | D009404 | | | SCALE: NTS |