REVISIONS				
REV	DESCRIPTION	DATE	APPROVED	
С	REVISED PROFILES	01/12/23	R.L.	

- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING THE HVHZ.
- 2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
- 4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
- 5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 6. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
- 7. SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
- 8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
- 9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
- 10. FRAME MATERIAL: EXTRUDED ALUMINUM 6063-T5.
- 11. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 7 FOR GLASS DETAILS.
- 12. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
- 13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

SHEET NO.

2

3 - 6

NOTES

INSTALLATION DETAILS

COMPONENTS

- 14. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #14 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 7/16" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 15. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 1/4 TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 16. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #14 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 17. ALL FASTENERS TO BE CORROSION RESISTANT.
- 18. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.
 - C. MASONRY STRENGTH CONFORMANCE TO ASTM C-90, GRADE N. TYPE 1 (OR GREATER).
 - D. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 .125" THICK MINIMUM
- 19. APPROVED CONFIGURATIONS: OX, XO.

SIGNED: 01/17/2023




EASTERN ARCHITECTURAL SYSTEMS

SERIES FWI 1000 ALUMINUM, IMPACT HORIZONTAL SLIDING WINDOW 74 1/8" X 63" NOTES

DESCRIPTION DRAWN: DWG NO. 08-02679 SCALE NTS DATE 04/13/15 OF 7 ELEVATION & GLAZING DETAIL

> L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com





Luis R. Lomas P.E. FL No.: 62514



TABLE OF CONTENTS



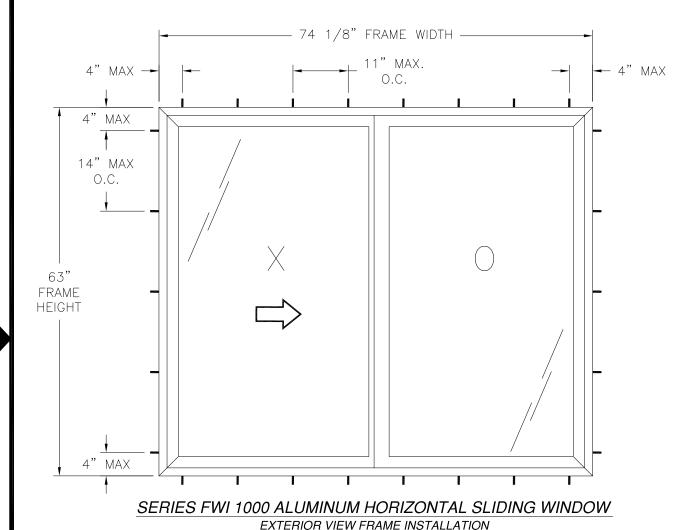

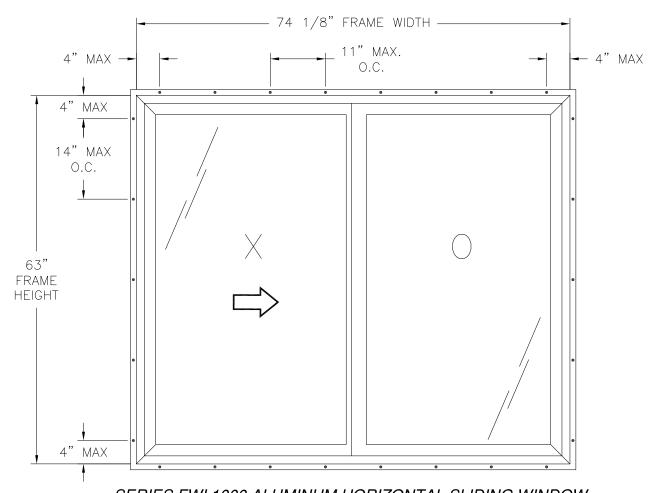

SERIES FWI 1000 ALUMINUM HORIZONTAL SLIDING WINDOW EXTERIOR VIEW FIN INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
+100.0/-120.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 4, AND HVHZ


NOTES

- 1. SASH SIZE: 36 1/2" X 61"
- 2. D.L.O.: 32 5/8" X 56"
- 3. (2) 1 3/8" X 3/16" WEEPHOLES AT FRAME SILL 5" FROM EACH END AND 1" FROM MEETING RAIL.

HARDWARE SCHEDULE


A. (2) METALLIC CAM LOCK, 18" FROM TOP AND BOTTOM RAIL

B. (2) METALLIC SASH TOP GUIDE AT TOP AND BOTTOM OF SASH MEETING RAIL

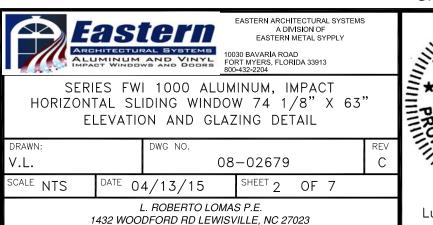



434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/17/2023



uis R. Lomas P.E. FL No.: 62514

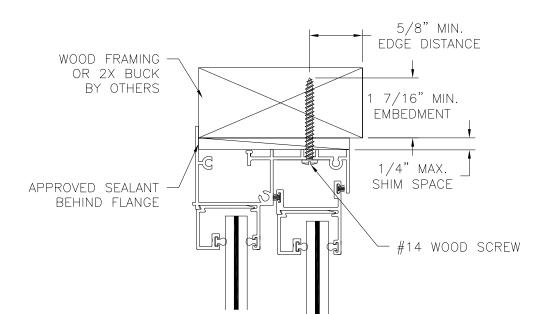

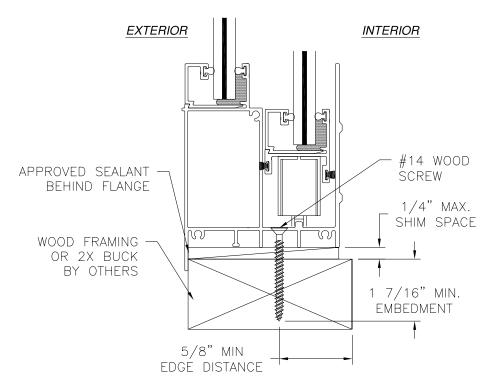


VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS,
NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE
DESIGNED IN ACCORDANCE WITH ASTM E2112


 REVISIONS

 REV
 DESCRIPTION
 DATE
 APPROVED

 C
 REVISED PROFILES
 01/12/23
 R.L.

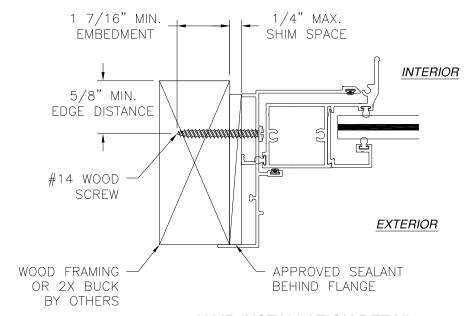



JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION





REVISIONS				
REV	DESCRIPTION	DATE	APPROVED	
C	REVISED PROFILES	01/12/23	R.L.	

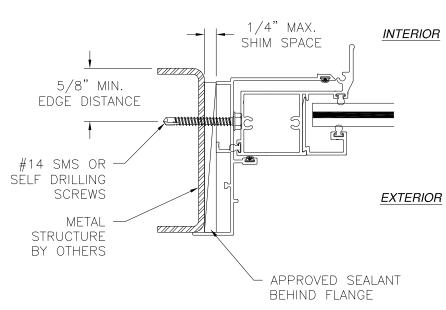


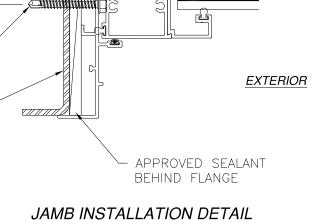


METAL STRUCTURE INSTALLATION

SIGNED: 01/17/2023



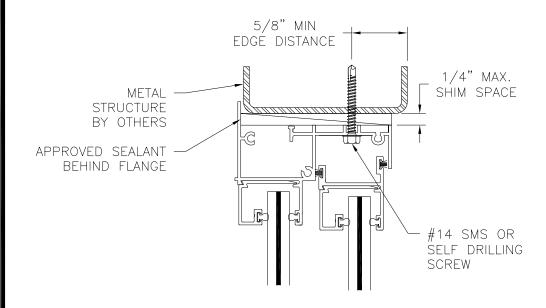


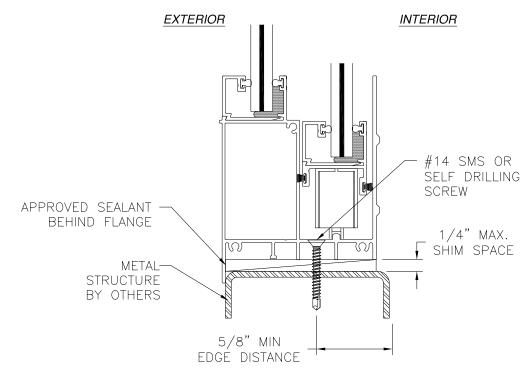


VERTICAL CROSS SECTION METAL STRUCTURE INSTALLATION

NOTES: 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.

2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

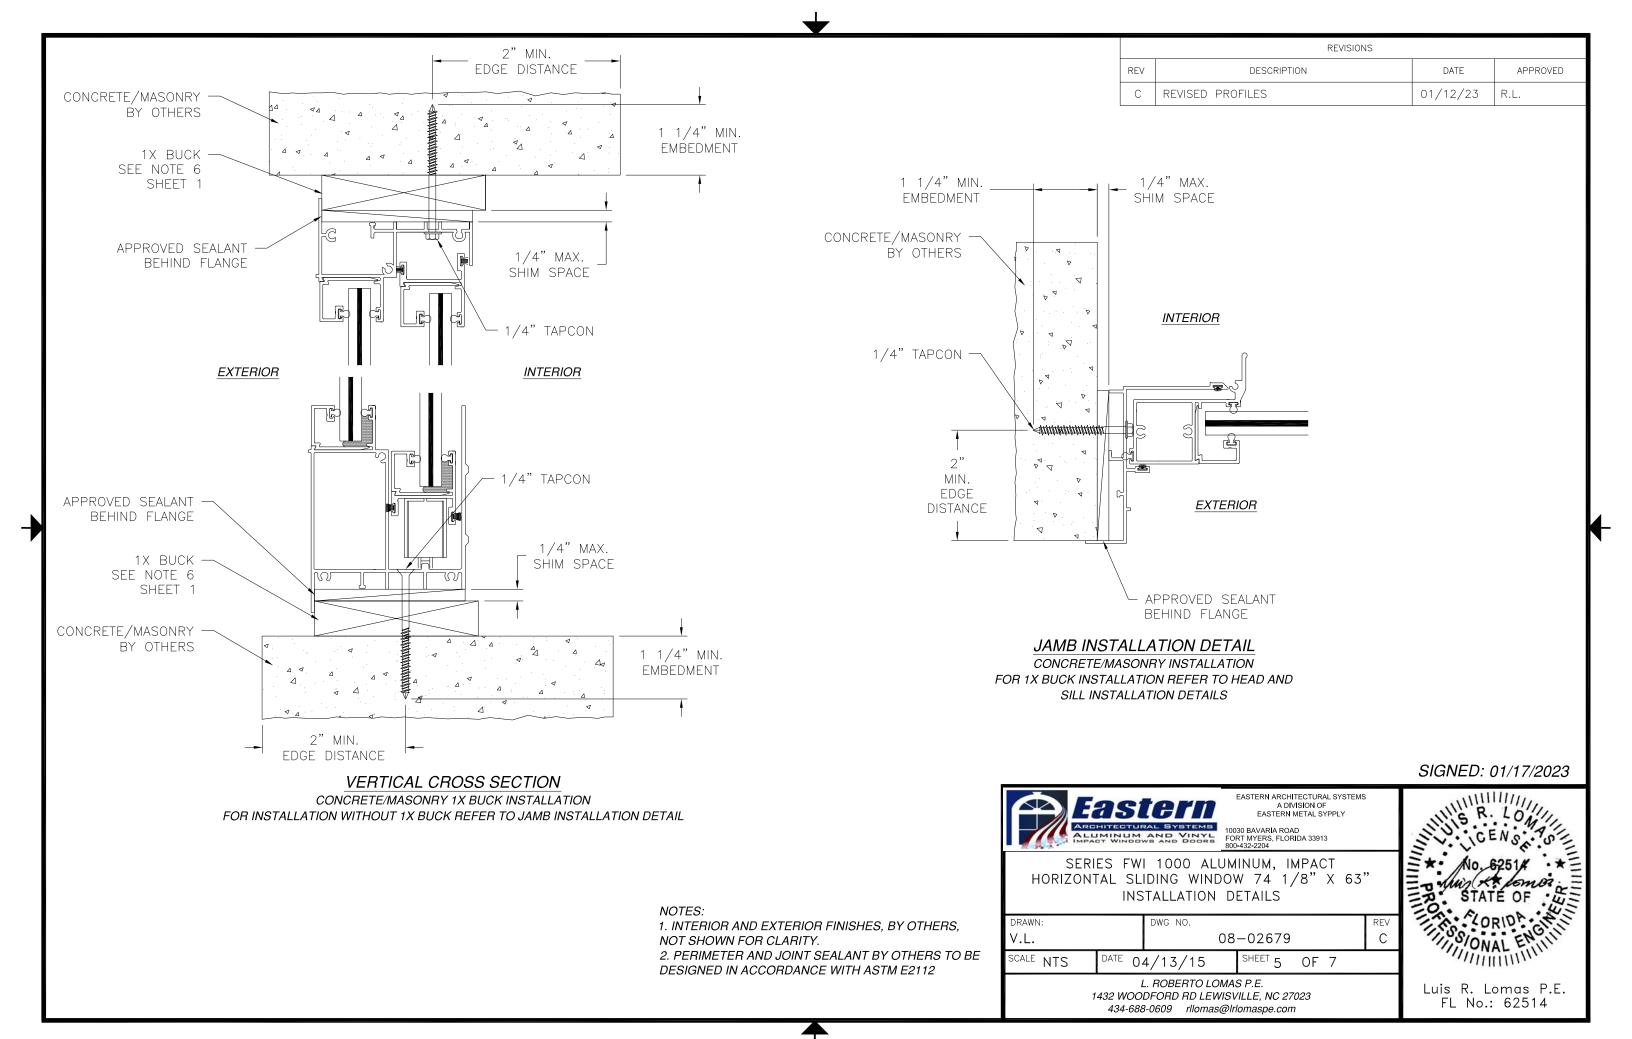


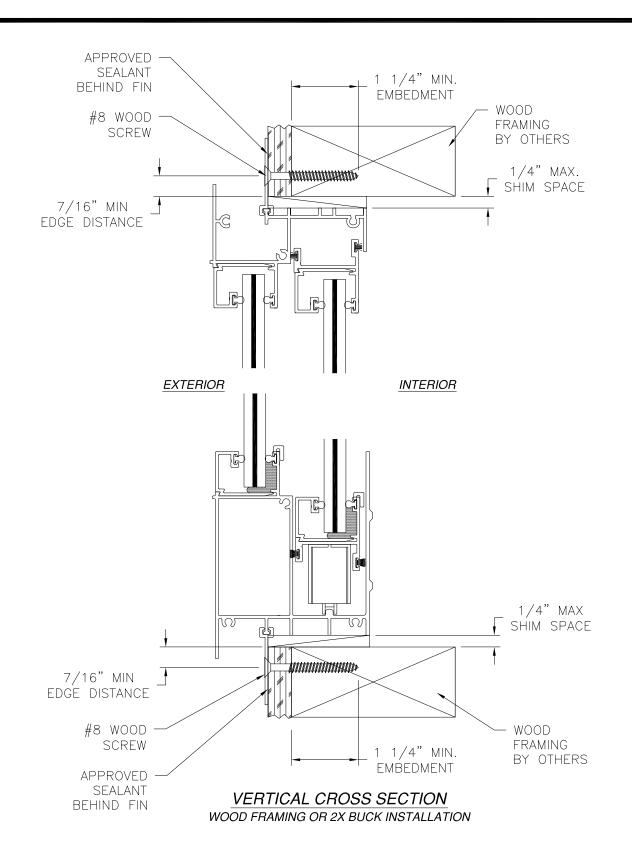

REVISIONS

REV DESCRIPTION DATE APPROVED

C REVISED PROFILES 01/12/23 R.L.

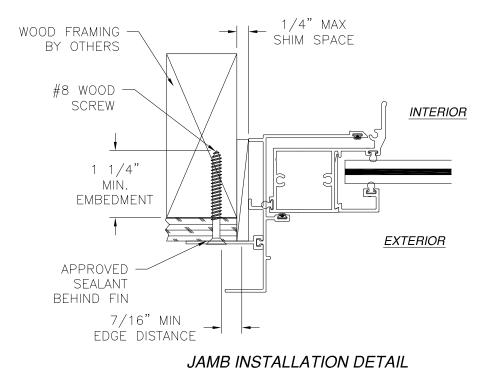

WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/17/2023



