

CECO DOOR PRODUCTS


DIVISION OF ASSA ABLOY DOOR GROUP, INC.

CECO GLAZED PAIRS OF DOORS LARGE MISSILE IMPACT (LMI) - LEVEL "D" HVHZ

NON-SITE-SPECIFIC STRUCTURAL PERFORMANCE EVALUATION. A DESIGN PROFESSIONAL SHALL BE RESPONSIBLE FOR CERTIFYING THE APPLICATION OF THIS INFORMATION TO ANY SITE-SPECIFIC LOCATION.

NOTE REGARDING USE OF THIS DOCUMENT & USE OUTSIDE FLORIDA:

NON-SITE-SPECIFIC STRUCTURAL PERFORMANCE EVALUATION. THIS PRODUCT EVALUATION IS VALID FOR USE IN **FLORIDA ONLY**. USE OF THIS EVALUATION REQUIRES A REVIEW & CERTIFICATION BY A LOCAL DESIGN PROFESSIONAL WHO SHALL BE RESPONSIBLE FOR THE PROPER ADAPTATION OF THIS GENERAL PERFORMANCE EVALUATION TO ANY SITE-SPECIFIC PROJECT. CONTACT THIS OFFICE AT ENGINEERINGEXPRESS.COM/QUOTE FOR ASSISTANCE WITH YOUR PROJECT-SPECIFIC NEEDS & FOR ADAPTATION & CERTIFICATION OF THIS DOCUMENT OUTSIDE OF FLORIDA.

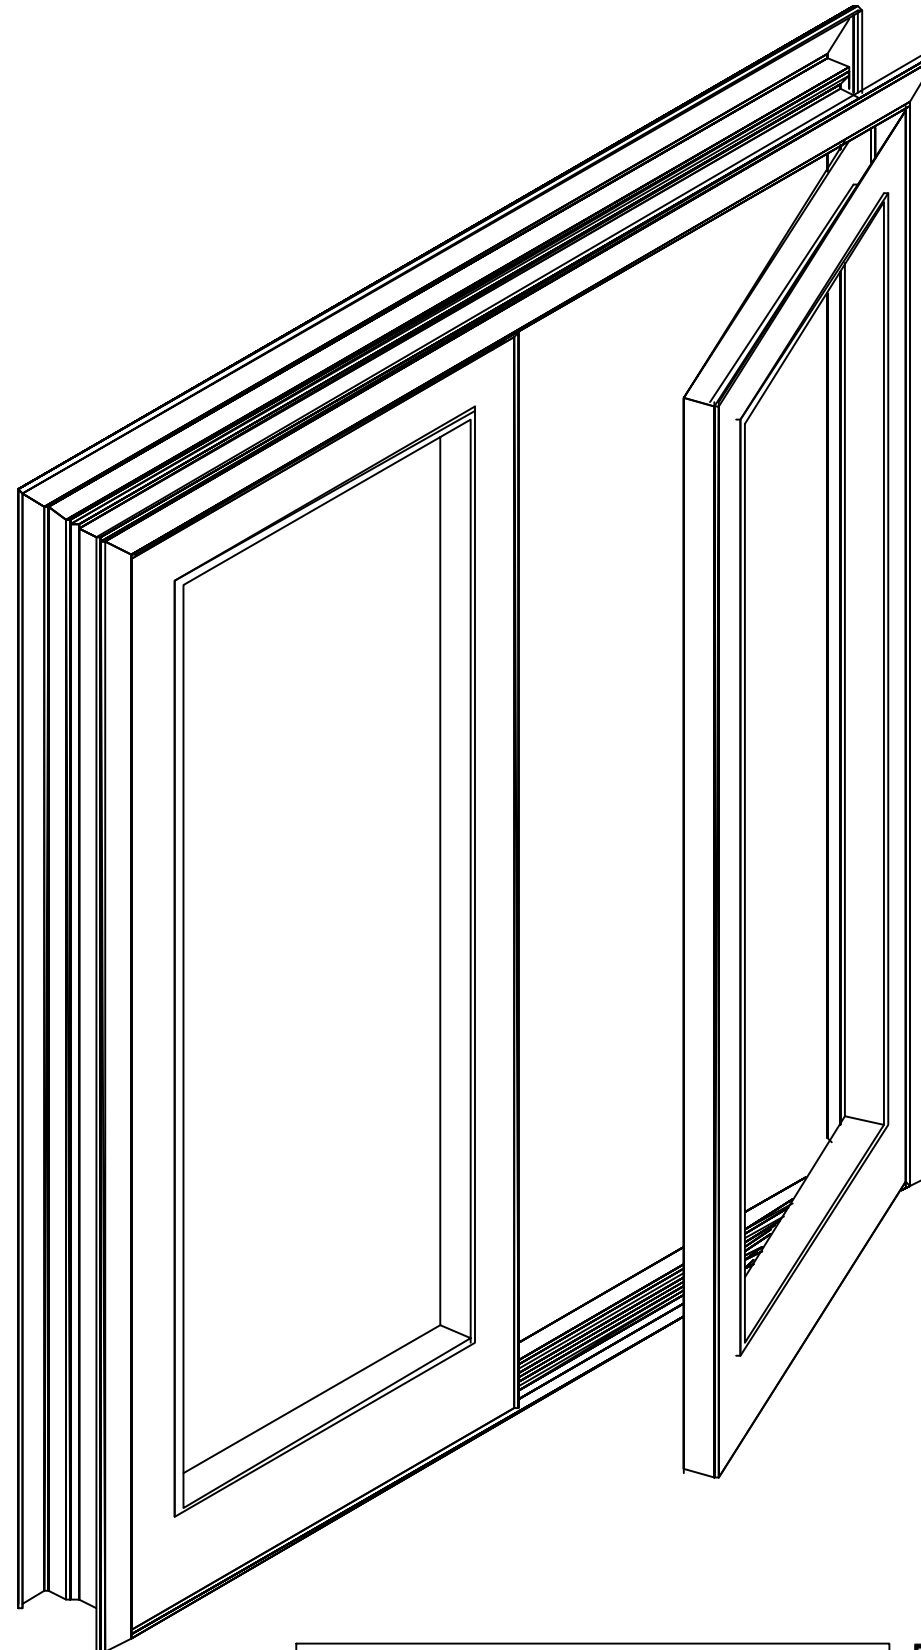

INSTRUCTIONS FOR USING THIS APPROVAL

STEP 1: USE THE DOOR ELEVATIONS PROVIDED ON PAGE 2 THROUGH 4 TO DETERMINE THE APPLICABLE ASSEMBLY NUMBER

STEP 2: MOVE TO THE CHART BELOW THE DOOR ELEVATIONS, ALSO ON PAGE 2 THROUGH 4, AND LOCATE YOUR ASSEMBLY NUMBER. BY SCANNING HORIZONTALLY THROUGH THE SAME ROW OF YOUR ASSEMBLY NUMBER, YOU WILL BE ABLE TO DETERMINE THE APPROVED **DOOR SERIES, MIN DOOR THICKNESS, MAX DESIGN PRESSURE, MAX DOOR OPENINGS, SWINGING OPTIONS, LATCHING HARDWARE FOR BOTH ACTIVE AND IN ACTIVE PANELS.**

STEP 3: USE PAGES 6 THROUGH 8 TO DETERMINE YOUR GLAZING METHOD

STEP 4: USE PAGE 9 TO DETERMINE YOUR FRAMING PROFILES AND FRAMING CONSTRUCTION OPTIONS

STEP 5: USE THE TABLES ON PAGE 10 AND 11 TO DETERMINE THE ANCHOR TYPE AND SPACING, BASED ON THE YOUR PRESSURE AND SUBSTRATE CRITERIA

STEP 6: USE THE DETAILS PROVIDED ON PAGE 12 AND 13 TO DETERMINE YOUR WEATHERSTRIPPING OPTIONS

SHEET INDEX

# SHEET	DESCRIPTION
1	COVER SHEET
2-4	ASSEMBLY OPTIONS
5	OPTIONAL ASSEMBLY OPTIONS
6-8	GLAZING DETAILS
9	DOOR FRAME DETAILS
10-11	DOOR FRAME ANCHORING INFORMATION
12-13	DOOR FRAME WEATHER STRIPPING INFORMATION
14	MANUFACTURERS AND ENGINEERING NOTES
14	TOTAL

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL# 16355.3



POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.



9159 TELECOM DRIVE
MILAN, TN 38358

COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV:20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

01 OF 14

VISIT ECALC.IO/68038c

FOR SITE-SPECIFIC DEVIATIONS
& MORE INFORMATION ABOUT THIS DOCUMENT
OR SCAN THIS QR CODE
VISIT ENGINEERINGEXPRESS.COM/STORE
FOR ADDITIONAL PLANS, REPORTS & RESOURCES



VISIT ECALC.IO/assaabloy

FOR HELPFUL RESOURCES, SITE
SPECIFIC JOB ORDERING & MORE
INFORMATION ABOUT THIS PRODUCT
& RELATED SERVICES





ASSA ABLOY, the global leader in door opening solutions.

CECO DOOR GLAZED PAIRS OF DOORS


PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885


FL

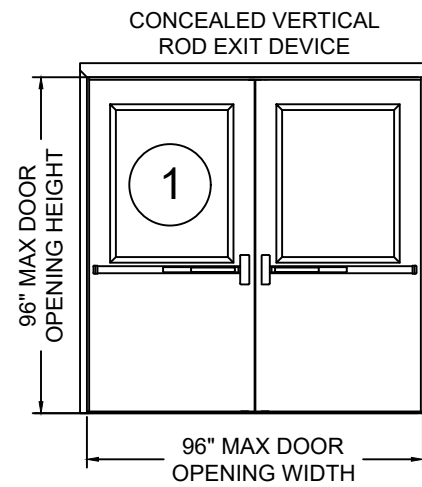

ASSEMBLY 1	
Design Pressure Where Water Infiltration Is NOT Needed	Design Pressure Where Water Infiltration IS Needed
+/-70 PSF	+/-60 PSF

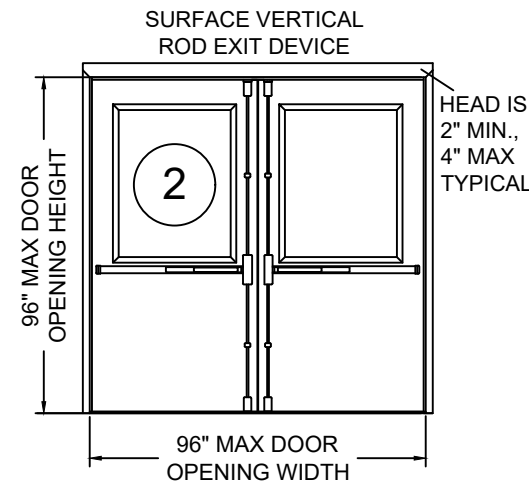

ASSEMBLY 2	
Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required
+/-70 PSF	+/-60 PSF

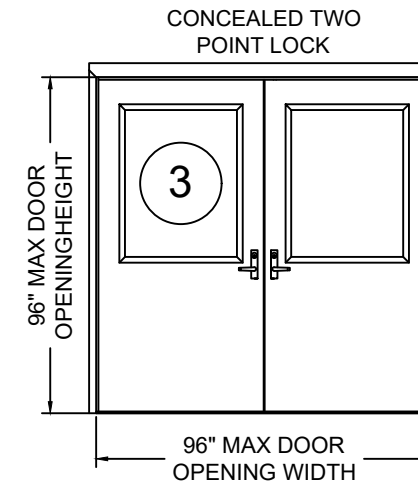

ASSEMBLY 3	
Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Needed
+/-70 PSF	+/-60 PSF

Assembly	Door Series	Minimum Door Gauge	Maximum Design Pressure (psf)		Maximum Door Opening (inches)		Maximum Exposed Glass (inches)		Maximum Area per Leaf (sq. in.)	Door Swing	Latching Hardware Description Active			Latching Hardware Description In-Active		
			Positive	Negative	Width	Height	Width	Height			Type	Brand	Model	Type	Brand	Model
1	Trio, Trio-E ^a	16	70	70	96	96	32	42	1344	Out Swing	Concealed Vertical Rod	Sargent	HC-MD-8600, HC-MD-12-8600, WS-MD-8600, WS-MD-12-8600	Concealed Vertical Rod	Sargent	HC-MD-8600, HC-MD-12-8600, WS-MD-8600, WS-MD-12-8600
2	Trio, Trio-E ^a	16	70	70	96	96	32	42	1344	Out Swing	Surface Vertical Rod	Corbin Russwin Sargent Yale	ED5470(B) x M107 HC4-8700, 12-HC4-8700 7170(F)WS	Surface Vertical Rod	Corbin Russwin Sargent Yale	ED5470(B) x M107 HC4-8700, 12-HC4-8700 7170(F)WS
3	Trio, Trio-E ^a	16	70	70	96	96	32	42	1344	Out Swing	Concealed Two Point Lock	Sargent Corbin Russwin	WS-12-7000, HC-12-7000 MP9800 (A/B) x M107	Concealed Two Point Lock	Sargent Corbin Russwin	WS-12-7000, HC-12-7000 MP9800 (A/B) x M107
a - Glazing may be Glasslam Safety Plus II;																
Hinges**	Butt	McKinney 4-1/2" x 4-1/2" 0.134" thick steel hinges or any FBC approved hinges may be used. Any SDI member hinge locations may be used.														
	Continuous	Markar FM100, FM200, FM300, FM3500, FM100, or FM1111; Pemko CFMSLF-HD continuous hinges may be used. Any FBC approved continuous hinge may														
	Pivots	Rixson 195 Pivot set with M19 intermediate pivots may be used. Any FBC approved pivot may be used.														
Auxiliary Hardware	1" diameter preparations for door position switches, Door position switches that fit in a cutout measuring 1.25" x 4.875", and Securitron EPT, EPTL, CEPT and SEPT maybe used. Maglocks may be used in addition to the hardware listed above. Viewers with 1" and smaller hole preparation may be used.															

*In-Swing Configurations not approved for water infiltration.
See Hardware notes for additional Hardware options.

** SUBSTITUTIONS, WITH FBC COMPONENT APPROVALS, MAY BE USED AS LONG AS THE SUBSTITUTIONS ARE WITHIN THE LIMITING DESIGN PARAMETERS OF THIS APPROVAL AND THE COMPONENT APPROVAL.

FL# 16355.3

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
CecoDoor
ASSA ABLOY
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

02 OF 14


c:\users\ariel\engineering\express\production - documentos\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg

CECO DOOR GLAZED PAIRS OF DOORS

PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL

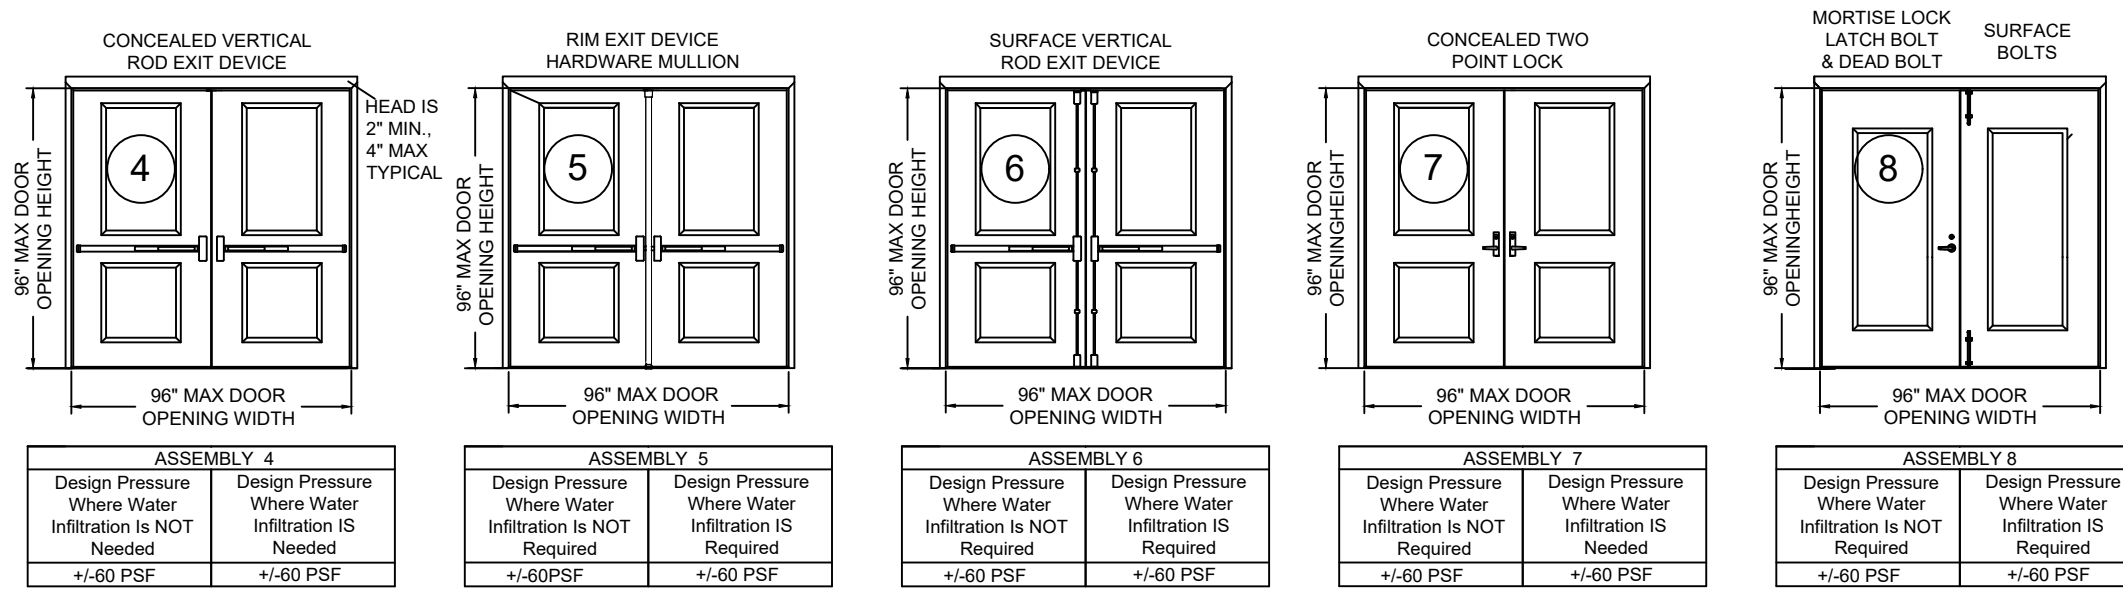

FL# 16355.3

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

ASSEMBLY 4		ASSEMBLY 5		ASSEMBLY 6		ASSEMBLY 7		ASSEMBLY 8	
Design Pressure Where Water Infiltration Is NOT Needed	Design Pressure Where Water Infiltration IS Needed	Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required	Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required	Design Pressure Where Water Infiltration Is NOT Needed	Design Pressure Where Water Infiltration IS Needed	Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required
+/-60 PSF	+/-60 PSF	+/-60PSF	+/-60 PSF	+/-60 PSF	+/-60 PSF	+/-60 PSF	+/-60 PSF	+/-60 PSF	+/-60 PSF

Assembly	Door Series	Minimum Door Gauge	Maximum Design Pressure (psf)		Maximum Door Opening (inches)		Maximum Exposed Glass (inches)		Maximum Area per Leaf (sq. in.)	Door Swing	Latching Hardware Description Active			Latching Hardware Description In-Active		
			Positive	Negative	Width	Height	Width	Height			Type	Brand	Model	Type	Brand	Model
4	Medallion, Legion, Omega, Regent, Ultra ^{a,b,c}	16	60	60	96	96	24	66	1584	Out Swing	Concealed Vertical Rod	Sargent	HC-MD-8600, HC-MD-12-8600, WS-MD-8600, WS-MD-12-8600	Concealed Vertical Rod	Sargent	HC-MD-8600, HC-MD-12-8600, WS-MD-8600, WS-MD-12-8600
5	Medallion, Legion, Omega, Regent, Ultra ^{a,b,c}	16	60	60	96	96	24	66	1584	Out Swing	Rim Exit Device	Corbin Russwin ED5200S(A) x M107 Sargent HC8800, 12-HC8800 Yale 7150(F)WS/7250M(F)WS	Rim Exit Device	Corbin Russwin ED5200S(A) x M107 Sargent HC8800, 12-HC8800 Yale 7150(F)WS/7250M(F)WS		
6	Medallion, Legion, Omega, Regent, Ultra ^{a,b,c}	16	60	60	96	96	24	66	1584	Out Swing	Surface Vertical Rod	Corbin Russwin ED5470(B) x M107 Sargent HC4-8700, 12-HC4-8700 Yale 7170(F)WS	Surface Vertical Rod	Corbin Russwin ED5470(B) x M107 Sargent HC4-8700, 12-HC4-8700 Yale 7170(F)WS		
7	Imperial, Medallion, Legion, Omega, Regent, Ultra, Versadoor ^{a,b,c}	16	60	60	96	96	24	66	1584	Out Swing	Concealed Two Point Lock	Sargent WS-12-7000, HC-12-7000 Corbin Russwin MP9800 (A/B) x M107	Concealed Two Point Lock	Corbin Russwin MP9800 (A/B) x M107		
8	Imperial, Medallion, Legion, Omega, Regent, Ultra, Versadoor ^{a,b,c}	16	60	60	96	96	24	66	1584	Out Swing Or In-Swing*	Mortise Lock Latch Bolt & Dead Bolt	Corbin Russwin ML2000, ML20600, ML20700, ML20800, ML20900 Sargent 7800, 8200, R8200 Yale 8800	Surface Bolt	Corbin Russwin 988CR Sargent 988 Yale 988Y		
			a - Glazing may be Glasslam Safety Plus II; c - 70 psf door design required													
			b - Glazing may be 1/4" thick polycarbonate, Width limited to 22", Height limited to 33-1/2"													
Hinges**	Butt	McKinney 4-1/2" x 4-1/2" 0.134" thick steel hinges or any FBC approved hinges may be used. Any SDI member hinge locations may be used.														
	Continuous	Markar FM100, FM200, FM300, FM3500, FM100, or FM1111; Pemko CFMSLF-HD continuous hinges may be used. Any FBC approved continuous hinge may be used.														
	Pivots	Rixson 195 Pivot set with M19 intermediate pivots may be used. Any FBC approved continuous hinge may be used.														
Auxiliary Hardware		1" diameter preparations for door position switches, Door position switches that fit in a cutout measuring 1.25" x 4.875", and Securitron EPT, EPTL, CEPT and Maglocks may be used in addition to the hardware listed above. Viewers with 1" and smaller hole preparation may be used.														

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
ASSA ABLOY
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC UPDATE (PREV:20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®
23-68038c
SCALE: NTS UNLESS NOTED
03 OF 14

*In-Swing Configurations not approved for water infiltration. See Hardware notes for additional Hardware options.

** SUBSTITUTIONS, WITH FBC COMPONENT APPROVALS, MAY BE USED AS LONG AS THE SUBSTITUTIONS ARE WITHIN THE LIMITING DESIGN PARAMETERS OF THIS APPROVAL AND THE COMPONENT APPROVAL.



c:\users\ariel\engineering\express\production - documentos\projects\23-123-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg

CECO DOOR GLAZED PAIRS OF DOORS


PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885


FL

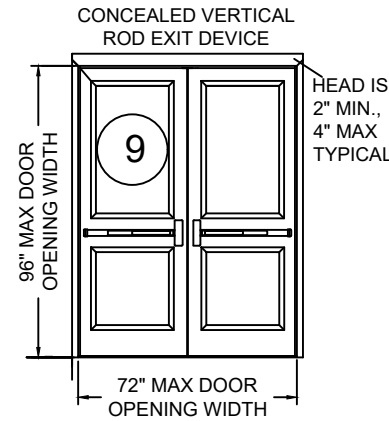

ASSEMBLY 9	
Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required
+/-60 PSF	+/-60 PSF

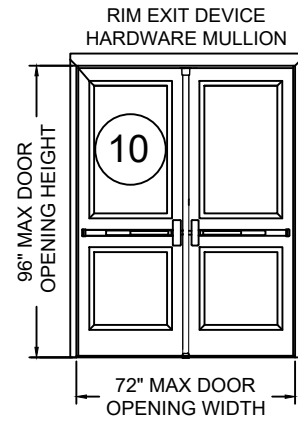


ASSEMBLY 10	
Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required
+/-60PSF	+/-60 PSF

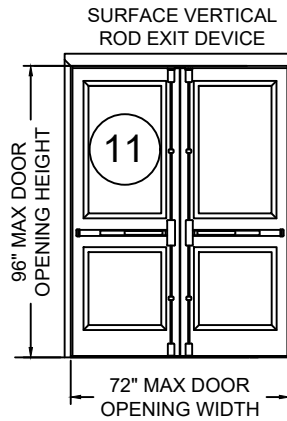

ASSEMBLY 11	
Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required
+/-60 PSF	+/-60 PSF



ASSEMBLY 12	
Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required
+/-60 PSF	+/-60 PSF

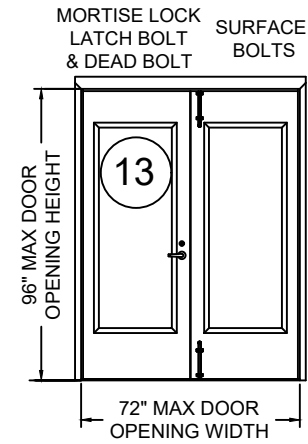

ASSEMBLY 13	
Design Pressure Where Water Infiltration Is NOT Required	Design Pressure Where Water Infiltration IS Required
+/-60 PSF	+/-60 PSF

Assembly	Door Series	Minimum Door Gauge	Maximum Design Pressure (psf)		Maximum Door Opening (inches)		Maximum Exposed Glass (inches)		Maximum Area per Leaf (sq. in.)	Door Swing	Latching Hardware Description Active			Latching Hardware Description In-Active		
			Positive	Negative	Width	Height	Width	Height			Type	Brand	Model	Type	Brand	Model
9	Imperial, Medallion, Legion, Omega, Regent, Ultra, Versadoor ^{a,b}	16	60	60	72	96	24	66	1584	Out Swing	Concealed Vertical Rod	Sargent	HC-MD-8600, HC-MD-12-8600, WS-MD-8600, WS-MD-12-8600	Concealed Vertical Rod	Sargent	HC-MD-8600, HC-MD-12-8600, WS-MD-8600, MD-12-8600
10	Imperial, Medallion, Legion, Omega, Regent, Ultra, Versadoor ^{a,b}	16	60	60	72	96	24	66	1584	Out Swing	Rim Exit Device	Corbin Russwin ED5200S(A) x M107 Sargent HC8800, 12-HC8800 Yale 7150(F)WS/7250M(F)WS	Rim Exit Device	Corbin Russwin ED5200S(A) x M107 Sargent HC8800, 12-HC8800 Yale 7150(F)WS/7250M(F)WS		
11	Imperial, Medallion, Legion, Omega, Regent, Ultra, Versadoor ^{a,b}	16	60	60	72	96	24	66	1584	Out Swing	Surface Vertical Rod	Corbin Russwin ED5470 x M107 Sargent HC-8700, 12-HC-8700 Yale 7170(F)WS	Surface Vertical Rod	Corbin Russwin ED5470(B) x M107 Sargent HC-8700, 12-HC-8700 Yale 7170(F)WS		
12	Imperial, Medallion, Legion, Omega, Regent, Ultra, Versadoor ^{a,b}	16	60	60	72	96	24	66	1584	Out Swing	Concealed Two Point Lock	Sargent WS-12-7000, HC-12-7000 Corbin Russwin MP9800 (A/B) x M107	Concealed Two Point Lock	Sargent WS-12-7000, HC-12-7000 Corbin Russwin MP9800 (A/B) x M107		
13	Imperial, Medallion, Legion, Omega, Regent, Ultra, Versadoor ^{a,b}	16	60	60	72	96	24	66	1584	Out Swing Or In-Swing*	Mortise Lock Latch Bolt & Dead Bolt	Corbin Russwin ML2000, ML20600, ML20700, ML20800, ML20900 Sargent 7800, 8200, R8200 Yale 8800	Surface Bolt	Corbin Russwin 988CR Sargent 988 Yale 988Y		
Hinges**		Butt	McKinney 4-1/2" x 4-1/2" 0.134" thick steel hinges or any FBC approved hinges may be used. Any SDI member hinge locations may be used.													
		Continuous	Markar FM100, FM200, FM300, FM3500, FM100, or FM1111; Pemko CFMSLF-HD continuous hinges may be used. Any FBC approved continuous hinge may be used.													
		Pivots	Rixson 195 Pivot set with M19 intermediate pivots may be used. Any FBC approved pivot may be used.													
Auxiliary Hardware		1" diameter preparations for door position switches, Door position switches that fit in a cutout measuring 1.25" x 4.875", and Securitron EPT, EPTL, CEPT and SEPT maybe used. Maglocks may be used in addition to the hardware listed above. Viewers with 1" and smaller hole preparation may be used.														

*In-Swing Configurations not approved for water infiltration. See Hardware notes for additional Hardware options.

** SUBSTITUTIONS, WITH FBC COMPONENT APPROVALS, MAY BE USED AS LONG AS THE SUBSTITUTIONS ARE WITHIN THE LIMITING DESIGN PARAMETERS OF THIS APPROVAL AND THE COMPONENT APPROVAL.

FL# 16355.3

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
CecoDoor
ASSA ABLOY
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC UPDATE (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

04 OF 14


c:\users\ariel\engineering\express\production - documentos\projects\23-123-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg

CECO DOOR GLAZED PAIRS OF DOORS


PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



OPTIONAL ELEVATIONS

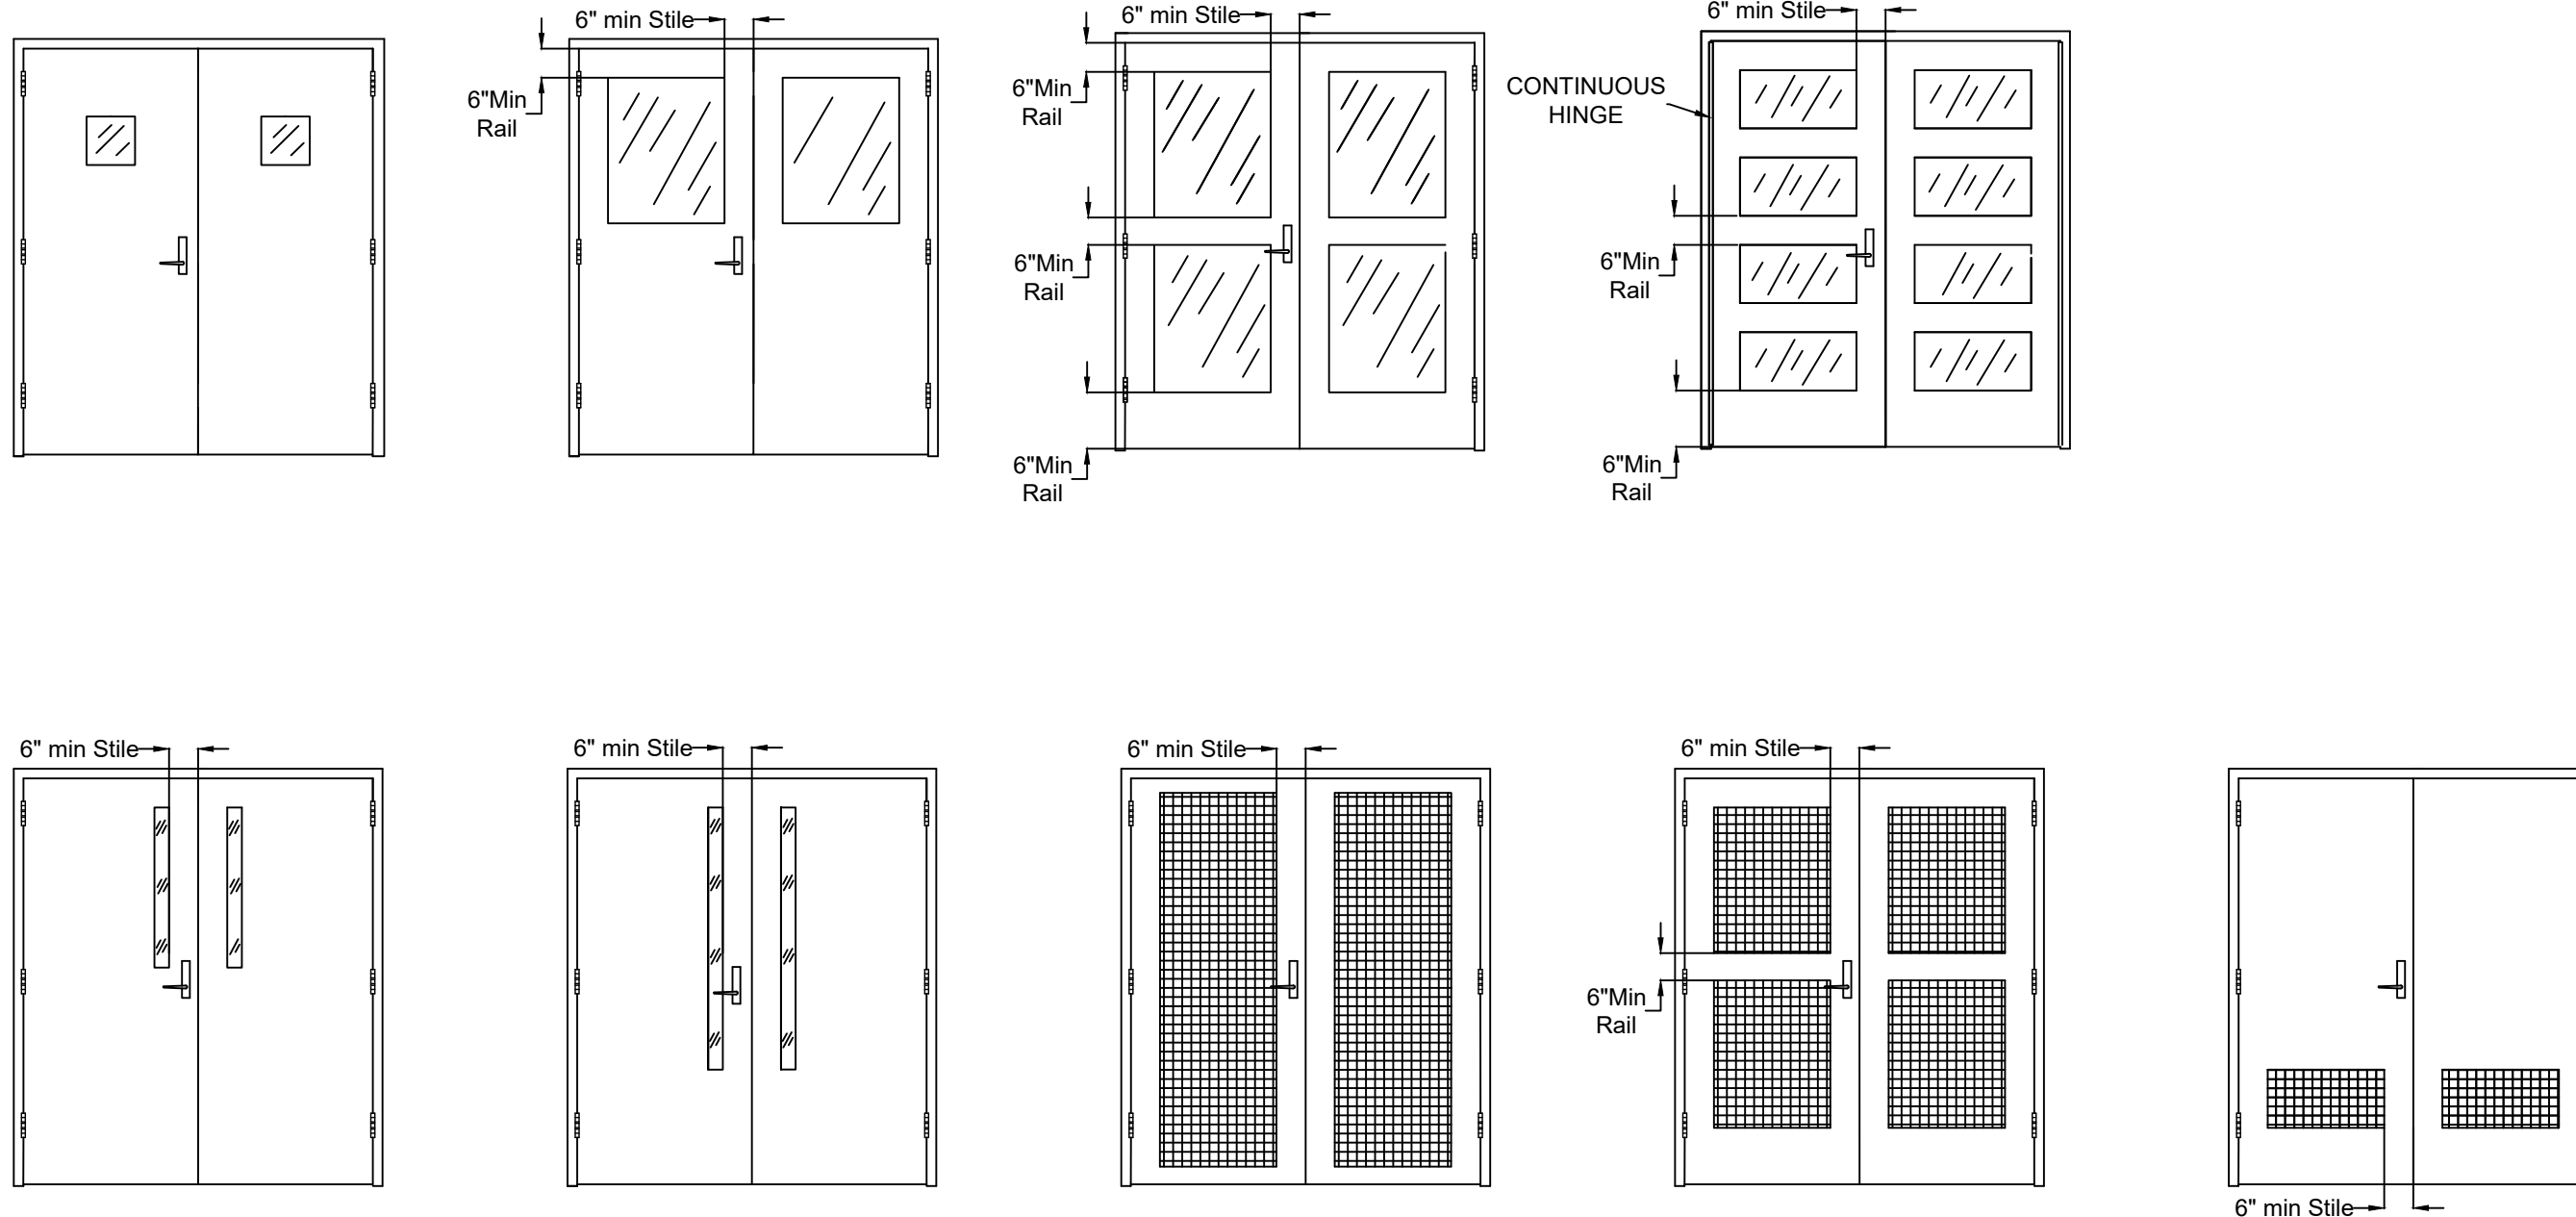

FL# 16355.3

ENGINEERING EXPRESS
 POSTAL ADDRESS:
 2234 NORTH FEDERAL HWY #7664
 BOCA RATON, FL 33431
 ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
 DIVISION OF ASSA ABLOY DOOR GROUP, INC.
 9159 TELECOM DRIVE
 MILAN, TN 38358
ASSA ABLOY
 COMMERCIAL STEEL EXTERIOR DOORS
 GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
 FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT. ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC UPDATE (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

05 OF 14

c:\users\ariel\engineering\express\production - documentos\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg

10/18/2023 6:42 PM ARTIEL

CECO DOOR GLAZED PAIRS OF DOORS

PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.


FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



GLAZING OPTION GLASSLAM SAFETY PLUS II LAMINATED GLASS

OR
1/4" THICK MAKROLON POLYCARBONATE
SHEET BY BAYER MATERIAL SCIENCE, LLC

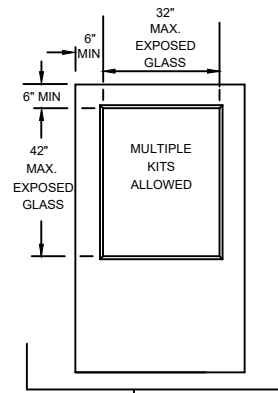


MAX DESIGN PRESSURE +/- 70 PSF

GLASSLAM SAFETY PLUS II AND POLYCARBONATE

- 1.) DESIGN PRESSURE 70 PSF
- 2.) MAXIMUM SIZE 32" X 42"
- 3.) MAXIMUM AREA PER LEAF IS 1344 SQ. IN.
- 4.) MULTIPLE LIGHTS ALLOWED
- 5.) POLYCARBONATE USED IN THE HVHZ MUST HAVE A VALID NOA.

GLAZING OPTION GLASSLAM SAFETY PLUS II LAMINATED GLASS


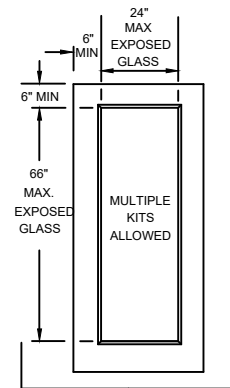


MAX DESIGN PRESSURE +/- 60 PSF


GLASSLAM SAFETY PLUS II

- 1.) DESIGN PRESSURE 60 PSF
- 2.) MAXIMUM GLASS SIZE 24" X 66"
- 3.) MAXIMUM GLASS AREA PER LEAF IS 1584 SQ. IN.
- 4.) MULTIPLE LIGHTS ALLOWED.

ROCKWOOD V-WS LOUVER

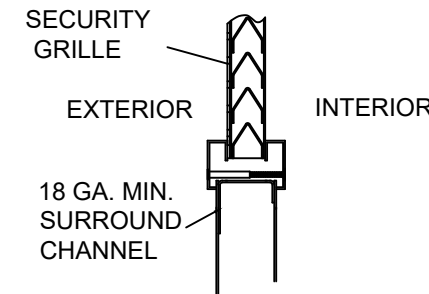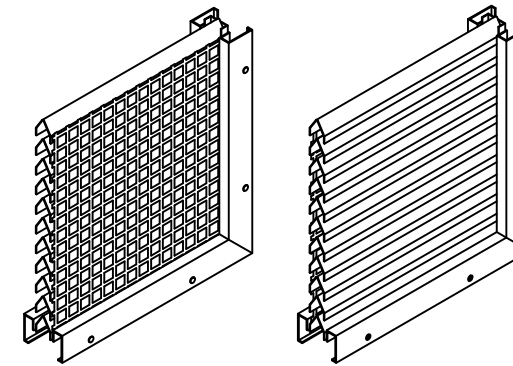

GLAZING OPTION PEMKO LV-WS LOUVER

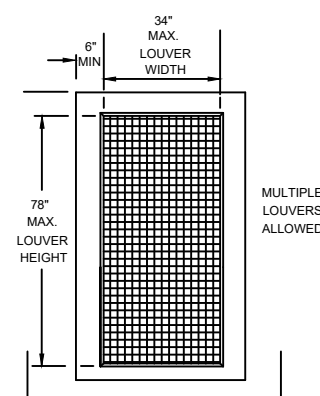

MAX DESIGN PRESSURE +/- 70 PSF

ROCKWOOD LV-WS LOUVER

- 1.) DESIGN PRESSURE - 70 PSF MAX.
- 2.) MAXIMUM LOUVER SIZE IS 34" X 78". MAY BE USED WITH CYLINDRICAL LOCKS AND MORTISE LOCKS. CONTACT FACTORY FOR LIMITATIONS WHEN USING EXIT DEVICES,
- 3.) 6" MINIMUM STILES AND RAILS REQUIRED.
- 4.) MULTIPLE LOUVERS ALLOWED PER DOOR UP TO 3652 SQ. IN.
- 5.) SURROUND CHANNEL REQUIRED.
- 6.) LOUVER NOT QUALIFIED FOR AIR OR WATER INFILTRATION

FL# 16355.3

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

06 OF 14

c:\users\ariel\engineering\express\production - documentos\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg

CECO DOOR GLAZED PAIRS OF DOORS


PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



FL# 16355.3

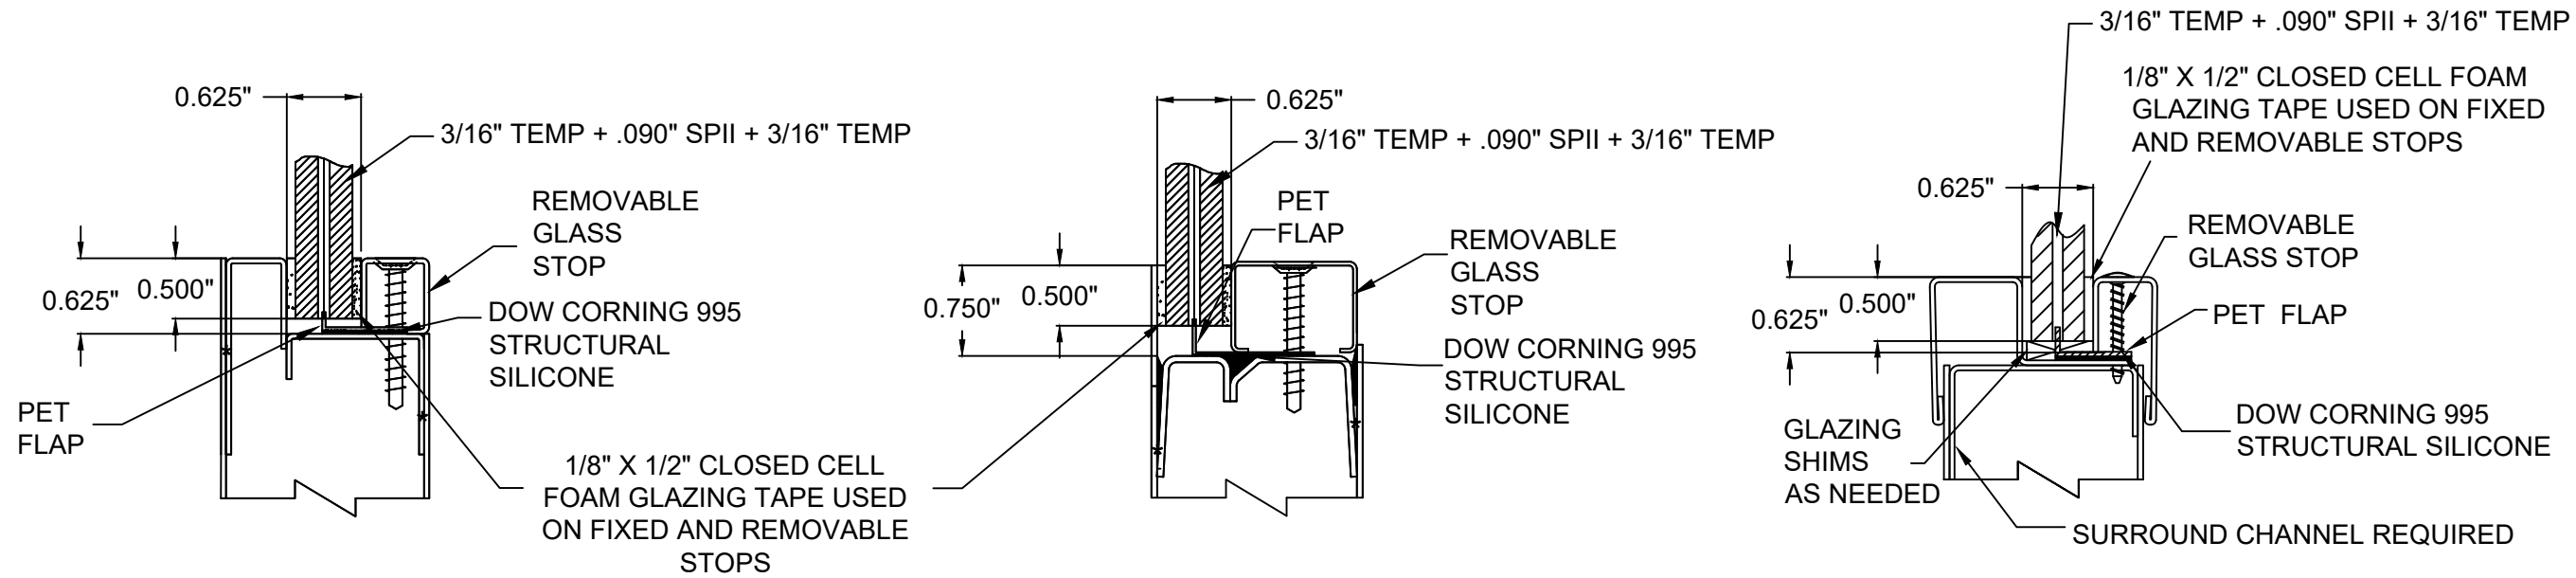

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

GLAZING INSTRUCTIONS

- 1) Before removing the removable stops, check to be sure there are screws in every hole. Pre-drill holes with a #36 bit where there are screw holes but no screws. Do not remove stops.
- 2) Using a pencil, mark alignment marks on the removable stops and the door.
- 3) Unscrew the #6 x 1-1/4" oval head TEK screws from the removable stops and remove the removable stops. Keep the screws.
- 4) Apply 1/8" x 1/2" closed cell foam glazing tape to the fixed stop.
- 5) If there is plastic release on the foam glazing tape, pull the plastic release back about 2" from each end of the foam tape. Pull the plastic release around the fixed stop so it can be grasped after placing the Glasslam on the unexposed foam tape.
- 6) If there is paper release on the foam glazing tape, remove the paper release before glazing. Spray the exposed foam tape with a mild soap solution immediately before placing the Glasslam on the exposed foam tape.
- 7) Place glazing shims, as needed, then set the Glasslam on the foam glazing tape.
- 8) Adjust the Glasslam assembly, as necessary, to center the assembly in the cutout.
- 9) If the release is plastic, grasp the free end of the plastic release, while holding the Glasslam to keep it from moving. Then slowly pull the plastic release off the foam tape that was applied to the fixed stop.
- 10) Trim the PET flap so it does not extend beyond the removable glass stop.
- 11) Take a putty knife and insert it between the PET flap and the edge of the cutout in the door. Using the putty knife pull the PET flap away from the cutout in the door.
- 12) While holding the PET flap back away from the cutout with the putty knife, use a caulking gun to apply Dow Corning 995 silicone between the PET flap and the steel in the cutout of the door.

IMPORTANT: Ensure that the Dow Corning 995 silicone fully wets out or covers the PET flap and comes in contact with the steel around the cutout in the door.

- 13) Slowly move the putty knife around the door ahead of the caulking gun and apply the 995 silicone around the entire cutout in the door.
- 14) Apply 1/8" x 1/2" closed cell foam glazing tape to the removable stop.
- 15) If there is plastic release on the foam glazing tape, pull the plastic release back about 2" from each end of the foam tape. Pull the plastic release around the removable stop so it can be grasped after placing the removable stop.
- 16) If there is paper release on the foam glazing tape, remove the paper. Spray the exposed foam tape with a mild soap solution immediately before placing the removable stops against the Glasslam.
- 17) Using the alignment marks, position the removable stops against the Glasslam.
- 18) Install and tighten the #6 x 1-1/4" oval head TEK screws in the removable stops. Be careful not to over tighten.
- 19) If the release is plastic, grasp the free end of the plastic release, and slowly pull the plastic release off the foam tape that was applied to the removable stop.
- 20) Using the Dow Corning 995 silicone or other high quality silicone, apply a cap bead over the closed cell foam tape on the exterior side of the door vision light kit.

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV:20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

07 OF 14

c:\users\ariel\engineering\express\production - documentos\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg

CECO DOOR GLAZED PAIRS OF DOORS


PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



FL# 16355.3

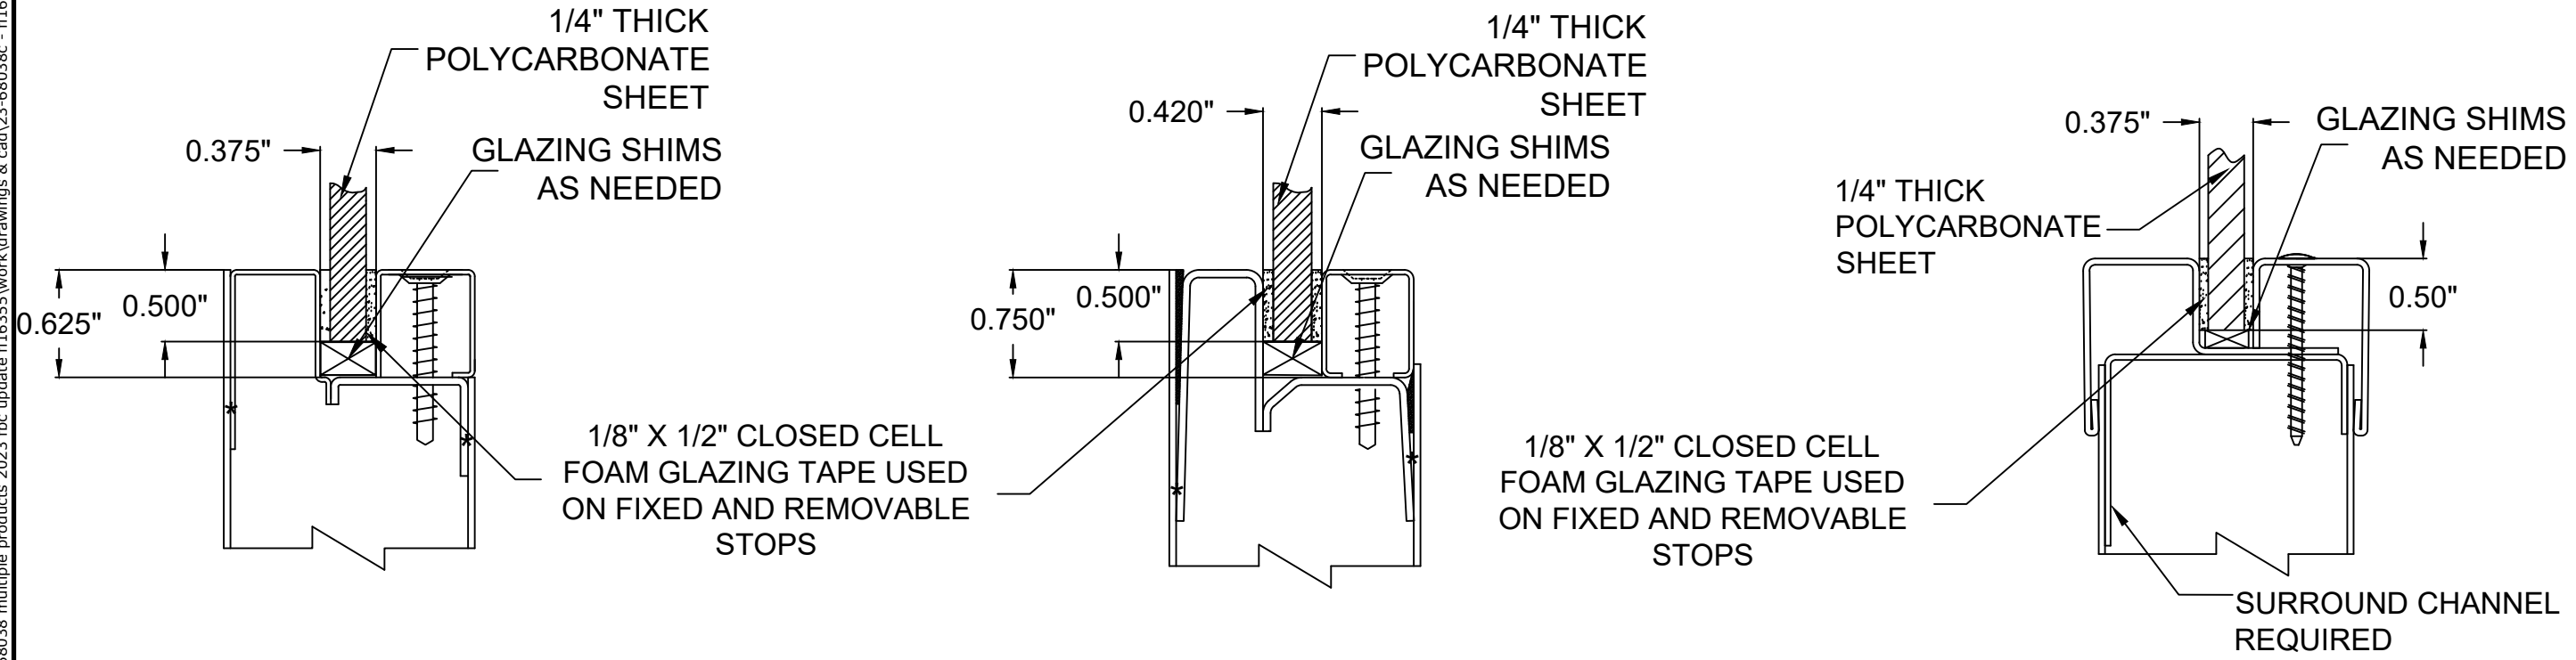

GLAZING INSTRUCTIONS

- 1) Before removing the removable stops, check to be sure there are screws in every hole. Pre-drill holes with a #36 bit where there are screw holes but no screws. Do not remove stops.
- 2) Using a pencil, mark alignment marks on the removable stops and the door.
- 3) Unscrew the glass stop screws from the removable stops and remove the removable stops. Keep the screws.
- 4) Apply 1/8" x 1/2" closed cell foam glazing tape to the fixed stop.
- 5) If there is plastic release on the foam glazing tape, pull the plastic release back about 2" from each end of the foam tape. Pull the plastic release around the fixed stop so it can be grasped after placing the polycarbonate on the unexposed foam tape.
- 6) If there is paper release on the foam glazing tape, remove the paper release before glazing. Spray the exposed foam tape with a mild soap solution immediately before placing the polycarbonate on the exposed foam tape.
- 7) Place glazing shims, as needed, then set the polycarbonate on the foam glazing tape.
- 8) Adjust the polycarbonate, as necessary, to center the polycarbonate in the cutout.
- 9) If the release is plastic, grasp the free end of the plastic release, while holding the polycarbonate to keep it from moving. Then slowly pull the plastic release off the foam tape that was applied to the fixed stop.
- 10) Apply 1/8" x 1/2" closed cell foam glazing tape to the removable stop.
- 11) If there is plastic release on the foam glazing tape, pull the plastic release back about 2" from each end of the foam tape. Pull the plastic release around the removable stop so it can be grasped after placing the removable stop.
- 12) If there is paper release on the foam glazing tape, remove the paper. Spray the exposed foam tape with a mild soap solution immediately before placing the removable stops against the polycarbonate.
- 13) Using the alignment marks, position the removable stops against the polycarbonate.
- 14) Install and tighten the glass stop screws in the removable stops. Be careful not to over tighten.
- 15) If the release is plastic, grasp the free end of the plastic release, and slowly pull the plastic release off the foam tape that was applied to the removable stop.
- 16) Using the Dow Corning 995 silicone or other high quality silicone, apply a cap bead over the closed cell foam tape on the exterior side of the door vision light kit.

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®
23-68038c
SCALE: NTS UNLESS NOTED
08 OF 14


c:\users\ariel\engineering\express\production - documentos\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg 10/18/2023 6:42 PM ARTIEL

CECO DOOR GLAZED PAIRS OF DOORS

PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



FL# 16355.3

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358

CecoDoor
ASSA ABLOY
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)


REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC UPDATE (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®


23-68038c

SCALE: NTS UNLESS NOTED


09 OF 14

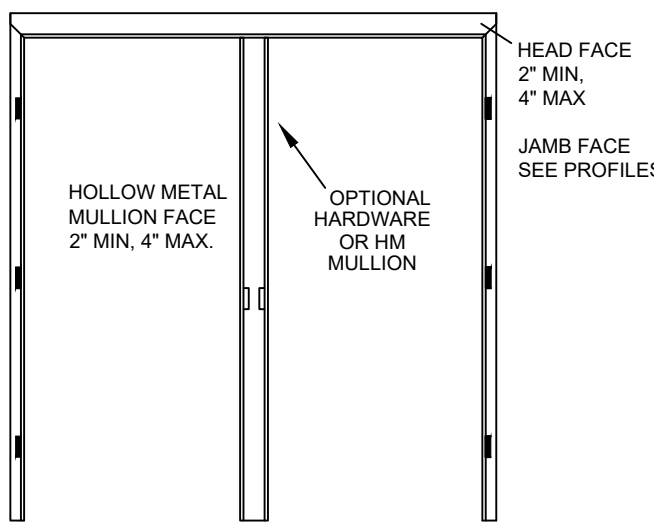

HOLLOW METAL MULLION FACE 2" MIN, 4" MAX.
OPTIONAL HARDWARE OR HM MULLION
JAMB FACE SEE PROFILES
8'0" X 8'0" MAX.
4" MIN./14" MAX. DEPTH
KD 16 GA. MIN.
WELDED 16 GA MIN., 12 GA. MAX.
MAX DESIGN PRESSURE +/-70 PSF
FOUR SIDED DOOR FRAME WITH WELDED CORNERS ALSO PERMITTED

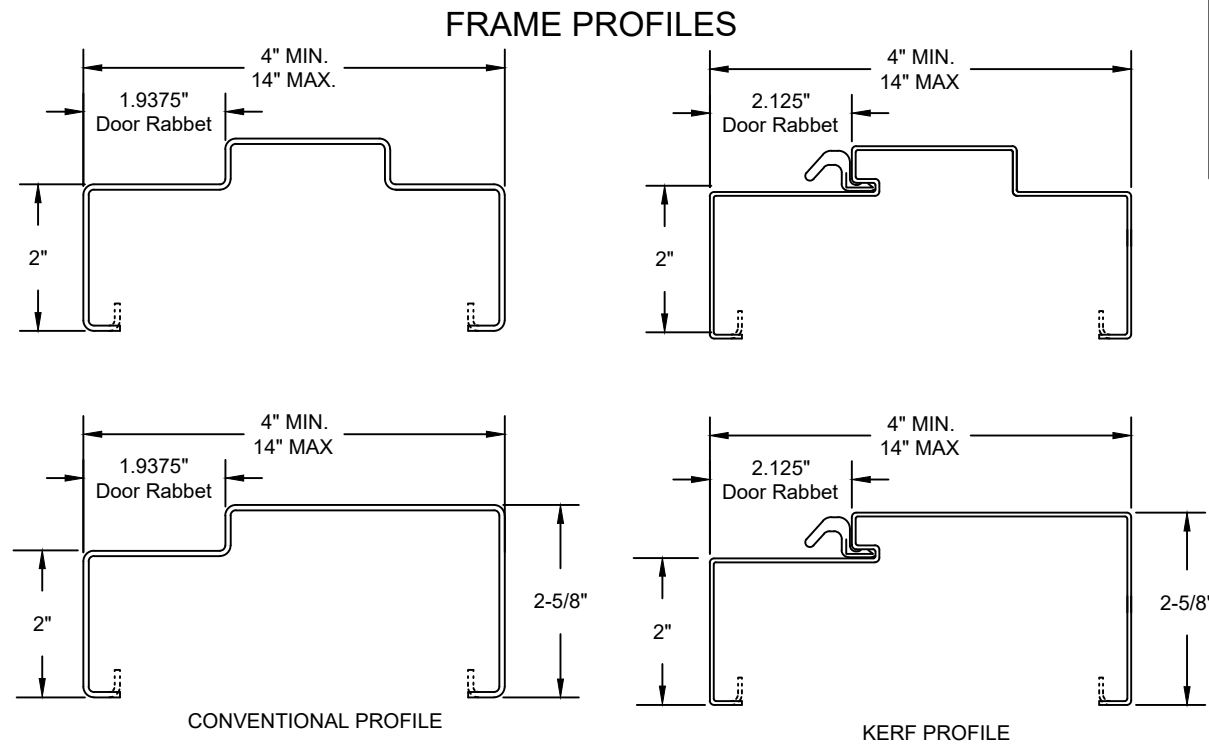

FRAME CONSTRUCTION OPTIONS

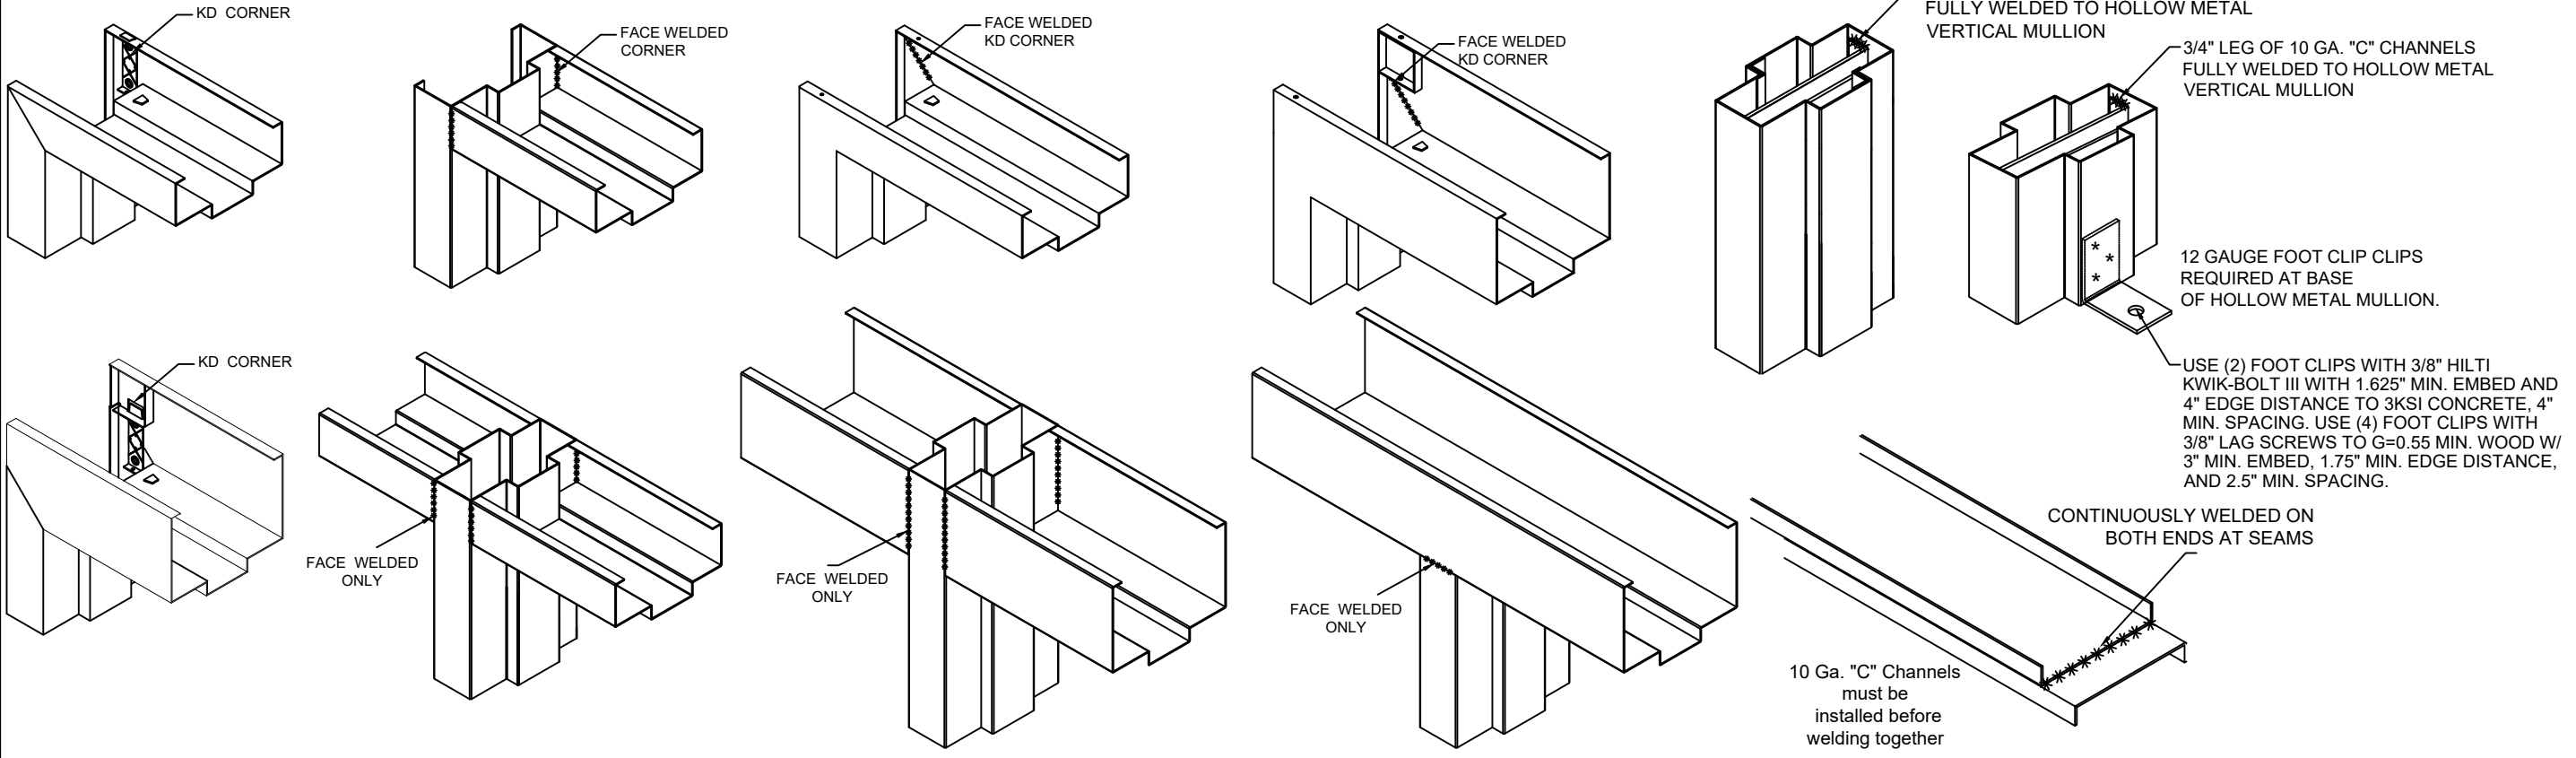

c:\users\ariel\engineering\express\production - documentos\projects\23-123-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg


10/18/2023 6:42 PM ARTIEL

CECO DOOR GLAZED PAIRS OF DOORS

PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



FL# 16355.3

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM




CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23

23-68038c

SCALE: NTS UNLESS NOTED

EXISTING MASONRY OR POURED CONCRETE, 3000 psi MIN.
WELDED PIPE SPACER ANCHOR OR EWA WITH 3/8" EXPANSION ANCHOR BOLTS USING 3/8" GRADE 5 BOLT
MINIMUM EDGE DISTANCE = 4.0"
MAXIMUM SHIM THICKNESS = 0.25"

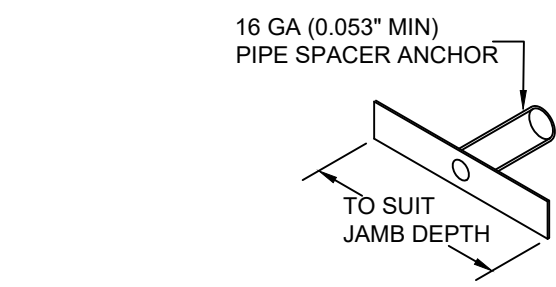
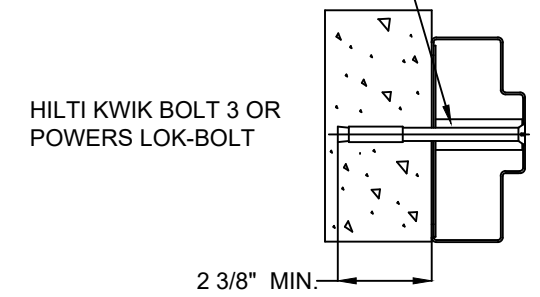


1/4" MAX. THICK A-36 STEEL SHIMS WELDED TO STRUCTURAL BUILDING MEMBER WITH FILLET WELDS MEASURING 2" LONG USING E6018 ELECTRODES. FILLET WELD SIZE SAME AS SHIM THICKNESS FOR 0.053" TO 0.125" SHIM THICKNESS. WELD SIZE 1/8" FOR > 0.125" TO 1/4" SHIM THICKNESS.


STEEL SHIMS WELDED TO BUILDING STRUCTURE
WELD HOLLOW METAL FRAME TO SHIM WITH 3/16" WELD, 1" LONG BOTH SIDES OF FRAME

2" X 7" STEEL SHIM PLATE(S), OR TO SUIT FRAME JAMB DEPTH






MAXIMUM SHIM SPACE 1/4"

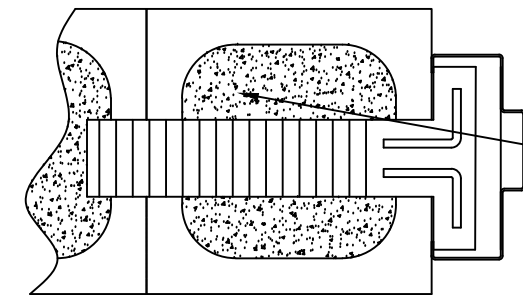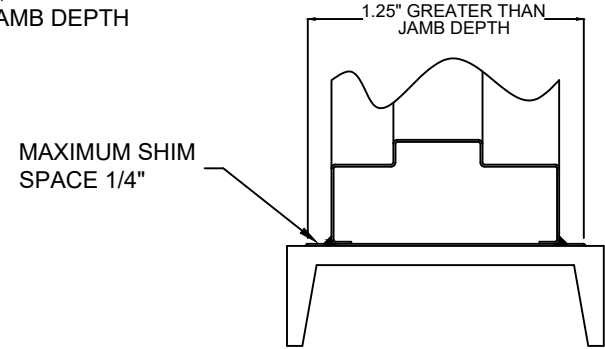

MASONRY WIRE ANCHOR 0.165" DIA. MIN.

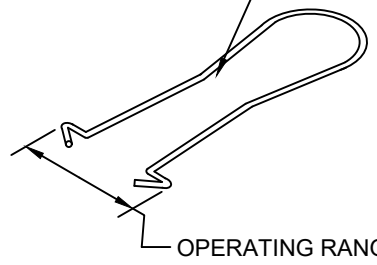

MAXIMUM SHIM THICKNESS 0.25 CMU BLOCK AND THROAT OF FRAME FILLED WITH 3000 PSI MORTAR

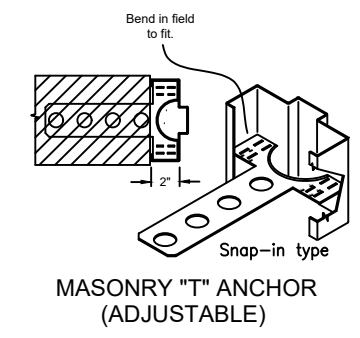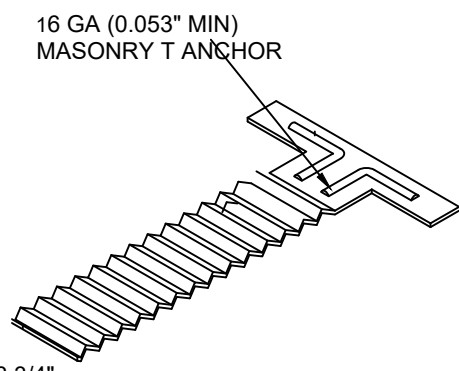

Expansion Shell Anchor Requirements for Jamb of Paired Frames

Up to an including 70 psf

Opening Height (inches)	Max. Distance From End of Jamb	Min. Anchor Quantity	Maximum Spacing (inches)
Up to 88"	12	4	19
90"	12	4	19
92"-96"	12	4	19

Expansion Shell Anchor Requirements for Heads of Paired Frames

70 psf 2 anchors in the head @ 4 1/2" O.C

Masonry Strap, Masonry T, and Masonry Wire Anchor Requirements for Jamb of Paired Frames

Up to an including 70 psf

Opening Height (inches)	Max. Distance From End of Jamb	Min. Anchor Quantity	Maximum Spacing (inches)
Up to 88"	12	4	24
90"	12	4	24
92"-96"	12	4	24

Expansion Shell Anchor Requirements for Heads of Paired Frames

70 psf 2 anchors in the head @ 4 1/2" O.C

c:\users\ariel\engineering\express\production - documents\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg


10/18/2023 6:42 PM ARTIEL

CECO DOOR GLAZED PAIRS OF DOORS


PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885


FL




FL# 16355.3

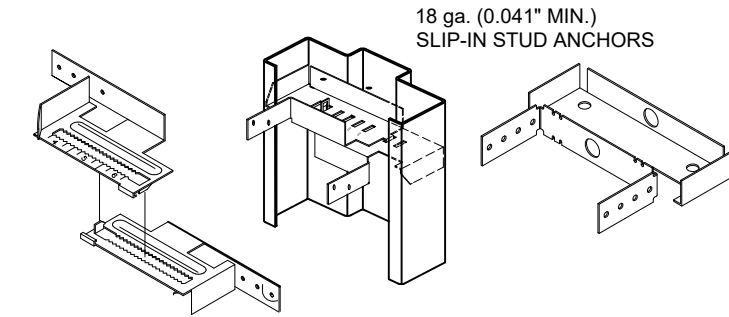


18 ga. (0.041" MIN.)
SLIP-IN STUD ANCHORS

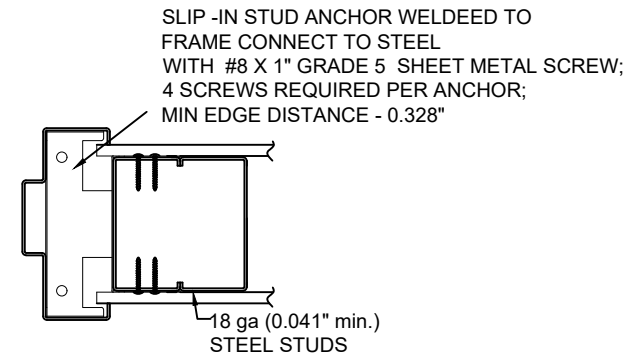

SLIP-IN STUD ANCHOR WELDEED TO
FRAME CONNECT TO STEEL
WITH #8 X 1" GRADE 5 SHEET METAL SCREW;
4 SCREWS REQUIRED PER ANCHOR;
MIN EDGE DISTANCE - 0.328"

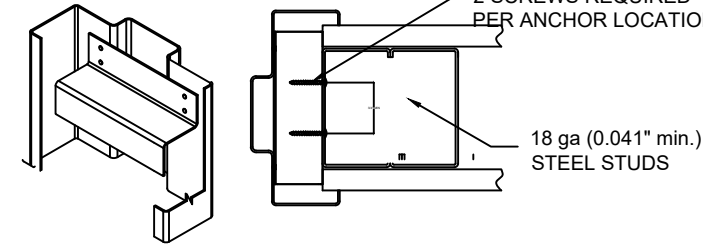

#14 x 1" GRADE 5 SHEET METAL SCREW;
2 SCREWS REQUIRED
PER ANCHOR LOCATION;

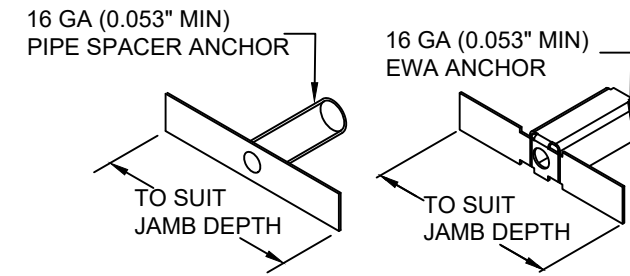


16 GA (0.053" MIN)
PIPE SPACER ANCHOR


16 GA (0.053" MIN)
EWA ANCHOR

TO SUIT
JAMB DEPTH


TO SUIT
JAMB DEPTH

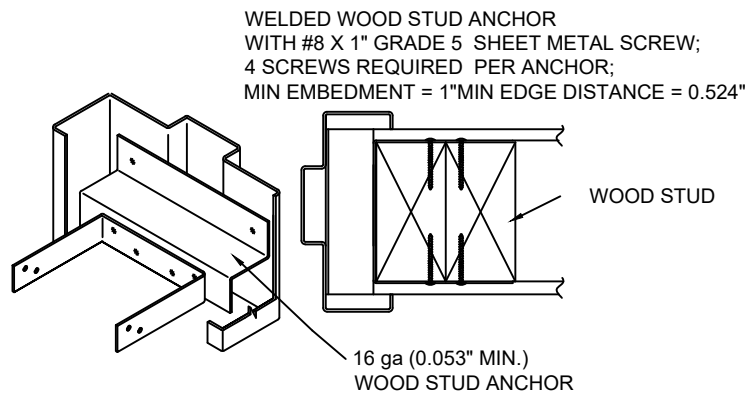

WELDED WOOD STUD ANCHOR
WITH #8 X 1" GRADE 5 SHEET METAL SCREW;
4 SCREWS REQUIRED PER ANCHOR;
MIN EMBEDMENT = 1" MIN EDGE DISTANCE = 0.524"

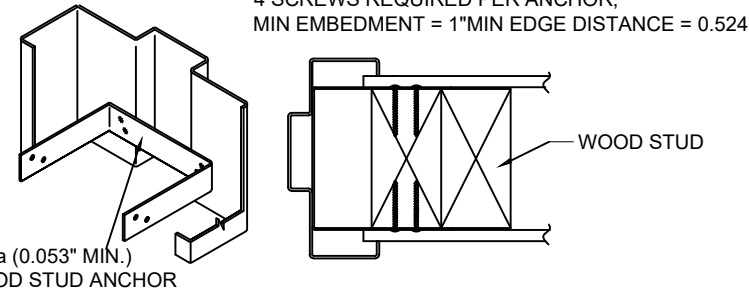

WELED WOOD STUD ANCHOR
WITH #8 X 1" GRADE 5 SHEET METAL SCREW;
4 SCREWS REQUIRED PER ANCHOR;
MIN EMBEDMENT = 1" MIN EDGE DISTANCE = 0.524

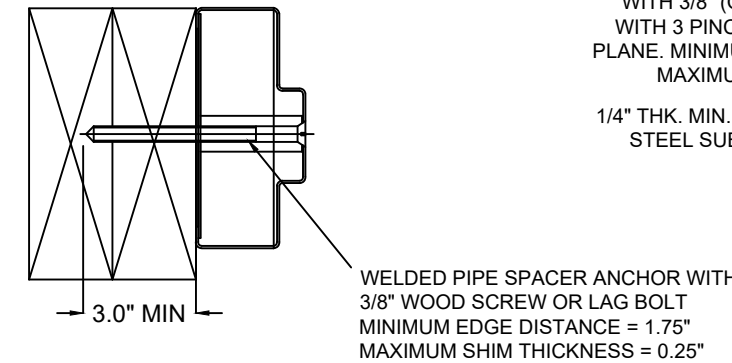

WELDED PIPE SPACER ANCHOR WITH
3/8" WOOD SCREW OR LAG BOLT
MINIMUM EDGE DISTANCE = 1.75"
MAXIMUM SHIM THICKNESS = 0.25"

WELDED PIPE SPACER ANCHOR OR EWA
WITH 3/8" (GRADE 2 MIN.) TAP-IN BOLT
WITH 3 PINCHES PASSED THE THREAD
PLANE. MINIMUM EDGE DISTANCE = 1.75"
MAXIMUM SHIM THICKNESS = 0.25"

1/4" THK. MIN. A36 MIN.
STEEL SUBSTRATE

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23


COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

11 OF 14


Stud Anchor Requirements for Paired Frame Jambs			
Up to an including 70 psf			
Opening Height (inches)	Max. Distance From End of Jamb	Min. Anchor Quantity	Maximum Spacing (inches)
Up to 88"	12	4	21
90"	12	5	21
92"-96"	12	5	21
Stud Anchor Requirements for Heads of Paired Frames			
70 psf	4 anchors in the head @ 3" O.C		
Note: Stud Anchors May not be Used Above 70 psf.			

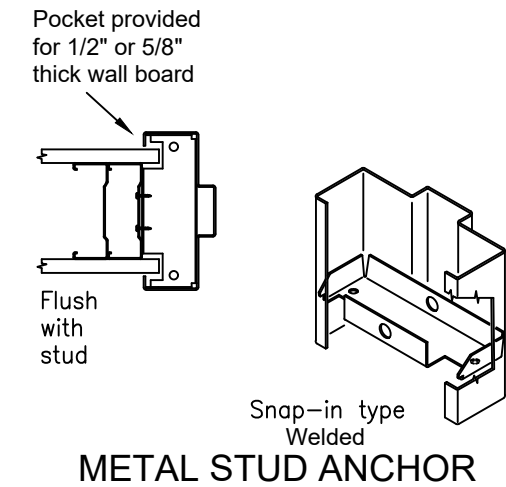

Pocket provided for 1/2" or 5/8" thick wall board

Flush with stud

Snap-in type
Welded
METAL STUD ANCHOR

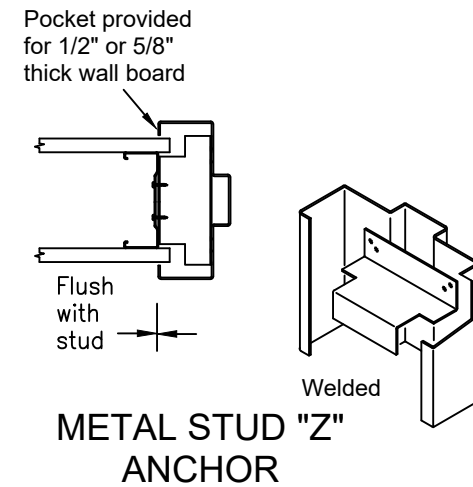

Pocket provided for 1/2" or 5/8" thick wall board

Flush with stud

Welded
METAL STUD "Z"
ANCHOR

c:\users\ariel\engineering\express\production - documents\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg


10/18/2023 6:42 PM ARTIEL

CECO DOOR GLAZED PAIRS OF DOORS






PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



PEMKO WEATHERSTRIP USED ON CECO DOORS AND FRAMES WHERE WATER INFILTRATION IS NOT REQUIRED.

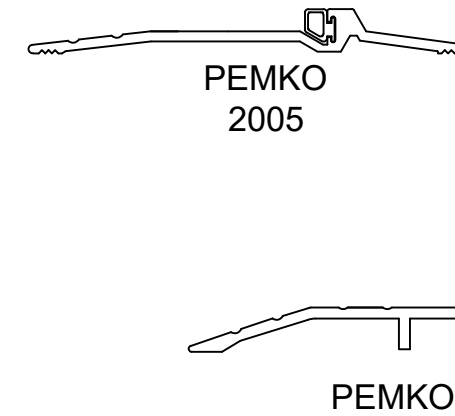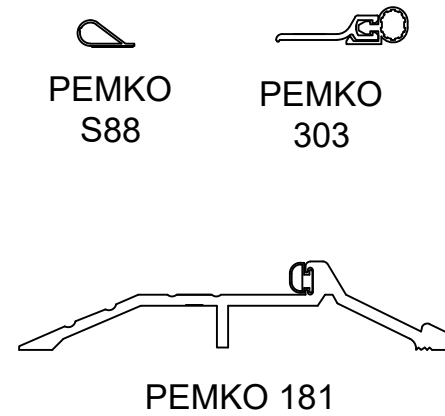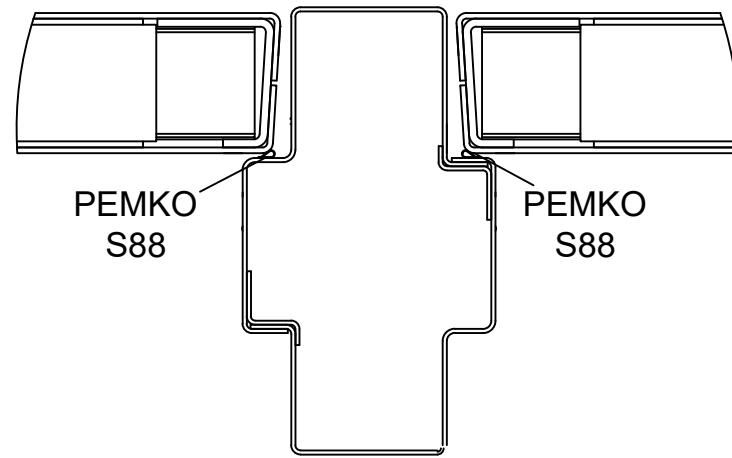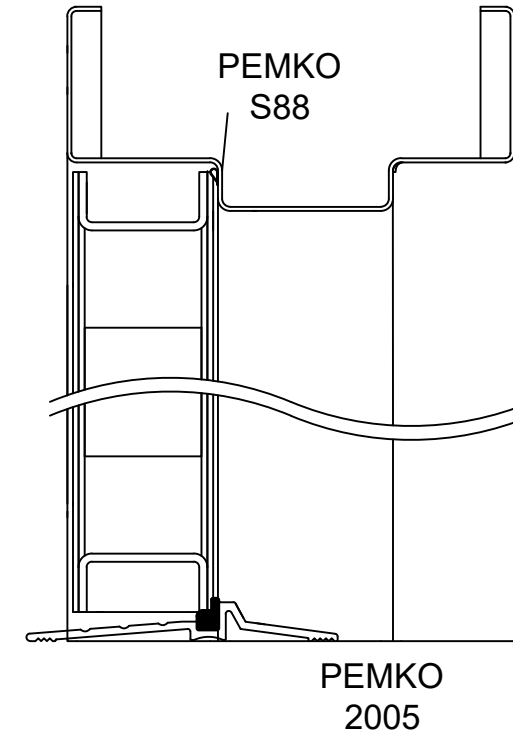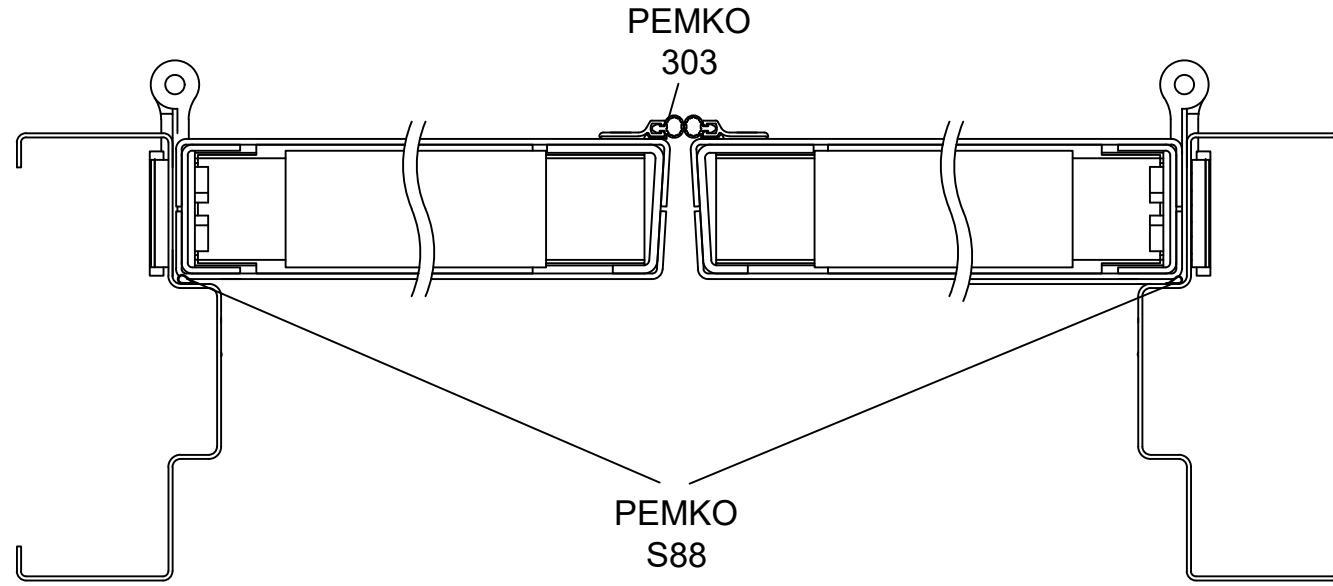

FL# 16355.3

ENGINEERING EXPRESS
 POSTAL ADDRESS:
 2234 NORTH FEDERAL HWY #7664
 BOCA RATON, FL 33431
 ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
 DIVISION OF ASSA ABLOY DOOR GROUP, INC.
 9159 TELECOM DRIVE
 MILAN, TN 38358
ASSA ABLOY
 COMMERCIAL STEEL EXTERIOR DOORS
 GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
 FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®
 23-68038c
 SCALE: NTS UNLESS NOTED
 12 OF 14

c:\users\ariel\engineering\express\production - documentos\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg


CECO DOOR GLAZED PAIRS OF DOORS

PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 50 FEET PER SECOND OR 350 FT-LBS. MISSILE LEVEL D) PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.

PEMKO WEATHERSTRIP USED ON CECO DOORS AND FRAMES WHERE WATER INFILTRATION IS REQUIRED.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



FL# 16355.3


ENGINEERING EXPRESS
 POSTAL ADDRESS:
 2234 NORTH FEDERAL HWY #7664
 BOCA RATON, FL 33431
 ENGINEERINGEXPRESS.COM

CECO DOOR PRODUCTS
 DIVISION OF ASSA ABLOY DOOR GROUP, INC.
 9159 TELECOM DRIVE
 MILAN, TN 38358
 COMMERCIAL STEEL EXTERIOR DOORS
 GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
 FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®
 23-68038c
 SCALE: NTS UNLESS NOTED
 13 OF 14

c:\users\ariel\engineering\express\production - documents\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg

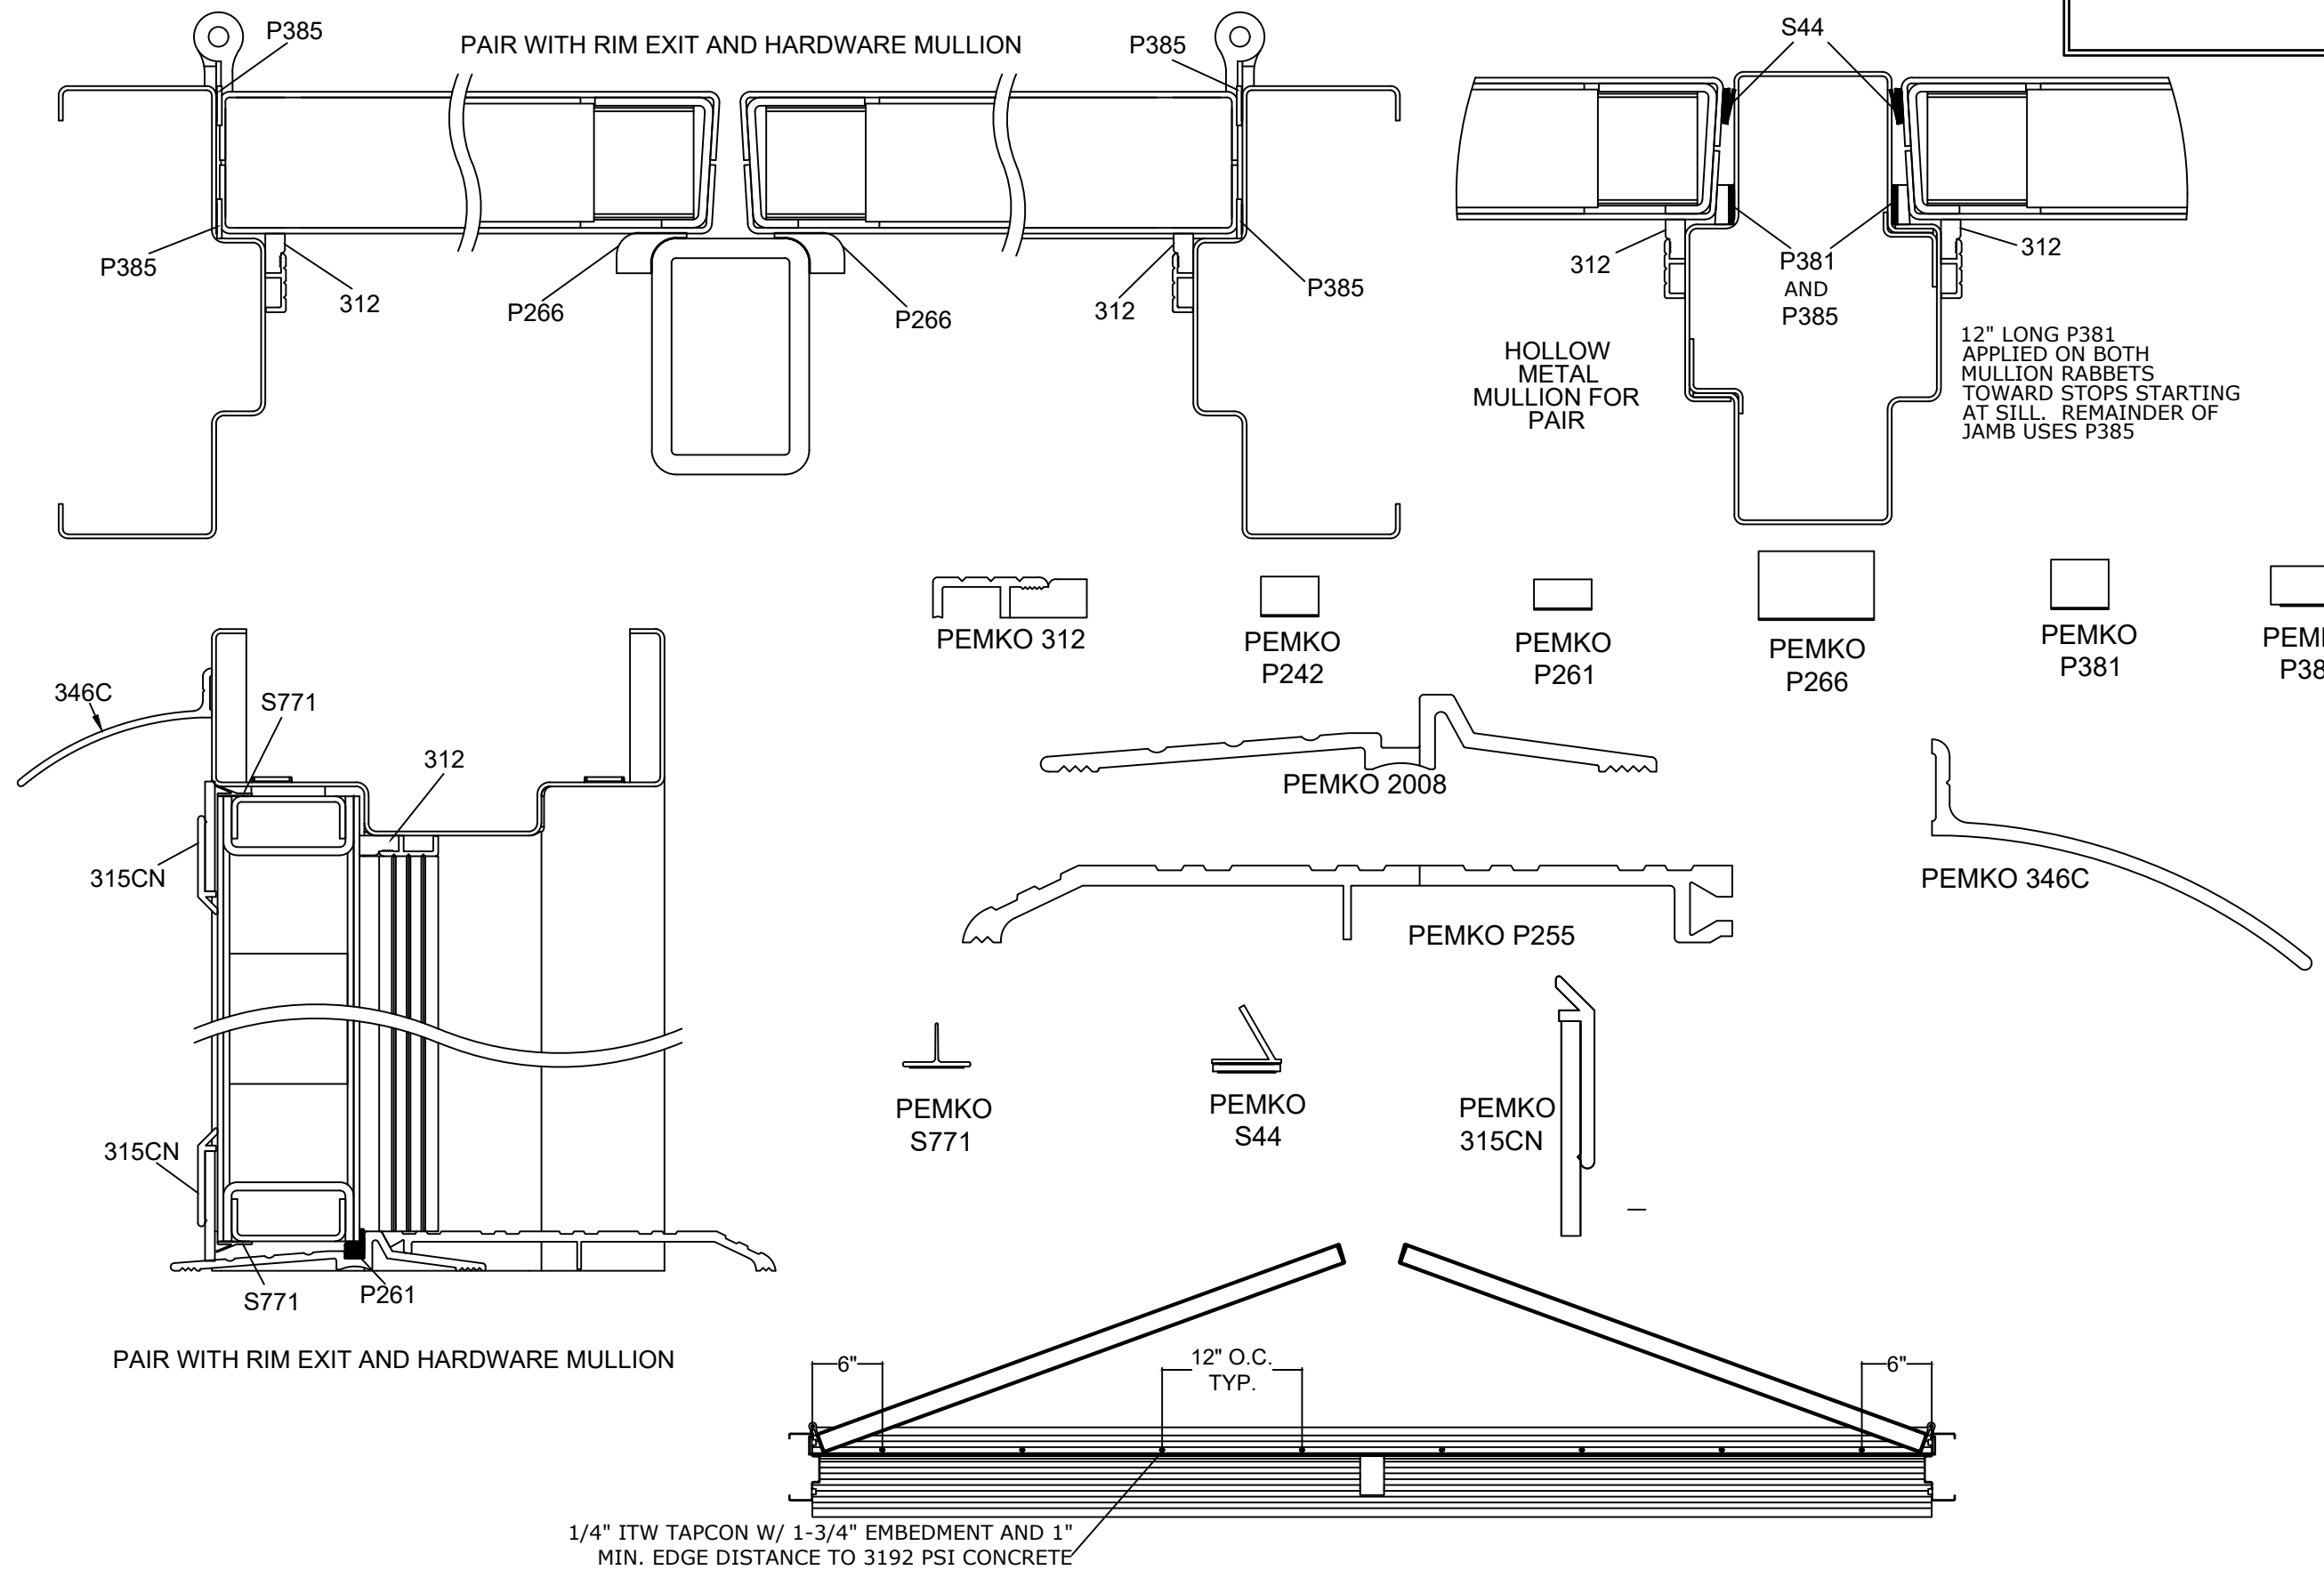

1/4" ITW TAPCON W/ 1-3/4" EMBEDMENT AND 1" MIN. EDGE DISTANCE TO 3192 PSI CONCRETE

HARDWARE NOTES

Corbin Russwin

The ED5200(S)A / ED4200(S)A x M107 Rim Exit and the ED5470(B) x M107 Surface Vertical Rod maybe suffixed by MER. May use M94 with any combination of the M61, M92, M93, or M1 suffixes.

The ED5200(S)A x M107 Rim Exit and the ED5470(B) x M107 Surface Vertical Rod may include 900 series trims 9600, 9700, 9800 Series Access Control Trims or the 9900 Series Electrified Trims.

The MP9800 (A/B) x M107 Series Concealed Multi-Point Lock may include the options: M91, M92, M93, 903, 904, Access 600, IN, INB, SE.

Use FE707A, FE708A, WS707AKM, or WS708AKM Hardware Mullion with the ED5200(S)A / ED4200(S)A x M107 Rim Exit

On pairs of doors, one leaf of the pair utilizing with the ED5470(B) x M107 Surface Vertical Rod or MP9800 (A/B) x M107 Series Concealed Multi-Point Lock may be replaced with two 988CR surface bolts. The local building official must approve this configuration of hardware for use in a means of egress.

The ML2000 Series Mortise Locks, Series CL3300 Series Cylindrical Locks, ED5200(S)A x M107 Rim Exit, and ED5470(B) x M107 Surface Vertical Rod may be prefixed IN-IP, IN-IPS, IN-CP, IN-IP-MB, IN-IP-MW, IN-IPS-MB, IN-IPS-MW, IN-CP-MP, and IN-CP-MW.

The ML2000 Series Mortise Locks, Series CL3300 Series Cylindrical Locks, ED5200(S)A x M107 Rim Exit may be prefixed PIP1-IPSKM, PWI1-IPSKM, PIP1-CPKM, PWI1-CPKM, PIP1-IPSM, PWI1-IPSM, PIP1-CPM, and PWI1-CPM.

May also use the ML20100 and ML20200 mortise locks.

The SELP10 and IN 120 Access Control may be used with CL3300 Cylindrical Lock or ML2000 Mortise Lock.

HES

The 1006 Series Electric Strike maybe used on 4'0" x 8'0" and smaller single or 8'0" x 8'0" and smaller pairs out swinging doors of 70 psf or less.

The 9600 Series Electric Strike may be used with the Sargent HC8800 Series Rim Exit at design pressures of 70 psf or less.

The 9700 Series Electric Strike may be used with the Corbin Russwin ED5200(S)A and the Yale 7150(F)WS / 7250M(F)WS Rim Exits at design pressures of 70 psf or less.

Securitron 1500 / 1500E Strike may be used on 3'0" x 7'0" and smaller single out swinging assemblies with mortise locks and latch bolt only at design pressures of 60 psf or less.

Securitron 1600 / 1600E Strike may be used on 4'0" x 8'0" and smaller single out swinging assemblies with mortise locks with latch bolt and dead bolt of 70 psf and less.

Sargent

The HC8800 Series Rim Exit, WS 8800 Series Rim Exit, and WS-8900 Series Mortise Exit maybe prefixed 53, 55, 55-56, 56, 57, 58, AWE, B, BT, ET, H1, H2, KP, LK, LU, M1, N1, N2, PA, PK, PG, P1, P2, IPSKM, CPKM, IPSM, CPM, IM, IKM, PRX, S1, S2, S3, IA, IK, IN, TK, TL, TP and TU.

Use HC980, 12-HC980, HCL980, 12-HCL980 Hardware Mullion with the HC8800 Series Rim Exit.

Series HT-56- can be used same as the 53-56- on the 80 Series devices. Exceptions include the following prefixes either used alone or in combination: 53-, 55-, 57-, 58-, 59- and AL.

All 80 Series employing HiO technology and the 55 option are designated HT-55-.

The MD8600 Series Concealed Vertical Rod Exit and 7000 Series Concealed Multi-point Lock may be prefixed 53, 55, 56, 57, 58, 59, BT, ET, H1, H2 and TL.

On pairs of doors, one leaf of the pair utilizing with the MD8600 Series Concealed Vertical Rod Exit, 7000 Concealed Multi-Point Lock or HC4-8700 / HC-8700 Surface Vertical Rod may be replaced with two 988CR surface bolts. The local building official must approve this configuration of hardware for use in a means of egress.

The 10 Line / 10G77 Cylindrical Locks and 8200 / R8200 mortise Locks may be prefixed AWE, B, PG, P1, P2, IPSKM, CPKM, IPSM, CPM, IM, IKM, PRX, IA, IK, IN, KP, LK, LU, PA, PK, H1, H2, N1, N2, S1, S2, S3, TK, TL, TP and TU.

Yale

7150(F)WS / 7250M(F)WS Rim Exit and 7170(F)WS Surface Vertical Rod may be suffixed with any combination of A, B, O, or S. These devices may be prefixed by Sym and can include 500F or 600F Series Trims.

Use M200FWS or KRM200FWS Mullion with the 7150(F)WS / 7250M(F)WS Rim Exit.

On pairs of doors, one leaf of the pair utilizing with the 7170(F)WS Surface Vertical Rod may be replaced with two 988CR surface bolts. The local building official must approve this configuration of hardware for use in a means of egress

nexTouch Access Control may be used on single 3'0" x 7'0" assemblies with 4700LN cylindrical lock at design pressures of 60 psf or less .

Securitron

The MUNL may be used on 60 psf rated single 3'0" x 7'0" assemblies with a mortise Corbin Russwin ML2000, Sargent 7800/8200/R8200, or Yale 8800 mortise lock. The UNL may be used on 60 psf rated single 3'0" x 7'0" assemblies with a Corbin Russwin CL3100 / CL3300 / CL3500 / CL3800, Sargent 6500 / 7 /10, or Yale 5300 / 5300LN / 5400 / 5400LN Cylindrical Locks.

The ICPT Wireless Inductive Power Transfer may be used.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

FL



FL# 16355.3

ENGINEERING EXPRESS
POSTAL ADDRESS:
2234 NORTH FEDERAL HWY #7664
BOCA RATON, FL 33431
ENGINEERINGEXPRESS.COM

Ceco Door Products
DIVISION OF ASSA ABLOY DOOR GROUP, INC.
9159 TELECOM DRIVE
MILAN, TN 38358
ASSA ABLOY
COMMERCIAL STEEL EXTERIOR DOORS
GLAZED PAIRS OF DOORS (LMI) - FBC (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#16355.3)

REMARKS	DRWN	CHKD	DATE
INIT ISSUE (12-CUI-03g-01)	KL	FLB	06/28/13
FBC UPDATE	RWN	CSL	06/12/15
2017 FBC UPDATE	JEM	FLB	10/03/17
2020 FBC UPDATE	TAE	FLB	12/17/20
2023 FBC (PREV 20-34878)	AMZ	RS	10/18/23

COPYRIGHT ENGINEERING EXPRESS®

23-68038c

SCALE: NTS UNLESS NOTED

14 OF 14

c:\users\ariel\engineering\express\production - documentos\projects\23-68038 multiple products 2023 fbc update fl16355\work\drawings & cad\23-68038c - fl16355.3 - dwg 3.dwg 10/18/2023 6:42 PM ARTIEL