


TYPICAL ELEVATION WITH FASTENER SPACING

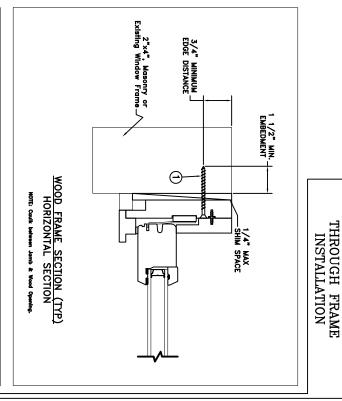

74		
4 3/4	Max	
×		
35	Frame	
7,	1e	
/32		
+50,	D	
/-50)P	
NO	IMPACT	

Installed Fastener Schedule:

- 2 pre-drilled holes in the head and side jambs of the window. All windows: install corrosion resistant #8 fasteners no more than 4" from each corner and 16" o.c. through
- Fasteners must be long enough to penetrate at least 1-1/2" into framing members.

General Notes:

- Florida building code. The product shown herein is designed and manufactured to comply with the current edition of the
- Buck, framing and masonry by others and is responsibility of architect or engineer of record All glazing shall conform to ASTM E1300.

ωΝ

SitalineW/DDKTDTran Cert	<u>2</u>			פאסטף מס ממווסו ובסמ טן סבבט זייבוייוויס.
CAD DWG. No.: REV: A SHEET		PLANT NAME AND LOCATION:	IDENTIFIER No.	excent as authorized by TELD-IMEN Inc
			D015190	This drawing and its contents are confidential and are not to be
			PART/PROJECT No.:	DISCLAIMER:
			D.STOKES	unit or go to www.jeld-wen.com.
Siteline Wood Pocket DH Transom	Siteline woo		APPROVED BY:	complete installation procedure, see the instructions packaged with the
o L Donald De Hamana			R.HAMILTON	consideration that may arise in different wall conditions. For the
		TITLE:	CHECKED BY:	applicable) up to the size littlications not address the section
PHONE: (800) 535-3936	Ç	NTS	J.HAWKINS	to achieve the rated design pressure and impact performance (where
A VENIA ID LAFTO OK, A OUT		SCALE:	DRAWN BY	This schedule addresses only the fasteners required to anchor the unit
I AMATH EALLS OF 07601	IJ	05/17/2018		
3737 LAKEPORT BLVD.		DATE:	PROJECT ENGINEER:	

SitelineWDPKTDTran Cerl