



JAMB SCREW INSTALLATION

UNIT	MAX FRAME SIZE	DP RATING
UL DBLHNG P/ POLY G2	71 3/8 X 85 3/16	+50/-50

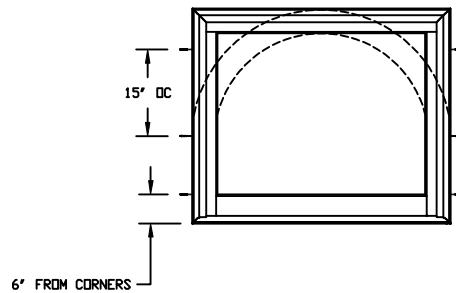

GLASS COMPLIES WITH ASTM E1300
GLAZING DETAIL

JAMB SCREW INSTALLATION METHOD

- UNIT MUST NOT BE IN DIRECT CONTACT WITH EITHER CONCRETE OR TREATED BUCK MATERIAL. IF SHIM SPACE IS LESS THAN 1/8\"/>
- ROUND TOP UNIT INSTALLATION INCLUDES #8 X 3\"/>
- SCREWS MUST HAVE A MINIMUM OF 1.250\"/>

- NOTES:**
1. THIS PRINT IS FOR STRUCTURAL PERFORMANCE ONLY. FOR FLASHING & SEALING REQUIREMENTS, REFER TO THE INSTALLATION INSTRUCTIONS.
 2. SHIMS:
 - A SHIM MUST BE PLACED AT THE CHECK RAILS AND 4-6\"/>
 3. IF CHEMICALLY TREATED LUMBER IS USED FOR BUCK MATERIAL, FASTENERS INTO THE BUCK MUST BE A MINIMUM OF 0.90 OZ/FT² ZINC HOT DIPPED GALVANIZED OR STAINLESS STEEL TYPE 304 OR 316.
 4. RECTANGULAR UNIT SHOWN, SHAPED UNITS ALSO APPLY.

CATEGORY:
DOUBLE HUNG
UNIT TYPE:
UDHPG2

3	-----	2X WOOD BUCK BY OTHERS
2	-----	SHIM
1	-----	#8 X 3.000 WOOD SCREW
ITEM NO	REF NO	DESCRIPTION

UNSPECIFIED TOLERANCES

DECIMALS:	ANGLE DEG:
XX ± .03	± .5
XXX ± .012	
LINEAL:	FAB LINEAL:
+ .125	± NA
- .000	

MATERIAL:

NA

MARVIN RESEARCH & DEVELOPMENT

COLLECTION: ULTIMATE

DWG TYPE: INSTALLATION
DESCRIPTION: INSTALLATION

CHK: SIZE: B CLASS: MISC DWG NO: 00094463

APP: SCALE: NA DATE: 02/03/15 DWG BY: BORNEMAN, SKIP SHEET: 1 OF 1

NOTICE - CONFIDENTIAL INFORMATION

The information in this document is privileged and strictly confidential. The information contained herein shall be used only by Marvin Windows and Doors employees and by those agents or suppliers granted official written permission. If the reader of this document is not the intended recipient, or the employee or agent of the intended recipient, please delete this document from all data storage devices, and destroy all hard copies. Any unauthorized dissemination, distribution, copying or other use of the information contained in this document is strictly prohibited.