

PECORA 896 SILICONE PANEL  
ADHESIVE APPLIED ALONG  
THE FULL LENGTH OF EACH  
HAT CHANNEL FLANGE IN 1/2"  
THICK LINES

OMEGA-LITE PANEL


18 GA. 7/8" HAT CHANNELS  
INSTALLED AT 16" O.C. & AT  
ALL PANEL JOINTS. WHEN  
ORIENTED HORIZONTALLY,  
PROVIDE 2" MIN. GAPS AT  
EACH END AT INTERFACES w/  
VERTICAL HAT CHANNELS  
FOR VENTING

18 GA. HAT CHANNELS  
INSTALLED AT 16" O.C.  
COORDINATE DEPTH REQ w/  
SYSTEM SPECIFIC HAT  
CHANNEL DEPTH. (R&R = 7/8";  
DS = 1-1/2"). NOT REQ FOR  
1-PC & C&C.

MECHANICALLY FASTEN w/  
#12 SCREW FASTENERS @  
6" O.C.

CMU or CONCRETE SUBSTRATE  
w/ HENRY AIR-BLOCK 31MR FLUID-APPLIED  
AIR AND WATER BARRIER

MECHANICALLY FASTEN w/  
(2) 3/16" DIAMETER HILTI  
KWIK-CON II+ CONCRETE  
ANCHORS @ 18" O.C. w/ 1-3/4"  
EMBEDMENT

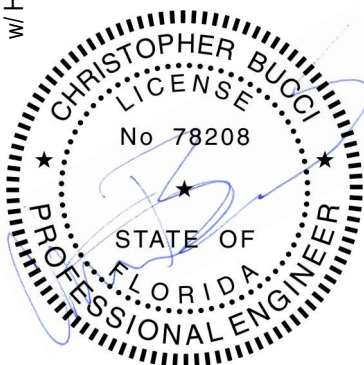

SECTION VIEW

Rev\_0 : 03/10/2015

OMEGA-LITE® ACM WALL PANELS

CMU & CONCRETE SUBSTRATE FURRING REQ FOR  
INSTALLATION OF 1-PC, TF; C&C; R&R; AND DRY SEAL

NOTE: SEE LAMINATORS INSTALLATION GUIDELINES  
FOR MORE INFORMATION ON ATTACHMENT PROCEDURES

Date: 03/10/2015	Drawn By: CB	Dwg. No. LAM-CMU-001	Page 1 OF 1
---------------------	-----------------	-------------------------	----------------



www.LaminatorsInc.com

877.OMEGA.77