	REVISIONS											
REV	DESCRIPTION	DATE	APPROVED									
В	CHANGE MANUFACTURER'S NAME	04/06/2023	R.L.									

NOTES:


- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING THE HVHZ.
- 2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 3. SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/2".
- 4. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
- 5. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
- 6. FRAME MATERIAL: EXTRUDED ALUMINUM 6063-T6.
- 7. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 9 FOR GLASS DETAILS.
- 8. APPROVED IMPACT PROTECTIVE SYSTEM <u>IS NOT REQUIRED</u> FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS WHEN INSTALLED AT 30FT OR HIGHER ABOVE GROUND LEVEL.
- 9. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE 1/2" LAG SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 2" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 10. FOR ANCHORING INTO GROUT FILLED MASONRY OR CONCRETE USE 1/2" WEDGE BOLTS WITH SUFFICIENT LENGTH TO ACHIEVE A 3 1/2" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 6" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 11. FOR ANCHORING INTO METAL STRUCTURE USE 1/2-13 SMS WITH LOCKWASHER AND NUT. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 12. ALL FASTENERS TO BE CORROSION RESISTANT.
- 13. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
- A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
- B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
- C. MASONRY: GROUT FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
- D. METAL STRUCTURE: STEEL 1/4" THICK MINIMUM FY=33KSI/FU=52KSI

SIGNED: 04/06/2023

Luis R. Lomas P.E. FL No.: 62514

	TABLE OF CONTENTS	_		950 SOLON AHACHIE, T	RD.			
SHEET NO.	DESCRIPTION		STORM WALL XL HURRICANE RESISTANT CURTAIN WALL — DRY GLAZED — LMI HVHZ					
1	NOTES	NOTES EMILITATION						
2 - 4	ELEVATIONS AND RATING CHARTS	DRAWN:		DWG NO.		REV		
5 - 8	CROSS SECTIONS	R.L.		08-03022 B				
9	GLAZING DETAILS	SCALE NTS	DATE 1	2/07/16	SHEET 1 OF 23			
10 - 20	INSTALLATION DETAILS	L. ROBERTO LOMAS P.E. 400 S. PALM AVE. INDIALANTIC, FL 32903						
21 – 23	COMPONENTS		434-68	,	Pirlomaspe.com			

US ALUMINUM

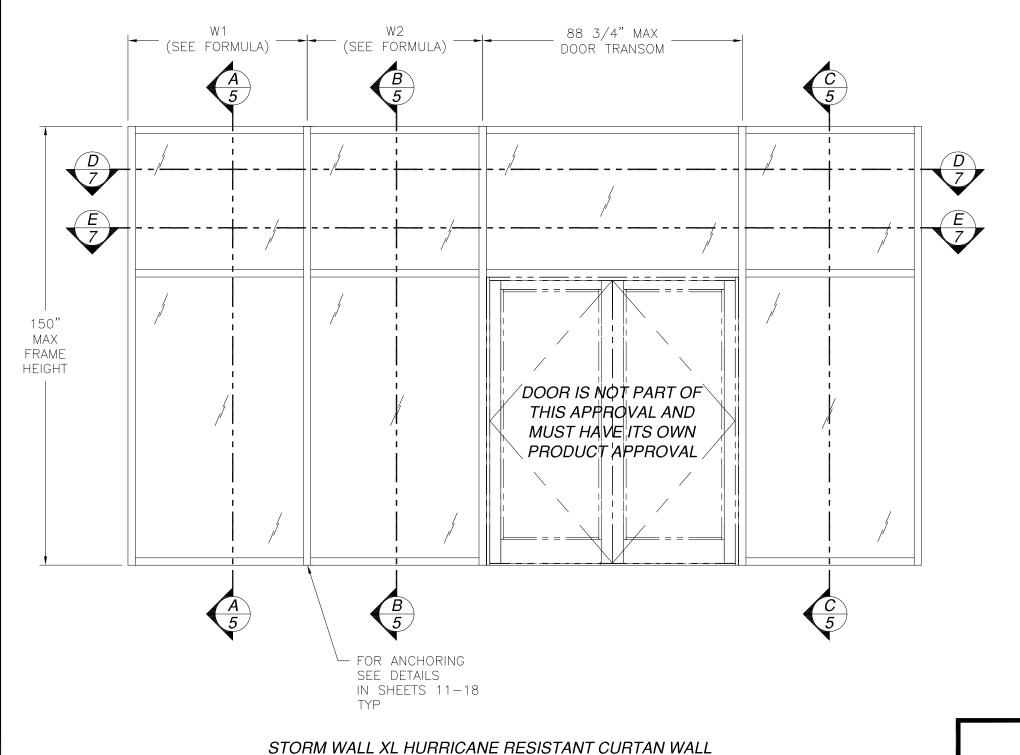

SINGLE SPAN

EXTERIOR VIEW

UNLIMITED NUMBER OF PANELS IS ALLOWED AS LONG AS INDIVIDUAL PANELS

AREA DO NOT EXCEED 52.25 FT²

AND USE VERTICAL CONDITIONS AS SHOWN

REVISIONS REV DESCRIPTION APPROVED CHANGE MANUFACTURER'S NAME 04/06/2023 R.L.

PROCEDURE TO DETERMINE RATING:

- DETERMINE TRIBUTARY WIDTH PER FORMULA BELOW
- SELECT JAMB AND MULLION PROFILES TO BE USED FROM SHEET 7.
- REFER TO CHARTS IN SHEET 4 TO DETERMINE RATINGS FOR JAMB AND MULLION SELECTED IN STEP 2.
- DETERMINE THE TYPE OF ANCHOR CLIP AND SUBSTRATE WHERE PRODUCT IS TO BE INSTALLED. SEE SHEETS 10 - 17
- 5. REFER TO CHARTS IN SHEETS 18 AND 19 TO DETERMINE RATING OF ANCHORING SELECTED IN STEP 4.
- SELECT GLASS TO BE USED, REFER TO SHEET 9
- REFER TO CHART #5 IN SHEET 9 TO DETERMINE RATING OF GLASS SELECTED IN STEP 6.
- THE MINIMUM OF ALL RATINGS WILL DETERMINE THE RATING OF THE TOTAL PRODUCT.

TRIBUTARY WIDTH = $\frac{W1 + W2}{2}$

SIGNED: 04/06/2023

US ALUMINUM 950 SOLON RD. WAXAHACHIE, TX 75165

STORM WALL XL HURRICANE RESISTANT CURTAIN WALL - DRY GLAZED - LMI HVHZ SINGLE SPAN ELEVATION

DRAWN: DWG NO. R.L. 08-03022 SHEET 2 SCALE NTS DATE 12/07/16 OF 23 L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com

TREV STA.

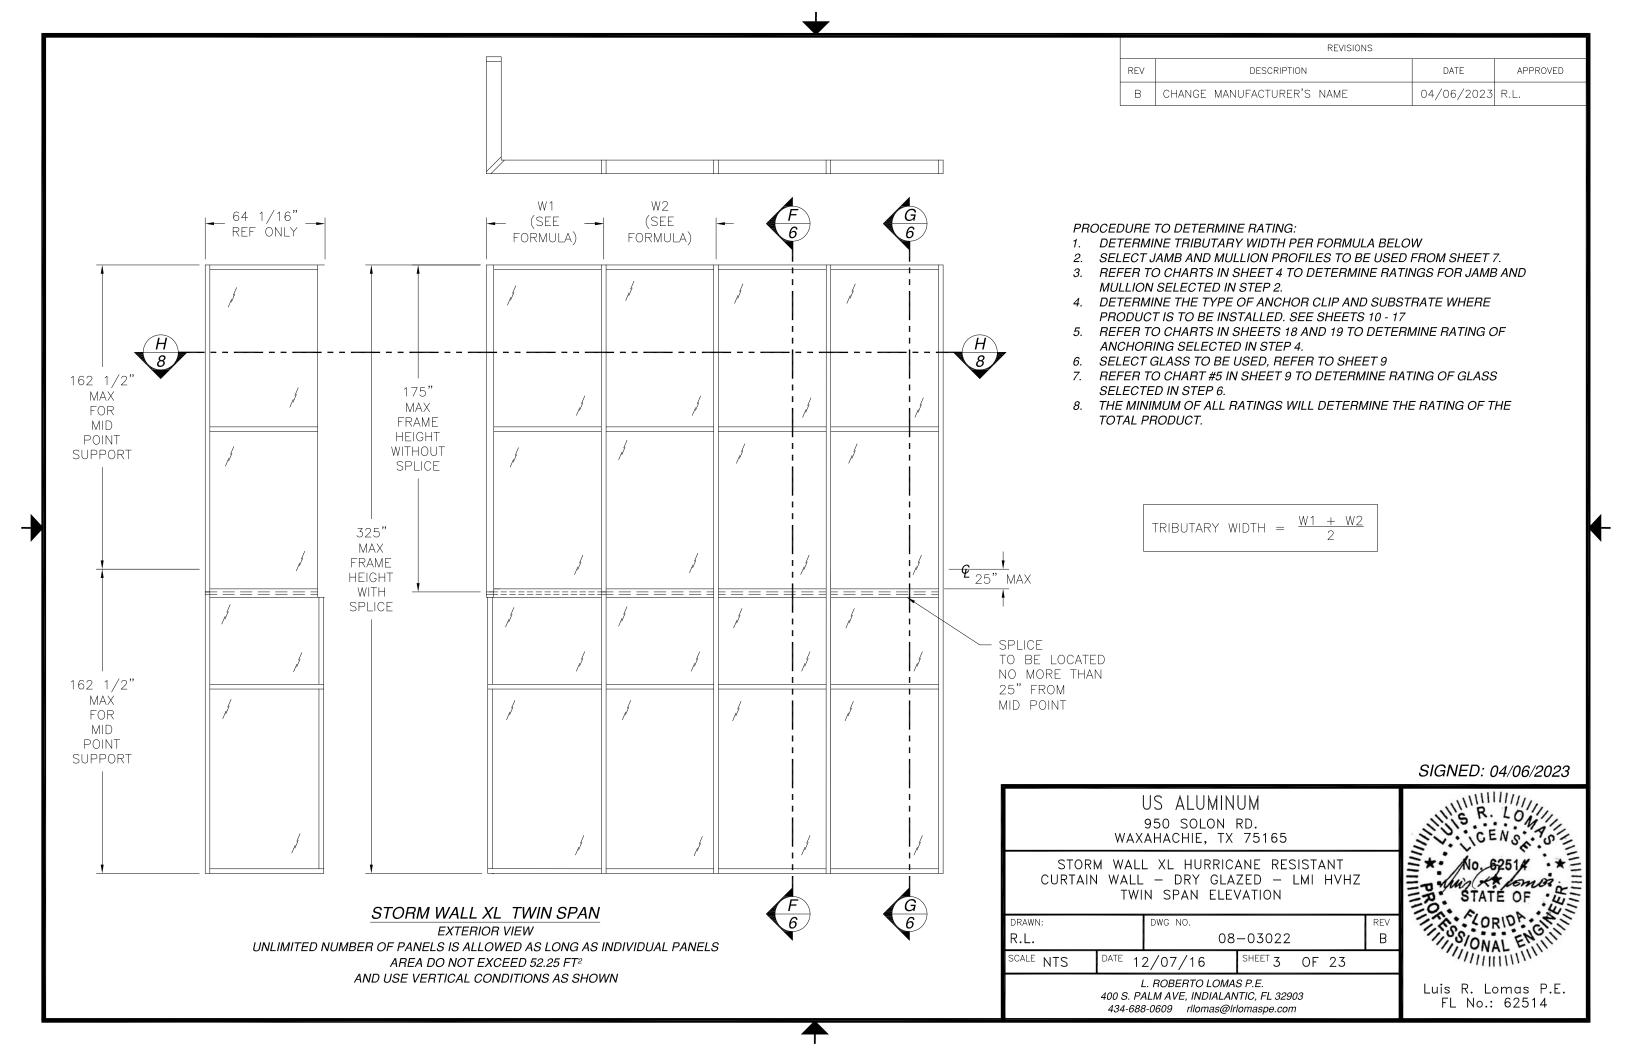


Chart #1 Design pressure for Mullion "A", "B" and "C" (psf) Design pressure for Jamb "B" and "C" (psf)

Frame			Design p	ressures	are posi	tive and	negative		
Height				Tribu	tary Wid	th (in)			
(in)	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0
60.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
66.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
72.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
78.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
84.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
90.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
96.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
102.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
108.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
114.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
120.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
126.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	69.4
132.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	66.3
138.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	69.2	63.4
144.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	66.3	60.8
150.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	63.6	58.3
		I	ARGE M	ISSILE II	MPACT A	ND HVHZ	7		

Design pressure for Mullion "D" (psf)
Design pressure for Jamb "A" (psf)

Chart #2

Frame	, ,													
Height	Tributary Width (in)													
(in)	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0					
60.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0					
66.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0					
72.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	60.2					
78.0	65.0	65.0	65.0	65.0	65.0	65.0	65.0	60.6	55.6					
84.0	65.0	65.0	65.0	65.0	65.0	65.0	61.9	56.3	51.6					
90.0	65.0	65.0	65.0	65.0	65.0	64.2	57.8	52.5	48.2					
96.0	65.0	65.0	65.0	65.0	65.0	60.2	54.2	49.3	45.1					
102.0	65.0	65.0	65.0	65.0	63.7	56.7	51.0	46.4	42.5					
108.0	65.0	65.0	65.0	65.0	57.4	51.1	46.0	41.8	38.3					
114.0	65.0	65.0	65.0	55.8	48.8	43.4	39.1	35.5	32.6					
120.0	65.0 65.0 55.8		55.8	47.9	41.9	37.2	33.5	30.5	27.9					

LARGE MISSILE IM PACT AND HVHZ

Chart #3

Design pressure for Mullion "A", "B" and "G" (psf)

Design pressure for Jamb "C" and Corner (psf)

Frame			Design p	ressures	are posi	tive and	negative		
Height				Tribu	tary Widi	th (in)			
(in)	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0
60.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
66.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
72.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
78.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
84.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
90.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
96.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
102.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
108.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
114.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
120.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
126.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	69.4
132.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	66.3
138.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	69.2	63.4
144.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	66.3	60.8
150.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	63.6	58.3
156.0	70.0	70.0	70.0	70.0	70.0	69.1	62.2	56.6	51.9
162.0	70.0	70.0	70.0	70.0	69.5	61.7	55.6	50.5	46.3
168.0	70.0	70.0	70.0	70.0	62.3	55.4	49.8	45.3	41.5
174.0	70.0	70.0	70.0	64.1	56.1	49.8	44.8	40.8	37.4
175.0	70.0	70.0	70.0	63.0	55.1	49.0	44.1	40.1	36.7

LARGE MISSILE IM PACT AND HVHZ FULL LENGTH WITHOUT SPLICE

Chart #4

Design pressure for Mullion "A", "B" and "G" with splice (psf)

Design pressure for Jamb "C" and Corner with splice (psf)

Frame	, ,										
Height				Tribu	tary Widt	th (in)					
(in)	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0		
210.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
216.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
222.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
228.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
234.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
240.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
246.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
252.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
258.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
264.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
270.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0		
276.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	68.7		
282.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	67.2		
288.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	65.8		
294.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	64.5		
300.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	68.9	63.2		
306.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	67.6	62.0		
312.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	66.3	60.8		
318.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	65.0	59.6		
324.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	63.8	58.5		
325.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	63.6	58.3		

LARGE MISSILE IMPACT AND HVHZ
FULL LENGTH WITH SUPPORT AT MIDDLE POINT AND SPLICE

DISTANCE BETWEEN SPLICE AND MID POINT MUST NOT EXCEED 25"

SIGNED: 04/06/2023

REVISIONS

DATE

04/06/2023 R.L.

APPROVED

DESCRIPTION

CHANGE MANUFACTURER'S NAME

US ALUMINUM	
950 SOLON RD.	
WAXAHACHIE, TX 75165	


REV

STORM WALL XL HURRICANE RESISTANT CURTAIN WALL — DRY GLAZED — LMI HVHZ MULLION AND JAMB CHARTS

DRAWN: DWG NO. 08-03022 B


SCALE NTS DATE 12/07/16 SHEET 4 OF 23


L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com




FOR ILLUSTRATION PURPOSES ONLY FOR INSTALLATION DETAILS SEE SHEETS 10 - 17


	REVISIONS		
REV	DESCRIPTION	DATE	APPROVED
В	CHANGE MANUFACTURER'S NAME	04/06/2023	R.L.

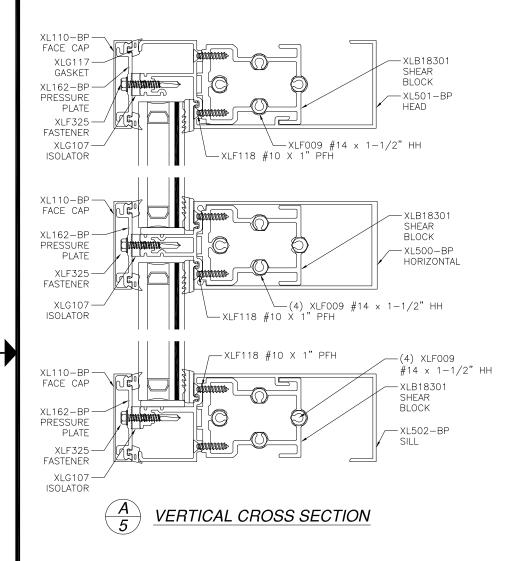


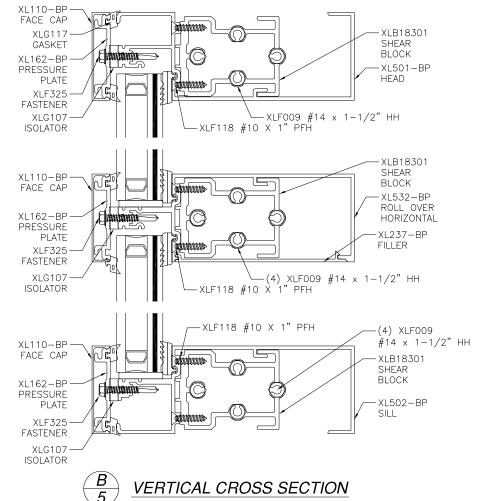

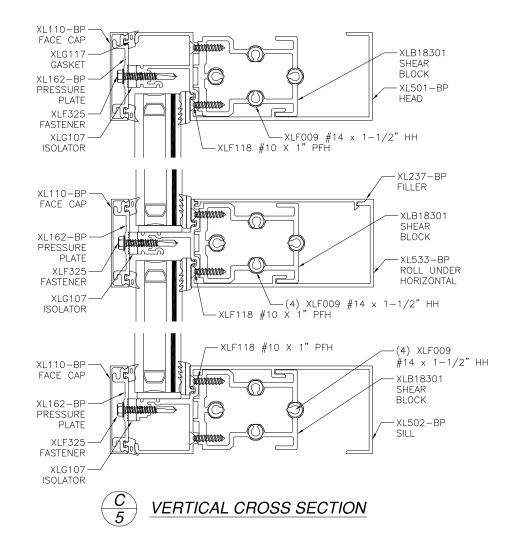



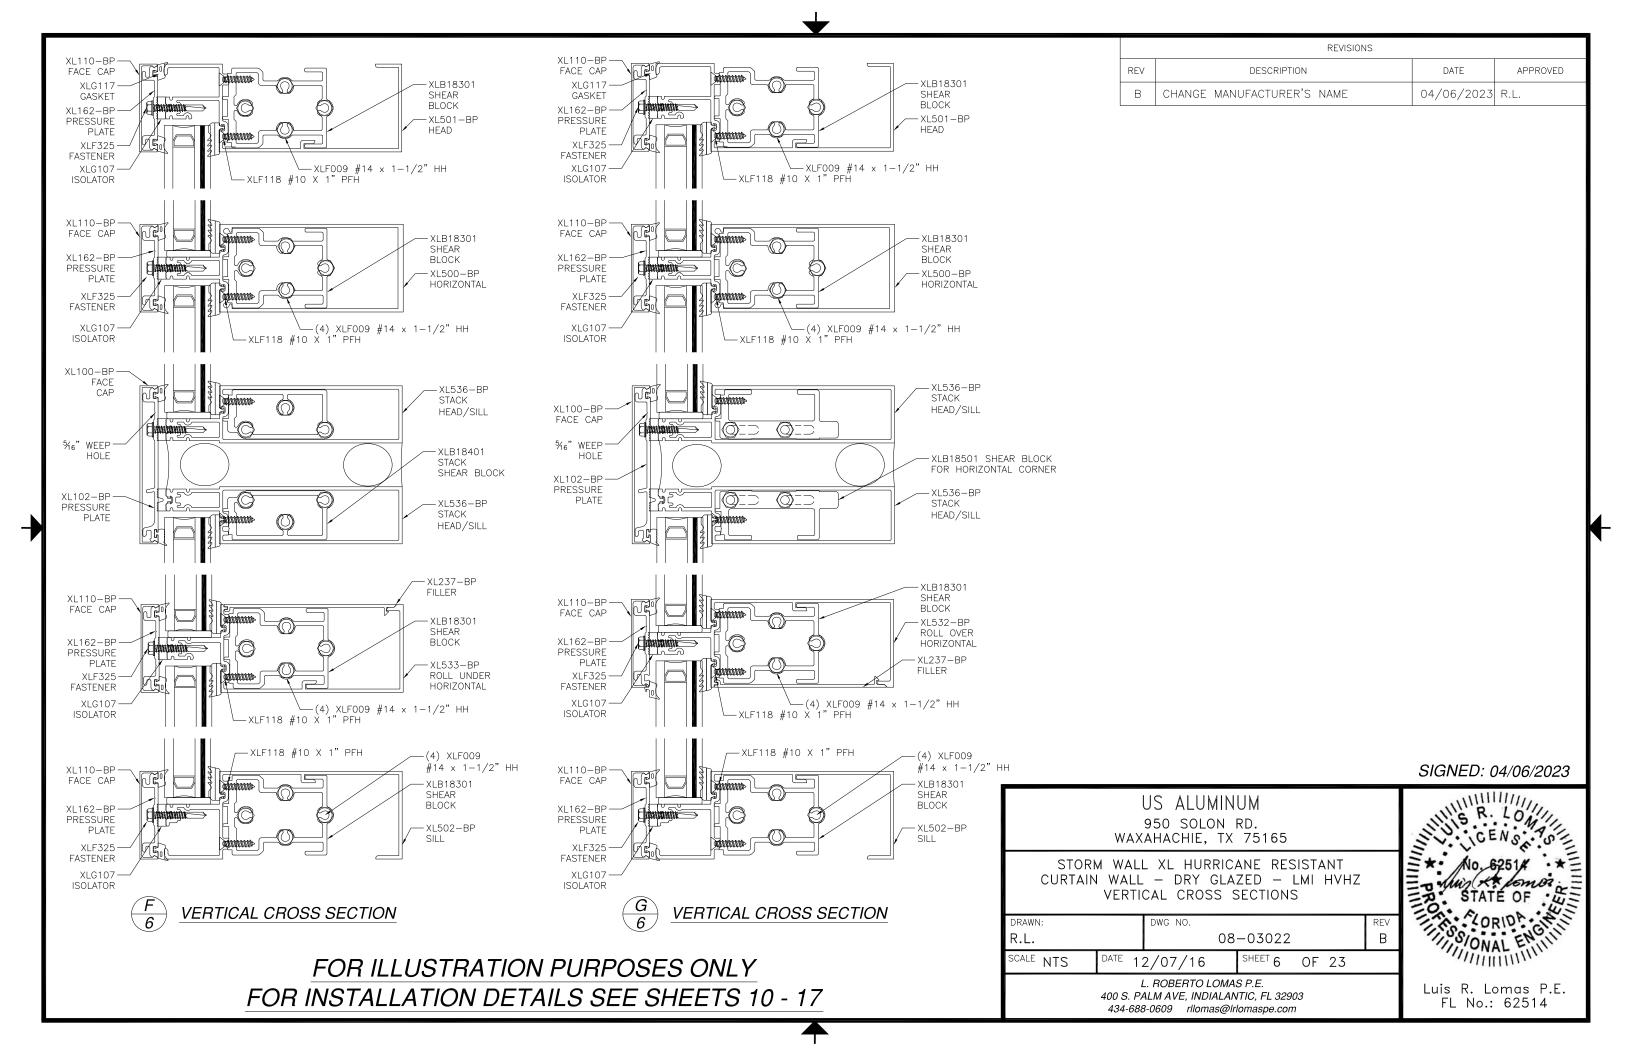

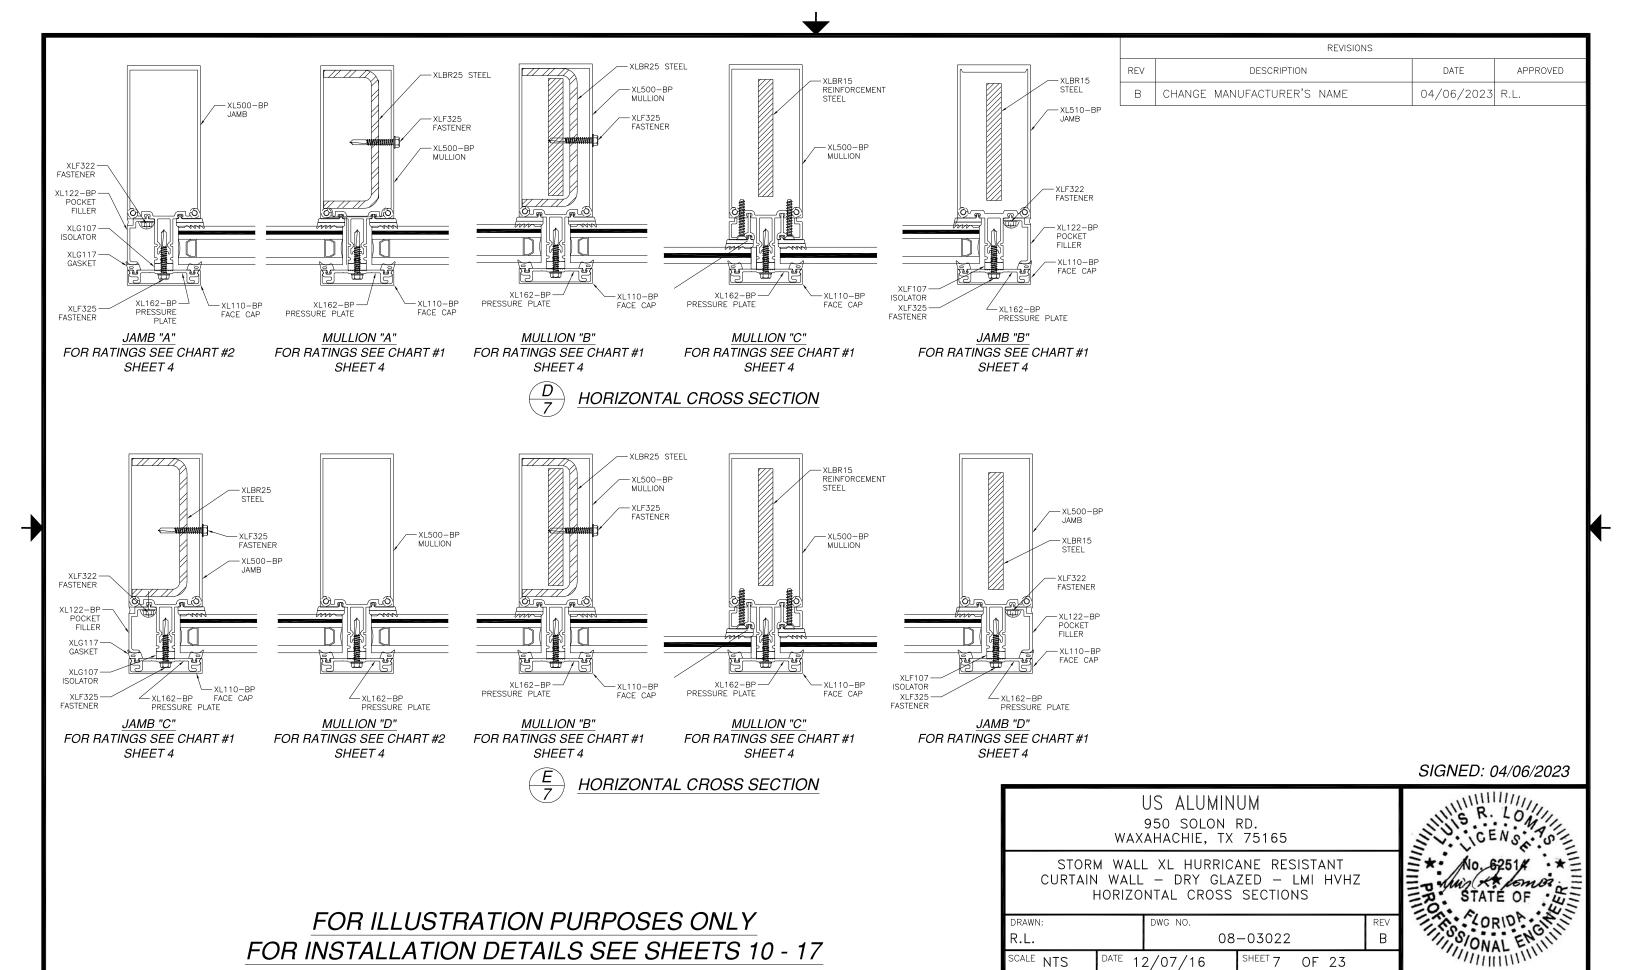

1


L. ROBERTO LOMAS P.E.

400 S. PALM AVE, INDIALANTIC, FL 32903

434-688-0609 rllomas@lrlomaspe.com


Luis R. Lomas P.E.

FL No.: 62514







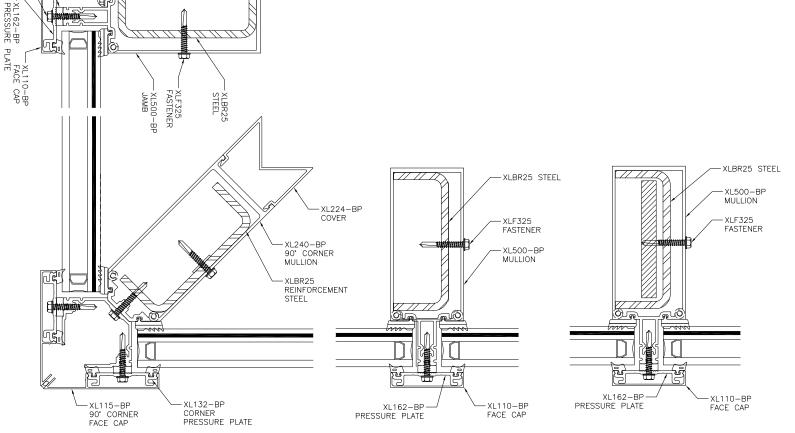

XLBR15
REINFORCEMENT
STEEL

XL500-BP
MULLION

XL500-BP
JAMB

XLF322
FASTENER

XL122-BP
POCKET
FILLER

XLG117
GASKET

XLG107
ISOLATOR

XL110-BP
FACE CAP
PRESSURE PLATE

FASTENER


<u>CORNER MULLION</u> FOR RATINGS SEE CHART #3 & #4 <u>MULLION "A"</u> FOR RATINGS SEE CHART #3 & #4

<u>MULLION "B"</u> FOR RATINGS SEE CHART #3 & #4 <u>MULLION "G"</u> FOR RATINGS SEE CHART #3 & #4 <u>JAMB "C"</u> FOR RATINGS SEE CHART #3 & #4

HORIZONTAL CROSS SECTION

SIGNED: 04/06/2023



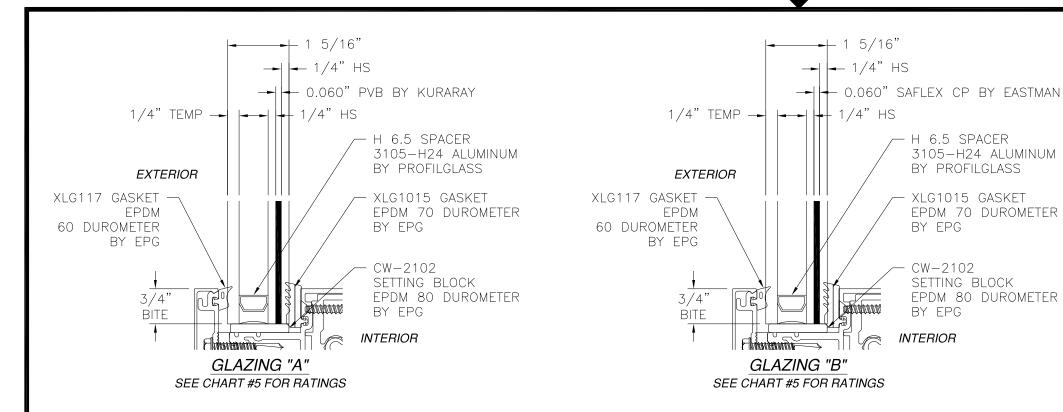

REVISIONS


REV DESCRIPTION DATE APPROVED

B CHANGE MANUFACTURER'S NAME 04/06/2023 R.L.

Chart #5
Design pressure per glass "A", "B", & "C" (psf)

Design pressure per grass A , B , & C (psi)										
D.L.O.		D.L.O. width (in)								
Height (in)	21.5	27.5	33.5	39.5	45.5	51.5	57.5	63.5	69.5	
36.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
42.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
48.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
54.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
60.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
66.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
72.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
78.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
84.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	66.2	
90.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	67.6	61.8	
96.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	63.4	57.9	

SIGNED: 04/06/2023

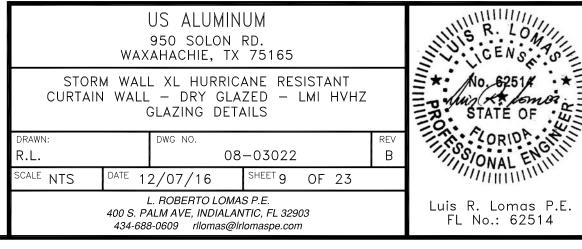

GLAZING "C"

SEE CHART #5 FOR RATINGS

1/4" HS -

EXTERIOR

XLG117 GASKET -

60 DUROMETER

EPDM

BY EPG

9/16"

- 1/4" HS

.090" SAFLEX CP BY EASTMAN

BY EPG

CW - 2102


BY EPG


MMW INTERIOR


XLG1015 GASKET EPDM 70 DUROMETER


SETTING BLOCK


EPDM 80 DUROMETER




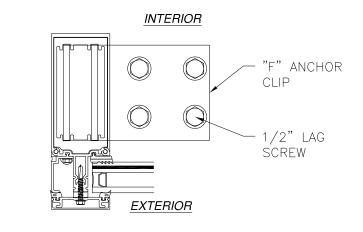

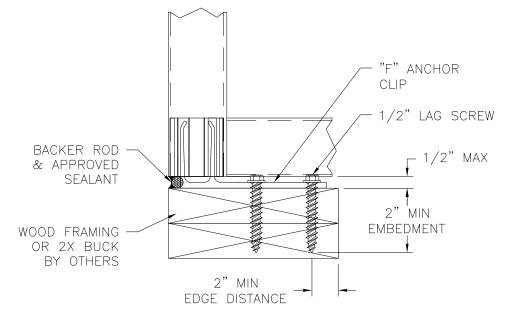





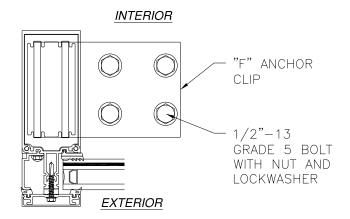

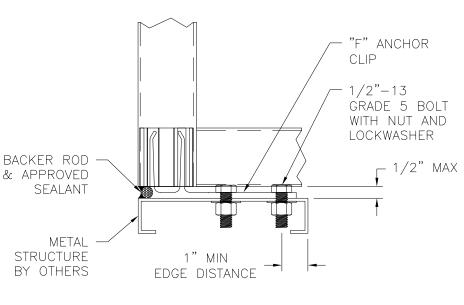

JAMB INSTALLATION DETAIL WITH "F" ANCHOR CLIP METAL STRUCTURE INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #8 FOR RATINGS

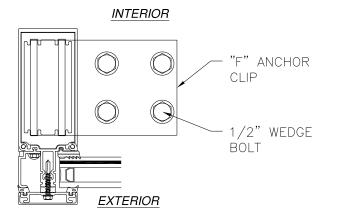

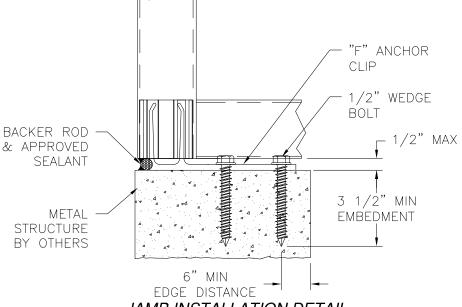


JAMB INSTALLATION DETAIL WITH "F" ANCHOR CLIP CONCRETE INSTALLATION SILL SHOWN, HEAD SIMILAR

SEE CHART #8 FOR RATINGS


SIGNED: 04/06/2023


NOTES:

- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

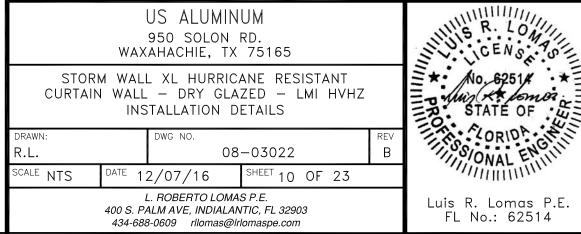





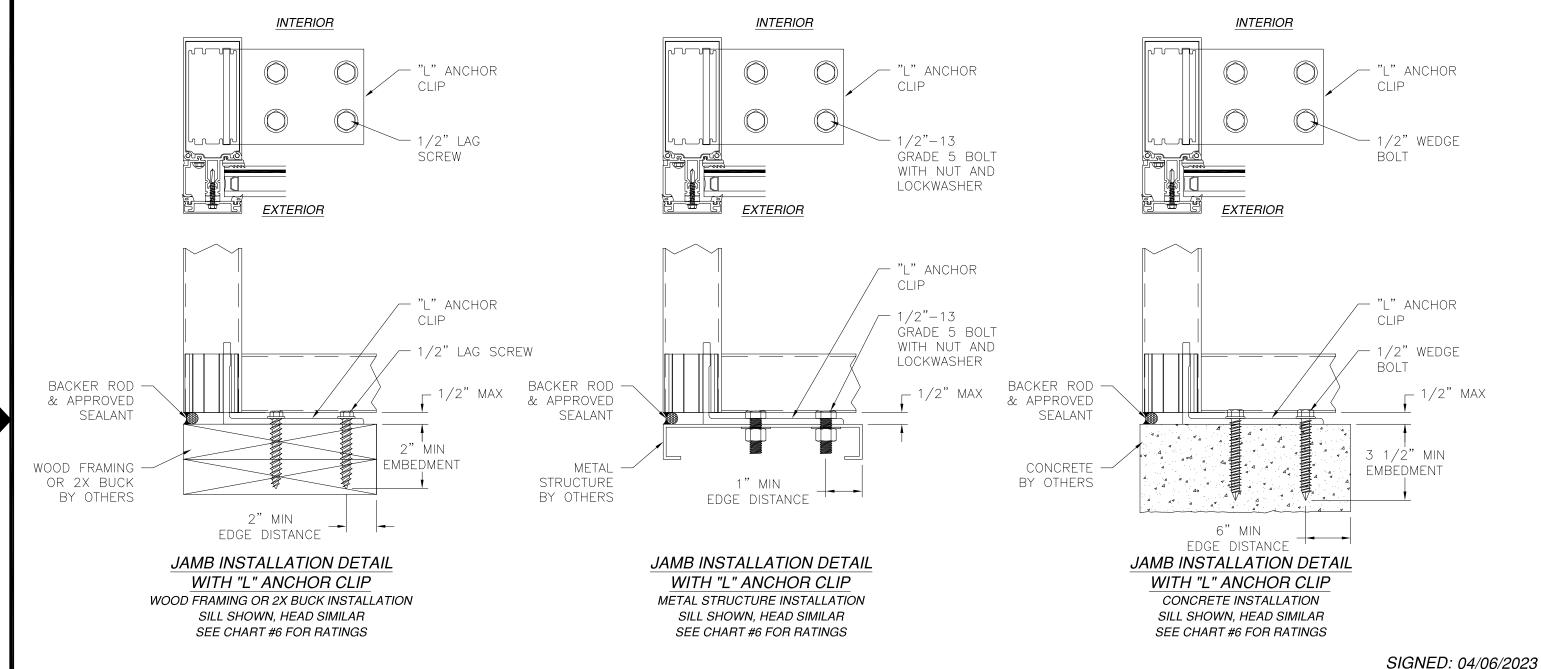

NOTES:


- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

US ALUMINUM 950 SOLON RD. WAXAHACHIE, TX 75165

STORM WALL XL HURRICANE RESISTANT CURTAIN WALL - DRY GLAZED - LMI HVHZ INSTALLATION DETAILS


DRAWN: DWG NO. R.L. 08-03022 SCALE NTS DATE 12/07/16 SHEET 11 OF 23


> L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com

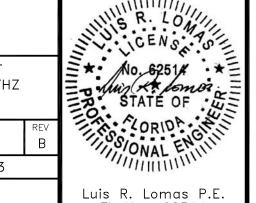


1/2" MAX

FL No.: 62514







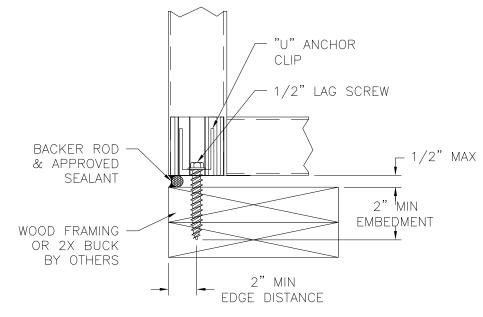

JAMB INSTALLATION DETAIL WITH "U" ANCHOR CLIP


WOOD FRAMING OR 2X BUCK INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #6 FOR RATINGS




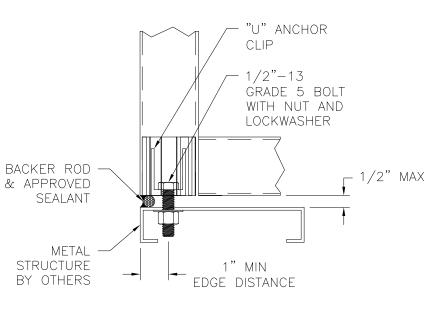

JAMB INSTALLATION DETAIL WITH "U" ANCHOR CLIP METAL STRUCTURE INSTALLATION

SILL SHOWN, HEAD SIMILAR SEE CHART #6 FOR RATINGS



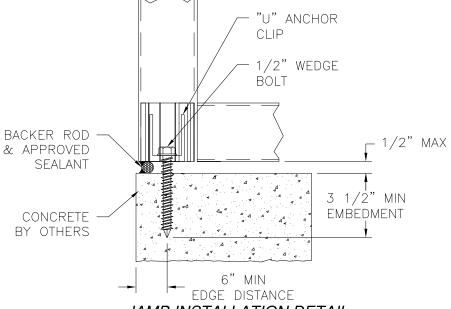

JAMB INSTALLATION DETAIL WITH "U" ANCHOR CLIP


CONCRETE INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #6 FOR RATINGS

SIGNED: 04/06/2023


NOTES:


- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


US ALUMINUM 950 SOLON RD. WAXAHACHIE, TX 75165 STORM WALL XL HURRICANE RESISTANT CURTAIN WALL - DRY GLAZED - LMI HVHZ INSTALLATION DETAILS DRAWN: DWG NO. R.L. 08-03022 SCALE NTS DATE 12/07/16 SHEET 12 OF 23 L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com









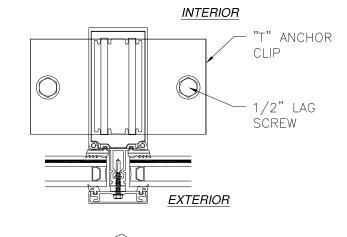

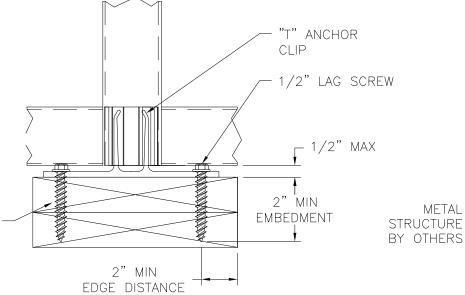




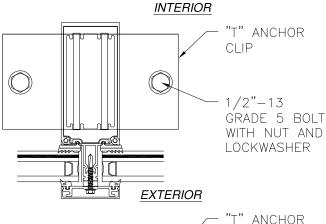


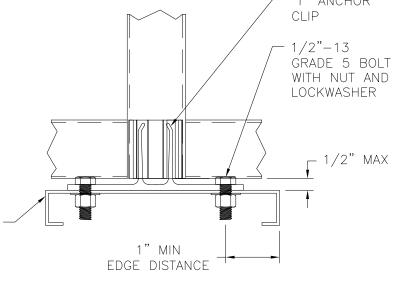

MULLION INSTALLATION DETAIL WITH "T" ANCHOR CLIP METAL STRUCTURE INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #8 FOR RATINGS

METAL

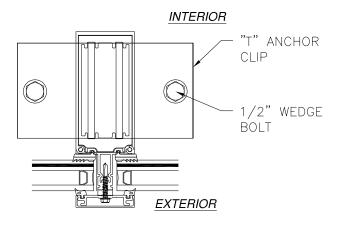

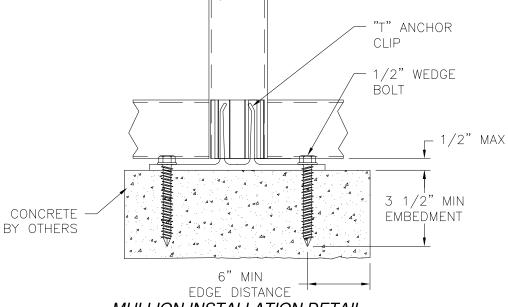

MULLION INSTALLATION DETAIL WITH "T" ANCHOR CLIP

CONCRETE INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #8 FOR RATINGS

SIGNED: 04/06/2023

NOTES:


WOOD FRAMING

OR 2X BUCK


BY OTHERS

- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

US ALUMINUM 950 SOLON RD. WAXAHACHIE, TX 75165 STORM WALL XL HURRICANE RESISTANT CURTAIN WALL - DRY GLAZED - LMI HVHZ INSTALLATION DETAILS DRAWN: DWG NO. R.L. 08-03022 SCALE NTS DATE 12/07/16 SHEET 13 OF 23 L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com








INTERIOR

"T" ANCHOR

1/2" WEDGE

CLIP

BOLT

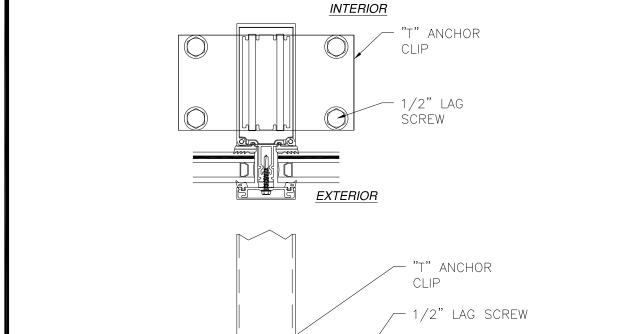

1/2" MAX


METAL

STRUCTURE

BY OTHERS

2" MIN


EMBEDMENT

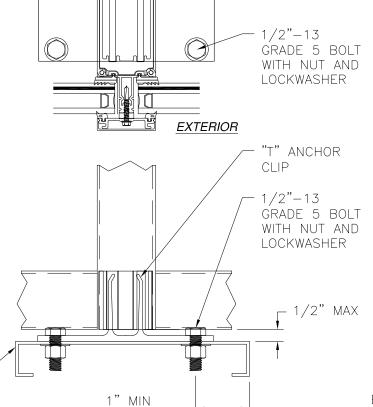

INTERIOR

"T" ANCHOR

CLIP

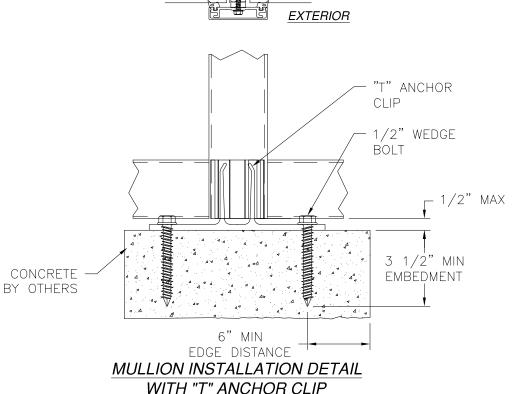

CONCRETE INSTALLATION

SILL SHOWN, HEAD SIMILAR

SEE CHART #8 FOR RATINGS

MULLION INSTALLATION DETAIL WITH "T" ANCHOR CLIP

EDGE DISTANCE

2" MIN

WOOD FRAMING OR 2X BUCK INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #8 FOR RATINGS

MULLION INSTALLATION DETAIL WITH "T" ANCHOR CLIP

EDGE DISTANCE

METAL STRUCTURE INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #8 FOR RATINGS

SIGNED: 04/06/2023


NOTES:


WOOD FRAMING


OR 2X BUCK


BY OTHERS


- I. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

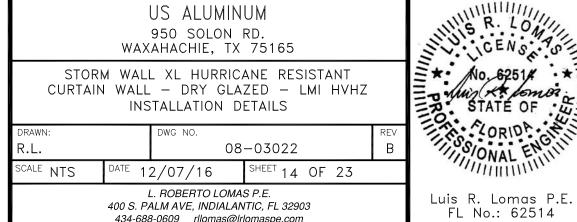

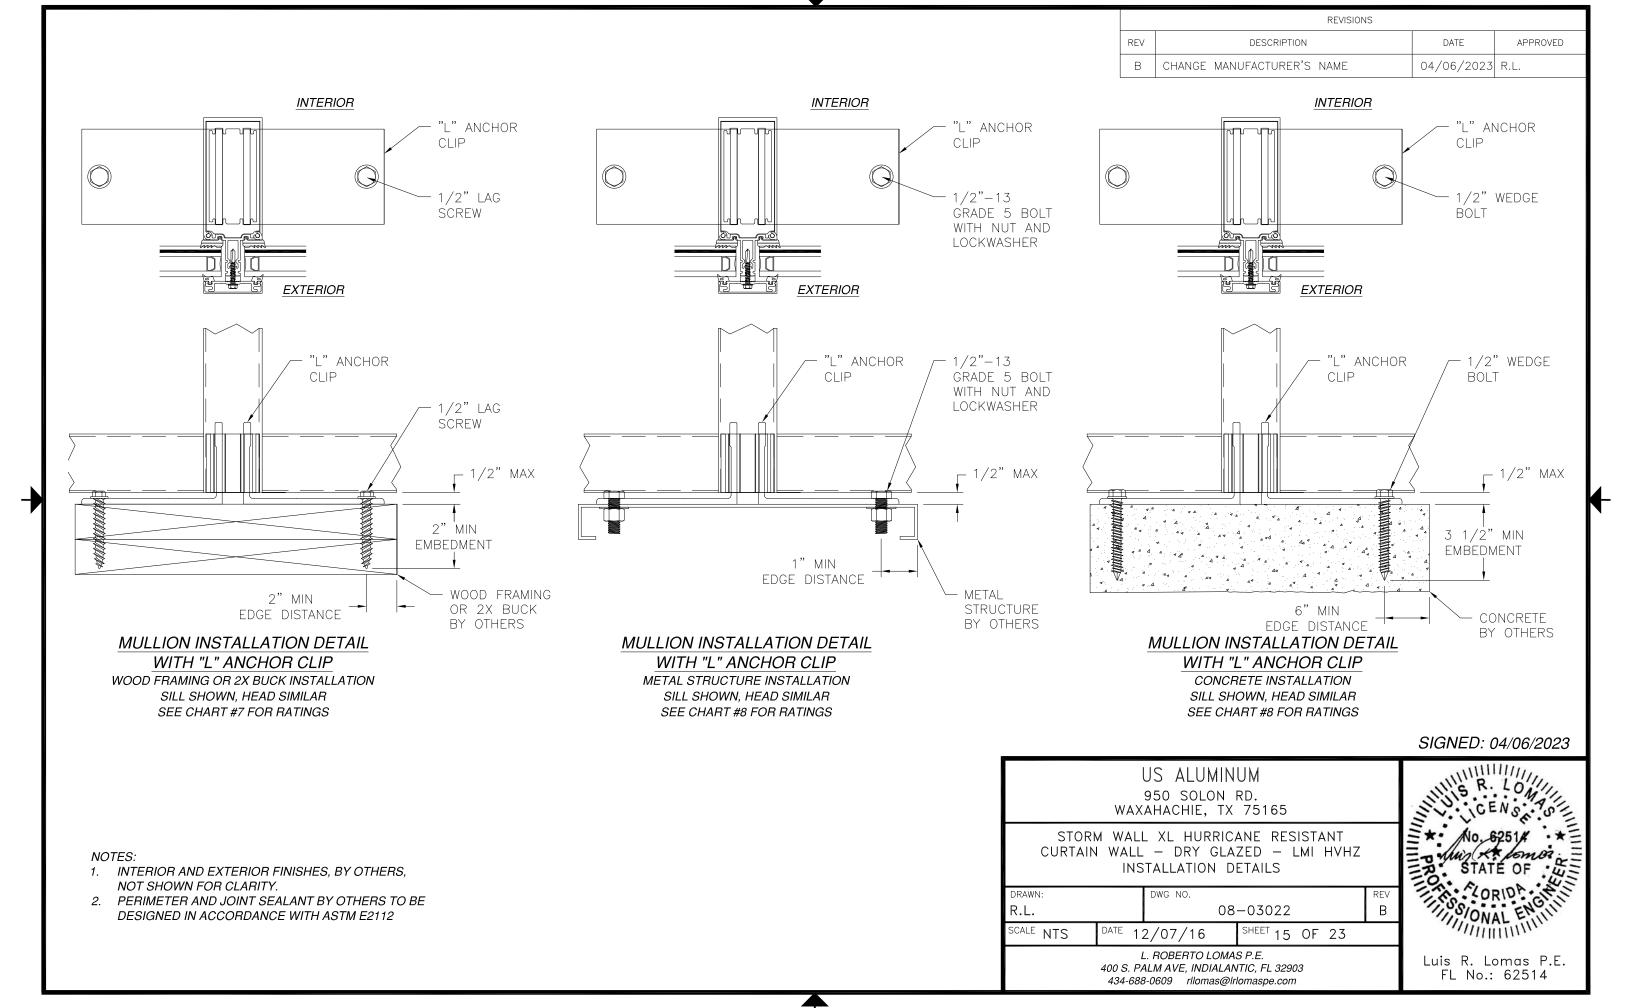

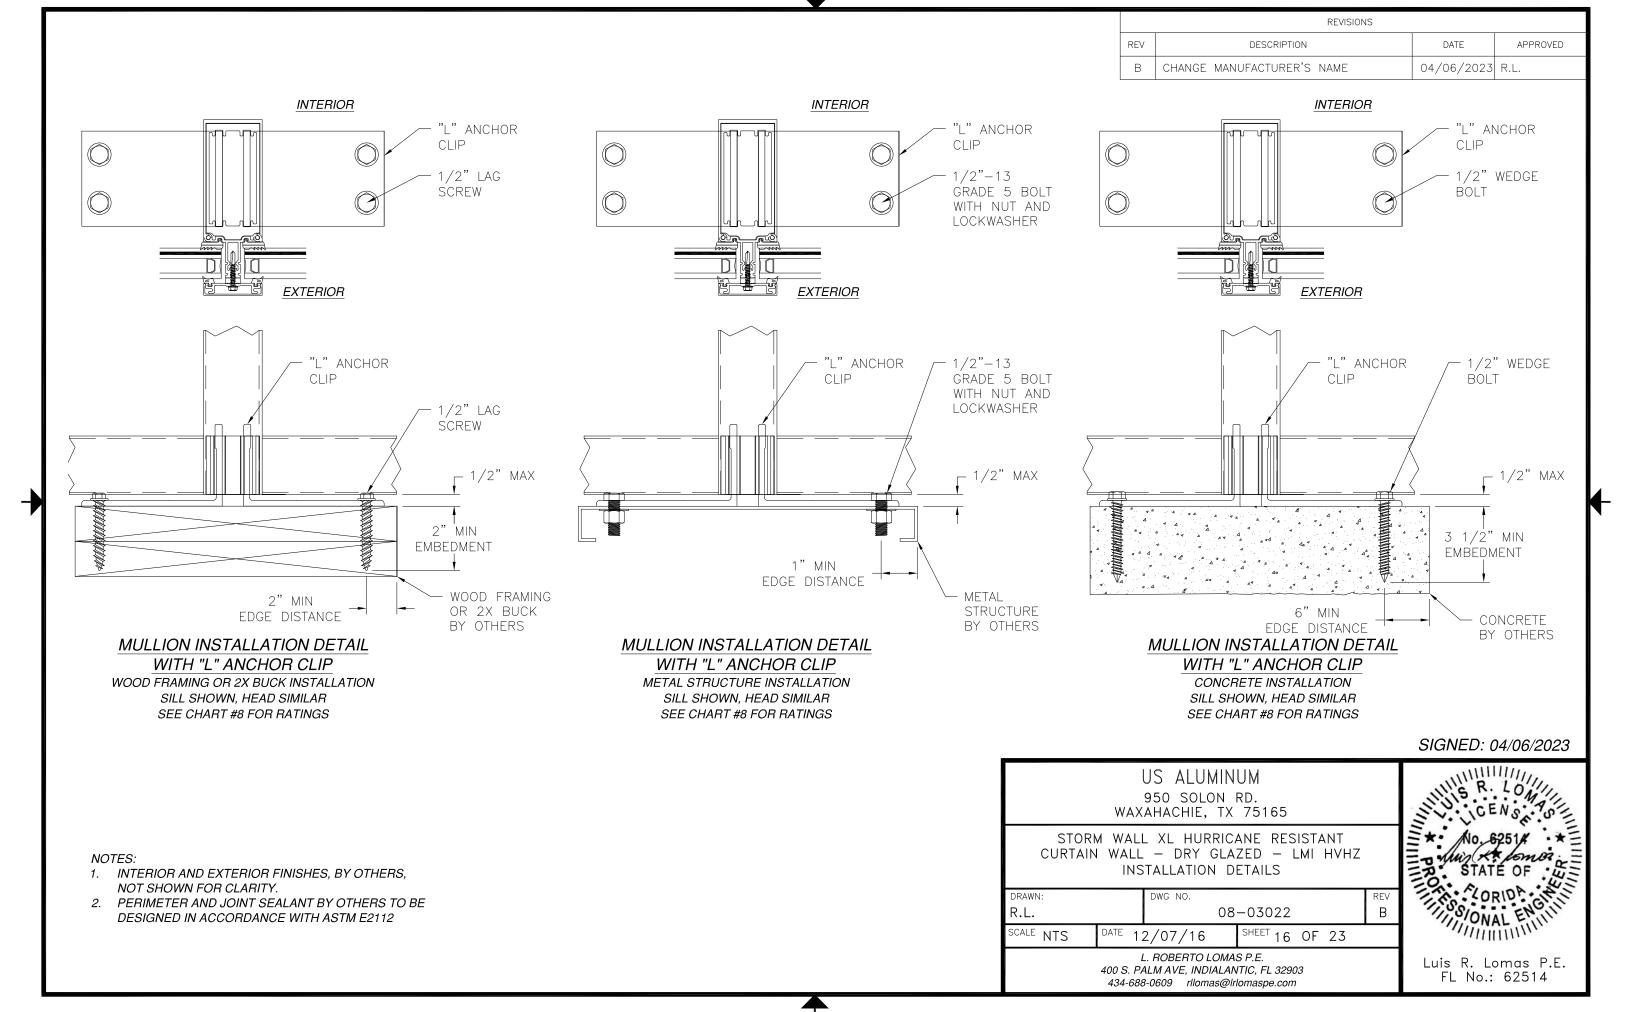

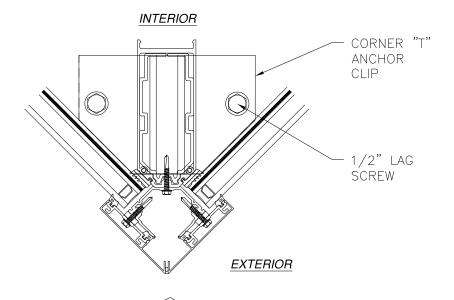

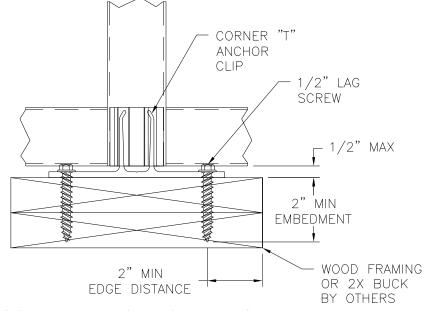

CORNER MULLION INSTALLATION DETAIL WITH "T" ANCHOR CLIP WOOD FRAMING OR 2X BUCK INSTALLATION


SILL SHOWN, HEAD SIMILAR SEE CHART #7 FOR RATINGS

INTERIOR CORNER "T" ANCHOR CLIP 1/2"-13 GRADE 5 BOLT WITH NUT AND LOCKWASHER **EXTERIOR** CORNER "T" ANCHOR CLIP 1/2"-13GRADE 5 BOLT WITH NUT AND LOCKWASHER _ 1/2" MAX **METAL** 1" MIN STRUCTURE

CORNER MULLION INSTALLATION DETAIL WITH "T" ANCHOR CLIP

EDGE DISTANCE

METAL STRUCTURE INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #8 FOR RATINGS

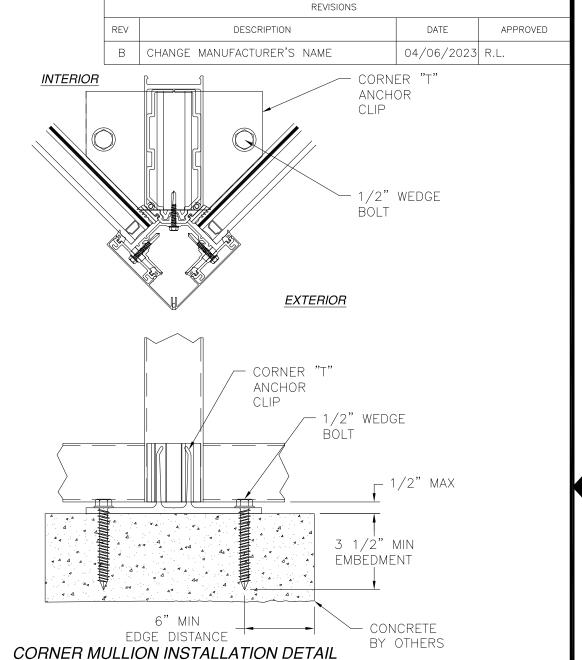

WITH "T" ANCHOR CLIP

CONCRETE INSTALLATION SILL SHOWN, HEAD SIMILAR SEE CHART #8 FOR RATINGS

SIGNED: 04/06/2023

NOTES:

- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112




DATE 12/07/16

SCALE NTS

L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com

SHEET 17 OF 23



Luis R. Lomas P.E. FL No.: 62514



BY OTHERS

Chart #6
Design pressure for anchoring
into wood, metal or concrete with (2) or (4)anchors per clip

into wood, metal or concrete with (2) or (4)anchors per clip										
Frame				Tribut	ary wid	th (in)				
Height (in)	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0	
60.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
66.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
72.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
78.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
84.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
90.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
96.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
102.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
108.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
114.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
120.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
126.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
132.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
138.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
144.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
150.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
156.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
162.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
168.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
174.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	
175.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	

Chart #7
Design pressure for anchoring into wood with (2) anchors per clip

Frame	Tributary width (in)								
Height (in)	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0
60.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
66.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
72.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
78.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
84.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
90.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	68.9
96.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	64.6
102.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	66.3	60.8
108.0	70.0	70.0	70.0	70.0	70.0	70.0	68.9	62.6	57.4
114.0	70.0	70.0	70.0	70.0	70.0	70.0	65.3	59.3	54.4
120.0	70.0	70.0	70.0	70.0	70.0	68.9	62.0	56.4	51.7
126.0	70.0	70.0	70.0	70.0	70.0	65.6	59.0	53.7	49.2
132.0	70.0	70.0	70.0	70.0	70.0	62.6	56.4	51.2	47.0
138.0	70.0	70.0	70.0	70.0	67.4	59.9	53.9	49.0	44.9
144.0	70.0	70.0	70.0	70.0	64.6	57.4	51.7	47.0	43.1
150.0	70.0	70.0	70.0	70.0	62.0	55.1	49.6	45.1	41.3
156.0	70.0	70.0	70.0	68.1	59.6	53.0	47.7	43.4	39.7
162.0	70.0	70.0	70.0	65.6	57.4	51.0	45.9	41.8	38.3
168.0	70.0	70.0	70.0	63.3	55.4	49.2	44.3	40.3	36.9
174.0	70.0	70.0	70.0	61.1	53.4	47.5	42.8	38.9	35.6
175.0	70.0	70.0	70.0	60.7	53.1	47.2	42.5	38.6	35.4

REVISIONS										
REV	DESCRIPTION	DATE APPROVE								
В	CHANGE MANUFACTURER'S NAME	04/06/2023	R.L.							


Chart #8 Design pressure for anchoring into wood with (4) anchors per clip or into metal or concrete with (2) or (4) anchors per clip

The metal of concrete with (2) or (4) anchors per chp									
Frame	Tributary width (in)								
Height (in)	24.0	30.0	36.0	42.0	48.0	54.0	60.0	66.0	72.0
60.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
66.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
72.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
78.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
84.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
90.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
96.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
102.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
108.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
114.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
120.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
126.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
132.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
138.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
144.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
150.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
156.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
162.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
168.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
174.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0
175.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0


SIGNED: 04/06/2023


US ALUMINUM 950 SOLON RD. WAXAHACHIE, TX 75165					
STORM WALL XL HURRICANE RESISTANT CURTAIN WALL — DRY GLAZED — LMI HVHZ INSTALLATION DETAILS RATING CHARTS					
DRAWN: R.L.		DWG NO. 08-03022		REV B	
SCALE NTS	DATE 12/07/16		SHEET 18 OF 23		
1 DODEDTO 1 01440 D.5					

L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com





REVISIONS							
REV	DESCRIPTION	DATE	APPROVED				
В	CHANGE MANUFACTURER'S NAME	04/06/2023	R.L.				

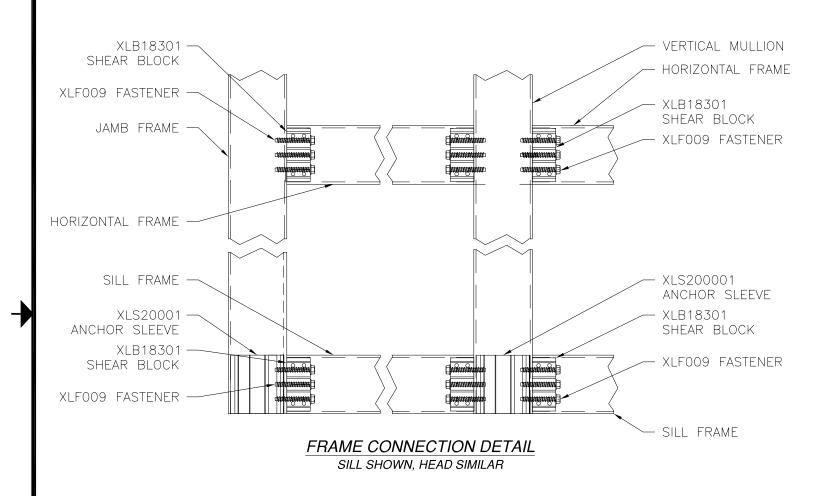


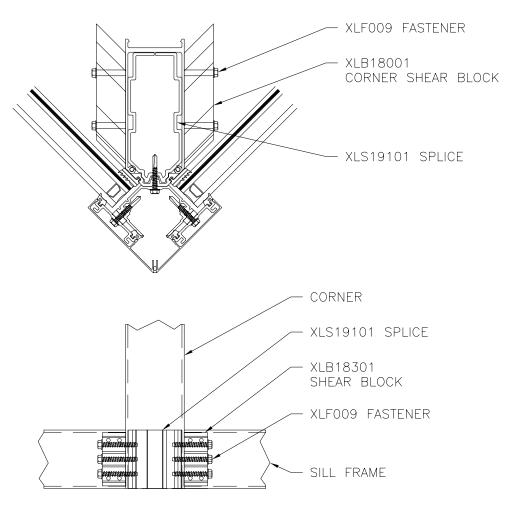


CORNER FRAME CONNECTION DETAIL SILL SHOWN, HEAD SIMILAR

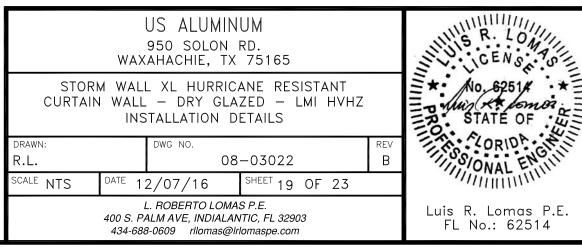



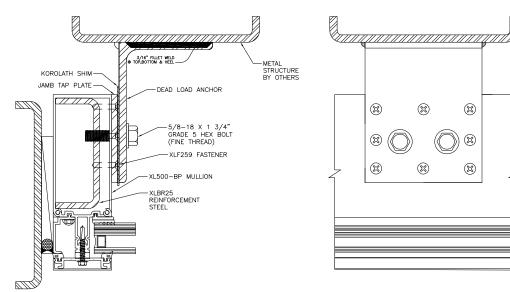

JAMB DEAD LOAD ANCHORS AT MIDSPAN DETAIL

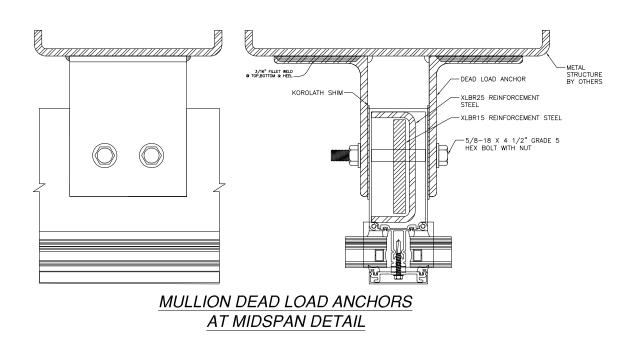

CORNER DEAD LOAD ANCHORS AT MIDSPAN DETAIL

- METAL STRUCTURE BY OTHERS

5/8-18 X 4 1/2" GRADE 5 HEX BOLT WITH NUT

US ALUMINUM 950 SOLON RD. WAXAHACHIE, TX 75165 STORM WALL XL HURRICANE RESISTANT

CURTAIN WALL - DRY GLAZED - LMI HVHZ INSTALLATION DETAILS

DRAWN: DWG NO. R.L. 08-03022 SCALE NTS DATE 12/07/16 SHEET 20 OF 23

> L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com

