

EMBEDMENT 11/2" MIN MIN. DISTANCE FROM EDGE: 3/4" NOTE: Caulk between Nailing Flange & Wood Opening HORIZONTAL SECTION JAMB SECTION (TYP) -1/4" MAX SHIM SPACE

NAIL

FIN INSTALLATION

NO	+35/-40	48 × 96
IMPACT	DP RATING	Max Frame

Installation Notes:

Seal flange/frame to substrate.

ယ

- into the wood framing. For two (2X) wood frame substrate (min. S.G. = 0.42). Use #8 PH or greater fastener through the nail fin with sufficient length to penetrate a minimum of 1 1/2"
- Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the

General Notes:


- Building Code (FBC) excluding HVHZ and the industry requirement for the stated conditions. the adopted International Building Code (IBC), the International Residential Code (IRC), the Florida The product shown herein is designed, tested and manufactured to comply with the wind load criteria of
- 0 0 4 All glazing shall conform to ASTM E1300.
 - At minimum, glazing shall be Double strength annealed insulating glass
- Use structural or composite shims where required

conditions. For the complete installation procedure, see the instructions www.jeld-wen.com/resources/installation. not address the sealing consideration that may arise in different wall noted. It is not intended as a guide to the installation process and does packaged with the window or go to window to achieve the rated design pressure up to the size limitations This schedule addresses only the fasteners required to anchor the

DISCLAIMER:


except as authorized by JELD-WEN Inc. reproduced or copied in whole or in part or used or disclosed to others This drawing and its contents are confidential and are not to be

SHEET 1 OF 4	A REV.	CAD DWG. No.: R PremVinyITSH Cert	PLANT NAME AND LOCATION:	110-16-144
				D014483
	gnung	Premium vinyi ilit single Hung		J GOOSSEN
	-	7	TITLE:	J. GOOSSEN
Phone: (800) 535-3936	_		SCALE: NTS	A. MCMILLAN
3737 Lakeport Blvd	• K		12/08/17	

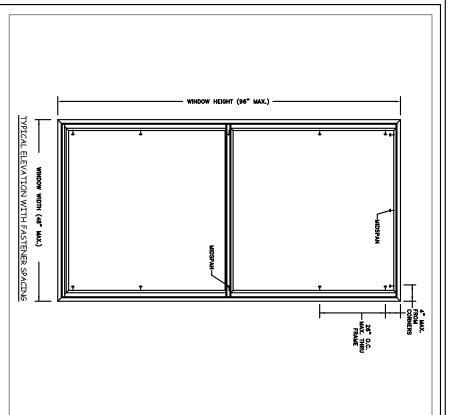

FRAME SECTION (TYP) VERTICAL SECTION MIN. DISTANCE FROM EDGE: 2 1/4 MIN. DISTANCE FROM EDGE: 2 1/4 -1/4" MAX SHIM SPACE 1 1/2" MIN. EMBEDMENT 1/4" MAX SHIM SPACE 1 1/2" MIN. EMBEDMENT

THROUGH FRAME INSTALLATION

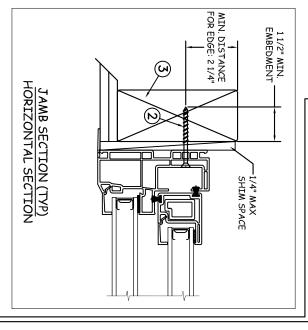

NO	+35/-40	48 × 96
IMPACT	DP RATING	Max Frame

Installation Notes:

Seal flange/frame to substrate.

ယ

- into the wood framing. For two (2X) wood frame substrate (min. S.G. = 0.42). Use #8 PH or greater fastener through the frame with sufficient length to penetrate a minimum of 1 1/2"
- Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads project of installation. to the structure. The host structure is the responsibility of the architect or engineer of record for the

General Notes:

- Building Code (FBC) excluding HVHZ and the industry requirement for the stated conditions. the adopted International Building Code (IBC), the International Residential Code (IRC), the Florida The product shown herein is designed, tested and manufactured to comply with the wind load criteria of
- All glazing shall conform to ASTM E1300.
- 0 0 4 At minimum, glazing shall be Double strength annealed insulating glass
- Use structural or composite shims where required

conditions. For the complete installation procedure, see the instructions www.jeld-wen.com/resources/installation. not address the sealing consideration that may arise in different wall noted. It is not intended as a guide to the installation process and does packaged with the window or go to window to achieve the rated design pressure up to the size limitations This schedule addresses only the fasteners required to anchor the

DISCLAIMER:

except as authorized by JELD-WEN Inc. reproduced or copied in whole or in part or used or disclosed to others This drawing and its contents are confidential and are not to be

2 OF 4	SHEET	Α	REV	PremVinyITSH Cert	PLANT NAME AND LOCATION:	PLANT NAM	NTIFIER NO. 10-16-144
			i				1/PROJECT No. 014483
		дung	ē	Premium vinyi Tiit Single Hung	π.		ROVED BY: GOOSSEN
		- i	<u>-</u>		3	TITLE:	GOOSSEN
Phone: (800) 535-3936	ne: (800				NTS U		MCMILLAN
Klamath Falls, OR. 97601	ath Falls,	Klam	1			SCALE:	WN BY
3737 Lakeport Blvd	3737 La		4		12/08/17	DAILE: 12,	SECT ENGINEER.

DRA J. GARA

IDENTIFIER NO. 110-16-144