

4


3

2

1



QUICK SLING SUPERSTANDS INSTRUCTION SET

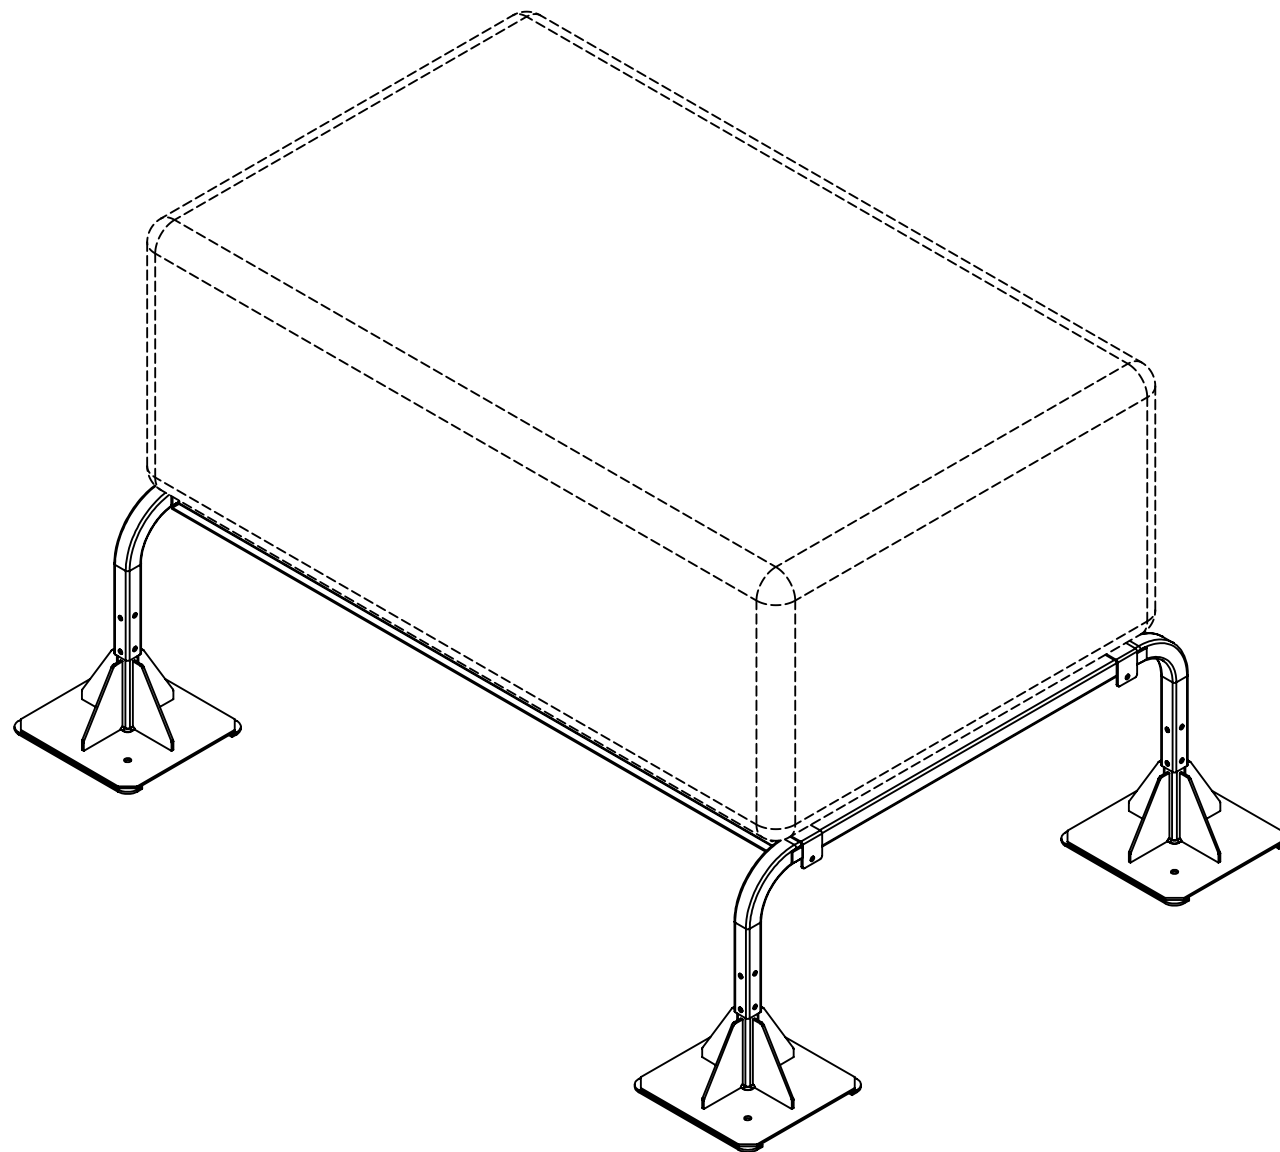

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES [MILLIMETERS]
 TOLERANCES ARE: ANGLES ±1.0°
 FRACTIONAL SIZES X/Y ±1/64

INCHES	[MILLIMETERS]
X = ±0.1	[X = ± 2.5]
.XX = ±0.01	[.X = ± 1.3]
.XXX = ±0.005	[.XX = ±0.13]

THIRD ANGLE PROJECTION



CONFIDENTIAL - PROPRIETARY - DO NOT COPY
 THE INFORMATION SET FORTH IN THIS DOCUMENT AND RELATED INFORMATION IS THE CONFIDENTIAL PROPERTY OF DIVERSITECH CORPORATION, AND IS NOT TO BE COPIED OR REPRODUCED OR DISTRIBUTED IN ANY FORM WITHOUT PRIOR WRITTEN PERMISSION FROM DIVERSITECH CORPORATION.
DO NOT SCALE DRAWING

ASSEMBLY:	SUPERSTANDS
DWG. NO.	FL-44215.2
DESCRIPTION	

WEIGHT	GMS.
REV.	1
SHEET	1 OF 2

4

3

2


1

B

B

A

A

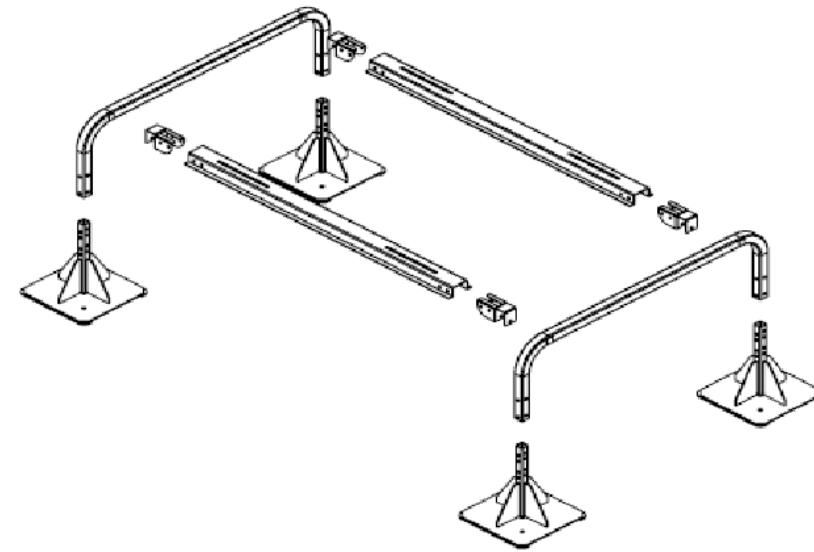


Parts List:

- (2) – Single 1 ½” x 1 ½” Steel U-Bar w/ Feet
- (2) – 2 11 Gauge Cross Rails
- (4) – Single Side Sliding Saddles

1. Each foot is adjustable in ¼” increments up to 1 ¾”. Remove bolts and adjust to your desired height.
2. Once feet are adjusted to the desired height you are now ready to adjust the sliding saddles. The legs allow the saddles to be placed in any desired position between the saddle brakes

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES [MILLIMETERS]	
TOLERANCES ARE: ANGLES ±1.0°	
FRACTIONAL SIZES X/Y ±1/64	
INCHES	[MILLIMETERS]
X = ±0.1	[X = ± 2.5]
.XX = ±0.01	[.X = ± 1.3]
.XXX = ±0.005	[.XX = ±0.13]



<small>CONFIDENTIAL - PROPRIETARY - DO NOT COPY</small> <small>THE INFORMATION SET FORTH IN THIS DOCUMENT AND RELATED INFORMATION IS THE CONFIDENTIAL PROPERTY OF DIVERSITECH CORPORATION, AND IS NOT TO BE COPIED OR REPRODUCED OR DISTRIBUTED IN ANY FORM WITHOUT PRIOR WRITTEN PERMISSION FROM DIVERSITECH CORPORATION.</small> DO NOT SCALE DRAWING <small>DESCRIPTION</small>	<small>ASSEMBLY:</small> SUPERSTANDS <small>DWG. NO.</small> FL-44215.2	<small>WEIGHT</small> GMS. <small>REV.</small> 1 <small>SHEET</small> 2 OF 2