



MIAMI-DADE COUNTY, FLORIDA
PRODUCT CONTROL SECTION
 11805 SW 26 Street, Room 208
 Miami, Florida 33175-2474
www.miamidade.gov/building

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
NOTICE OF ACCEPTANCE (NOA)

PGT Industries, Inc.
1070 Technology Drive
North Venice, FL 34275

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "PW7720A" Aluminum Fixed Window – L.M.I.

APPROVAL DOCUMENT: Drawing No. **MD-7720A.1**, titled "Fixed Window Installation Guidelines", sheets 1 through 10 of 10, dated 04/12/13, with revision E dated 03/11/20, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA No. 18-0430.05** and consists of this page 1 and evidence pages E-1, E-2, E-3 and E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by **Manuel Perez, P.E.**



Manuel Perez
 7/28/20

NOA No. 20-0401.10
Expiration Date: February 19, 2024
Approval Date: August 06, 2020
 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED


1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

1. Manufacturer's die drawings and sections.
(Submitted under NOA No. 08-1112.09)
2. Drawing No. **MD-7720A.1**, titled "Fixed Window Installation Guidelines", sheets 1 through 10 of 10, dated 04/12/13, with revision D dated 03/16/18, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 18-0430.05)

B. TESTS

1. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of a PVC sliding glass door, a PVC fixed window and an aluminum sliding glass door, using: Kodispace 4SG TPS spacer system, Duraseal® spacer system, Super Spacer® NXT™ spacer system and XL Edge™ spacer system at insulated glass, prepared by Fenestration Testing Laboratory, Inc., Test Reports No. **FTL-8717**, **FTL-8968** and **FTL-8970**, dated 11/16/15, 06/07/16 and 06/02/16 respectively, all signed and sealed by Idalmis Ortega, P.E.
(Submitted under NOA No. 16-0629.14)
2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
6) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202-94
along with marked-up drawings and installation diagram of an aluminum fixed window, prepared by Fenestration Testing Laboratory, Inc., Test Report No. **FTL-7212**, dated 03/21/13, signed and sealed by Marlin D. Brinson, P.E.
(Submitted under NOA No. 13-0502.03)
3. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of an aluminum fixed window, prepared by Fenestration Testing Laboratory, Inc., Test Reports No. **FTL-3835** and **FTL-3850**, dated 07/18/03 and 07/31/03 respectively, all signed and sealed by Joseph C. Chan, P.E.
(Submitted under NOA No. 03-1105.02)

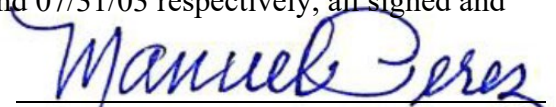
Manuel Perez, P.E.
Product Control Examiner
NOA No. 20-0401.10
Expiration Date: February 19, 2024
Approval Date: August 06, 2020

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC 6th Edition (2017)**, prepared by manufacturer, dated 04/19/18, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 18-0430.05)
2. Glazing complies with **ASTM E1300-09**

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **16-1117.01** issued to **Kuraray America, Inc.** for their "**Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers**" dated 01/19/17, expiring on 07/08/19.
2. Notice of Acceptance No. **14-0916.11** issued to **Kuraray America, Inc.** for their "**SentryGlas® (Clear and White) Glass Interlayer**" dated 06/25/15, expiring on 07/04/18.
3. TREMCO Part No. **TR-14271E** EPDM exterior glazing gasket complying with the following:
 - a) ASTM C864 Specification for Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers with Option II exceptions.
 - b) ASTM D412 Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension of 1600 PSI.
 - c) ASTM D395B Test Methods for Rubber Property - Compression Set for 22 HRS 158°F.
 - d) ASTM D 624 Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers of 143 lb./ in.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 6th Edition (2017)**, dated April 20, 2018, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 18-0430.05)
2. Statement letter of no financial interest, dated April 20, 2018, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 18-0430.05)
3. Proposal No. **17-1508** issued by the Product Control Section, dated November 16, 2017, signed by Jorge Plasencia, P.E., Product Control Unit Supervisor
(Submitted under NOA No. 18-0430.05)


Manuel Perez, P.E.
Product Control Examiner
NOA No. 20-0401.10
Expiration Date: February 19, 2024
Approval Date: August 06, 2020

PGT Industries, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

4. Proposal No. **16-1372B** issued by the Product Control Section, dated 11/09/16, signed by Manuel Perez, P.E.
(Submitted under NOA No. 17-0614.11)
5. Proposal No. **16-0125** issued by the Product Control Section, dated March 09, 2016, signed by Ishaq Chanda, P.E.
(Submitted under NOA No. 17-0614.11)
6. Laboratory compliance letter for Test Report No. **FTL-7212**, dated 03/21/13, signed and sealed by Marlin D. Brinson, P.E.
(Submitted under NOA No. 13-0502.03)
7. Laboratory compliance letter for Test Reports No. **FTL-3834** and **FTL-3847**, dated 07/30/03 and 07/31/03 respectively, all signed and sealed by Joseph C. Chan, P.E.
(Submitted under NOA No. 03-1105.01)

G. OTHERS

1. Notice of Acceptance No. **17-0614.11**, issued to PGT Industries, Inc. for their Series "PW-701/720/820" Aluminum Fixed Window – L.M.I., approved on 10/12/17 and expiring on 02/19/19.

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **MD-7720A.1**, titled "Fixed Window Installation Guidelines", sheets 1 through 10 of 10, dated 04/12/13, with revision E dated 03/11/20, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.

B. TESTS

1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
6) Forced Entry Test, per ASTM F588 and TAS 202-94
along with marked-up drawings and installation diagram of all PGT Industries, Inc. representative units listed below and tested to qualify **Dowsil 791** and **Dowsil 983** silicones, prepared by Fenestration Testing Laboratory, Inc., Test Reports No.:



Manuel Perez, P.E.
Product Control Examiner
NOA No. 20-0401.10
Expiration Date: February 19, 2024
Approval Date: August 06, 2020

PGT Industries, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED (CONTINUED)

B. TESTS (CONTINUED)

FTL-7897, PGT PW5520 PVC Fixed Window (unit 6 in proposal), dated 09/03/14
FTL-20-2107.1, PGT SGD780 Aluminum Sliding Glass Door (unit 7 in proposal)
FTL-20-2107.2, PGT CA740 Alum. Outswing Casement Window (unit 8 in proposal)
FTL-20-2107.3, PGT PW7620A Aluminum Fixed Window (unit 9 in proposal) and
FTL-20-2107.4, PGT PW7620A Aluminum Fixed Window (unit 10 in proposal)
dated 07/13/20, all signed and sealed by Idalmis Ortega, P.E

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC 6th Edition (2017)**, prepared by manufacturer, dated 04/19/18 and revised and updated to the **FBC 7th Edition (2020)** on 03/19/20, signed and sealed by Anthony Lynn Miller, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS


1. Notice of Acceptance No. **19-0305.02** issued to **Kuraray America, Inc.** for their “**Trosifol® Ultraclear, Clear and Color PVB Glass Interlayers**” dated 05/09/19, expiring on 07/08/24.
2. Notice of Acceptance No. **18-0725.11** issued to **Kuraray America, Inc.** for their “**Kuraray SentryGlas® Xtra™ (SGX™) Clear Glass Interlayer**” dated 05/23/19, expiring on 05/23/24.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 6th Edition (2017)** and the **FBC 7th Edition (2020)**, dated March 10, 2020, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
2. Statement letter of no financial interest, dated March 10, 2018, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
3. Proposal No. **19-1155 TP** issued by the Product Control Section, dated January 10, 2020, signed by Ishaq Chanda, P.E.

G. OTHERS

1. Notice of Acceptance No. **18-0430.05**, issued to PGT Industries, Inc. for their Series “**PW7720A**” Aluminum Fixed Window – L.M.I., approved on 08/23/18 and expiring on 02/19/24.

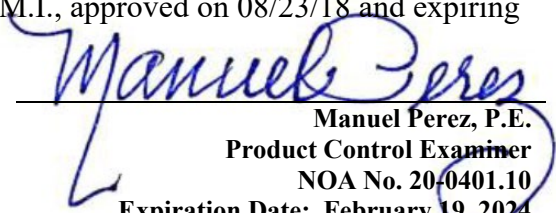

Manuel Perez, P.E.
Product Control Examiner
NOA No. 20-0401.10
Expiration Date: February 19, 2024
Approval Date: August 06, 2020

**GENERAL NOTES: SERIES PW7720A
IMPACT-RESISTANT FIXED WINDOW**

1) THIS PRODUCT HAS BEEN DESIGNED & TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).

2) SHUTTERS ARE NOT REQUIRED WHEN USED IN WIND-BORNE DEBRIS REGIONS. FOR INSULATED GLASS INSTALLATIONS ABOVE 30' IN THE HVHZ, THE OUTBOARD LITE (CAP) MUST TEMPERED.

3) FOR MASONRY APPLICATIONS IN MIAMI-DADE COUNTY, USE ONLY MIAMI-DADE COUNTY APPROVED MASONRY ANCHORS. MATERIALS USED FOR ANCHOR EVALUATIONS WERE SOUTHERN PINE, ASTM C90 CONCRETE MASONRY UNITS AND CONCRETE WITH MIN. KSI PER ANCHOR TYPE.

4) ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER, (EOR) OR ARCHITECT OF RECORD, (AOR).

5) ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO. USE ANCHORS OF SUFFICIENT EMBEDMENT. NARROW JOINT SEALANT IS USED ON ALL FOUR CORNERS OF THE FRAME. INSTALLATION ANCHORS SHOULD BE SEALED. OVERALL SEALING/FLASHING STRATEGY FOR WATER RESISTANCE OF INSTALLATION SHALL BE DONE BY OTHERS AND IS BEYOND THE SCOPE OF THESE INSTRUCTIONS.

6) MAX. 1/4" SHIMS ARE REQUIRED AT EACH ANCHOR LOCATION WHERE THE PRODUCT IS NOT FLUSH TO THE SUBSTRATE. USE SHIMS CAPABLE OF TRANSFERRING APPLIED LOADS. WOOD BUCKS, BY OTHERS, MUST BE SUFFICIENTLY ANCHORED TO RESIST LOADS IMPOSED ON THEM BY THE WINDOW.

7) DESIGN PRESSURES:
A. NEGATIVE DESIGN LOADS BASED ON STRUCTURAL/CYCLE TEST PRESSURE, FRAME ANALYSIS AND GLASS PER ASTM E1300.
B. POSITIVE DESIGN LOADS BASED ON WATER TEST PRESSURE, STRUCTURAL/ CYCLE TEST PRESSURE, FRAME ANALYSIS AND GLASS PER ASTM E1300.
C. DESIGN LOADS ARE BASED ON ALLOWABLE STRESS DESIGN, ASD.

8) THE ANCHORAGE METHODS SHOWN HAVE BEEN DESIGNED TO RESIST THE WINDLOADS CORRESPONDING TO THE REQUIRED DESIGN PRESSURE. THE 33-1/3% STRESS INCREASE HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT. THE 1.6 LOAD DURATION FACTOR WAS USED FOR THE EVALUATION OF ANCHORS INTO WOOD. ANCHORS THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FLORIDA BUILDING CODE FOR CORROSION RESISTANCE.


9) REFERENCES: TEST REPORTS FTL-3835, 3850, 7212 & 18-7763; ELCO ULTRACON NOA; DEWALT ULTRACON + NOA; DEWALT/ELCO CRETEFLEX NOA; ANSI/AF&PA NDS FOR WOOD CONSTRUCTION AND ALUMINUM DESIGN MANUAL.

10) THE 7720A SERIES WAS FORMERLY CALLED THE 720/820 SERIES.

CODES / STANDARDS USED:


- 2020 FLORIDA BUILDING CODE (FBC), 7TH EDITION
- 2017 FLORIDA BUILDING CODE (FBC), 6TH EDITION
- ASTM E1300-09
- ANSI/AF&PA NDS-2018 FOR WOOD CONSTRUCTION
- ALUMINUM DESIGN MANUAL, ADM-2015
- AISI S100-16
- AISC 360-16

THIS SYSTEM HAS BEEN TESTED TO MEET THE 400 FT-LB KINETIC ENERGY IMPACT LOADING REQUIREMENTS OF ANSI Z97.1 WHEN USING GLASS TYPES 6 OR 8.

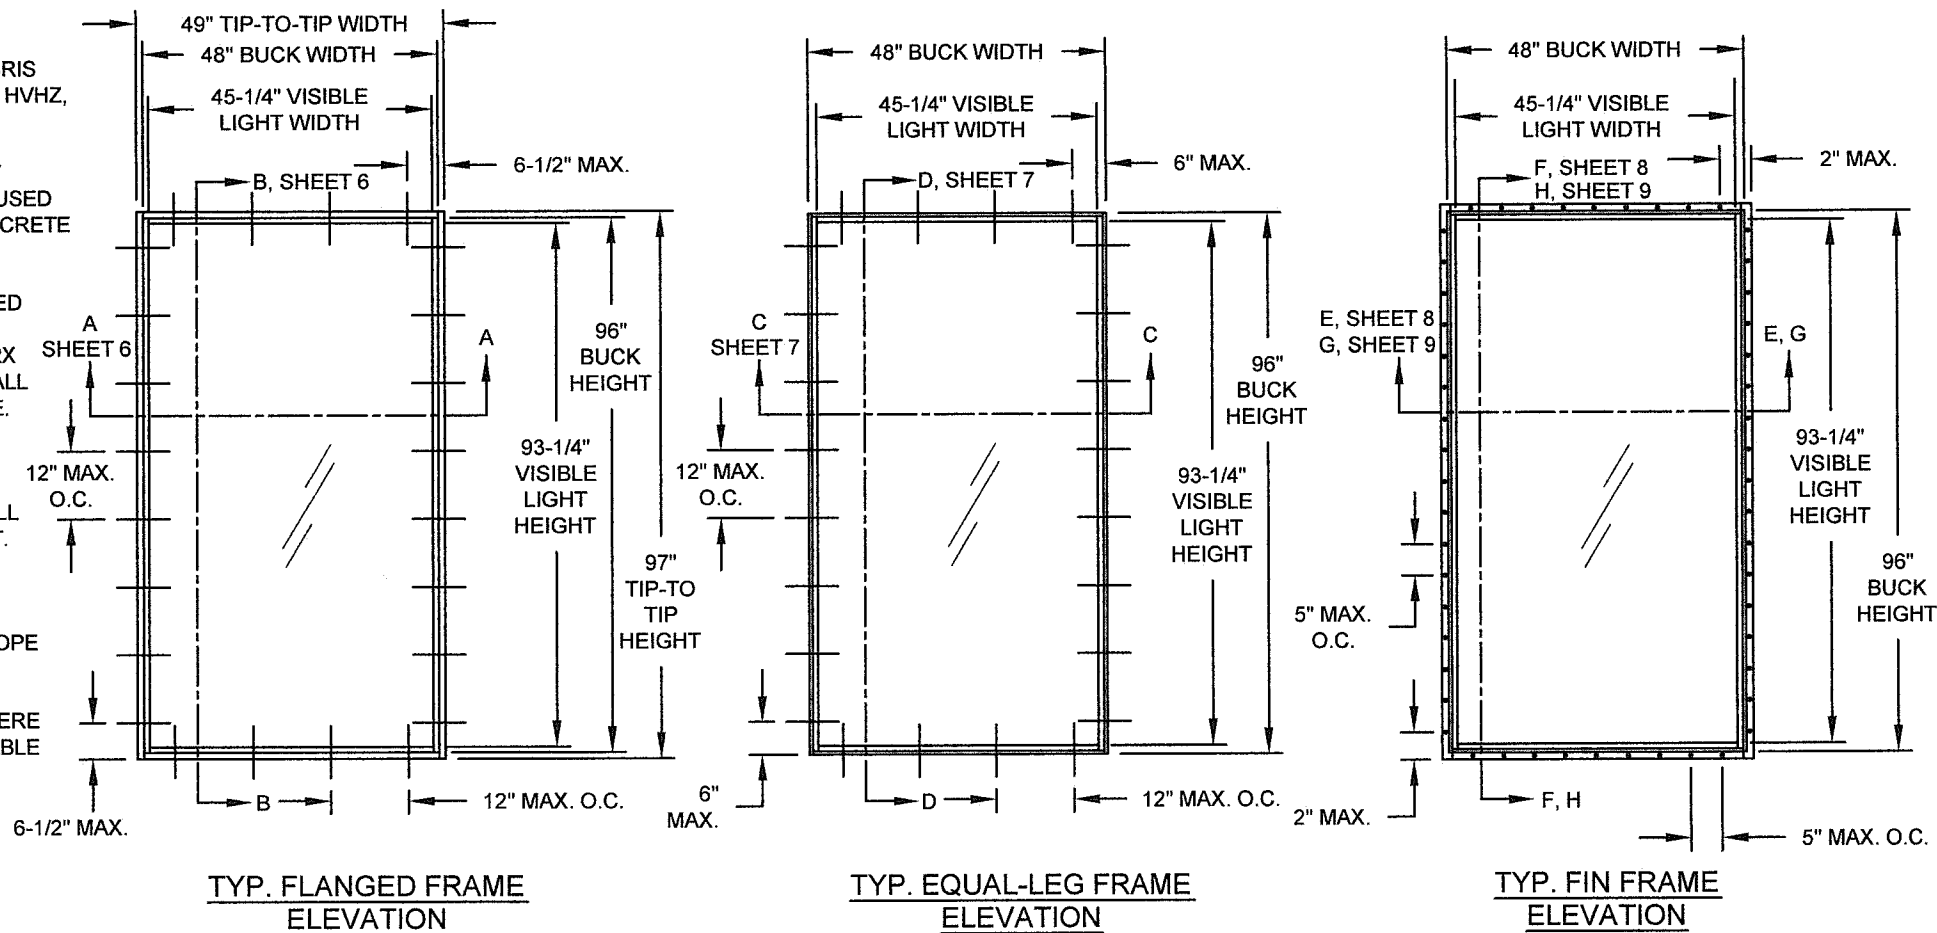

GUIDE TO SHEETS:

GENERAL NOTES.....	1
ELEVATIONS.....	1
GLAZING DETAILS.....	2-5
DESIGN PRESSURES.....	2-5
INSTALLATION, FLANGE.....	6
INSTALLATION, EQUAL-LEG.....	7
INSTALLATION, INT. FIN A.....	8
INSTALLATION, INT. FIN B.....	9
CORNER ASSEMBLY.....	10
EXTRUSION PROFILES.....	10
PARTS LIST.....	10

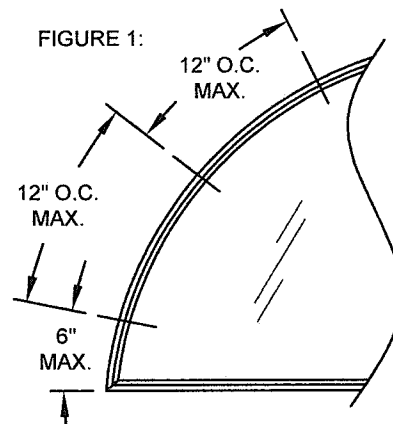

SHAPES AS SHOWN BELOW OR SIMILAR, MAY BE USED BY INSCRIBING THE SHAPE IN A BLOCK AND OBTAINING DESIGN PRESSURES FOR THAT BLOCK SIZE FROM THE TABLES ON SHEETS 2-5. ANCHOR SPACING TO BE 6" MAX. FROM CORNERS AND 12" O.C. MAX. FOR ALL CURVED FRAME MEMBERS, SEE FIGURE 1, THIS SHEET.

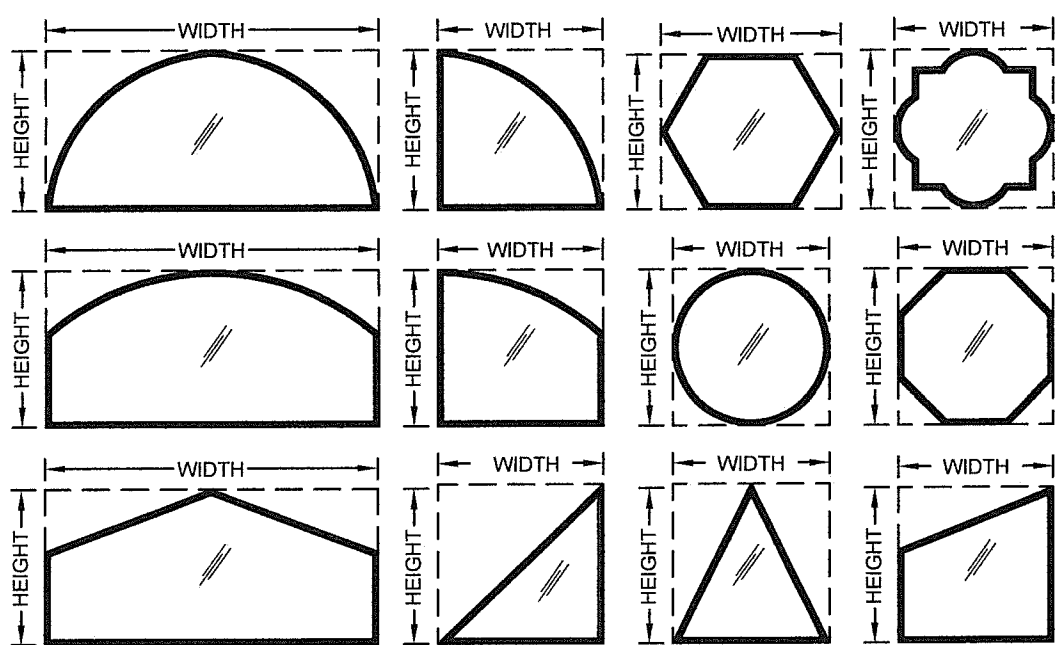


TABLE 1:

Type #	Description	Sheet #
1	7/16" Lami (3/16" An - .090" PVB - 3/16" HS)	2
2	7/16" Lami (3/16" HS - .090" PVB - 3/16" HS)	3
3	1-1/16" Lami. IG (3/16" T - 7/16" Air - 3/16" An - .090" PVB - 3/16" HS)	2
4	1-1/16" Lami. IG (3/16" T - 7/16" Air - 3/16" HS - .090" PVB - 3/16" HS)	3
5	7/16" Lami (3/16" An - .090" SG - 3/16" An)	4
6	7/16" Lami (3/16" HS - .090" SG - 3/16" HS)	5
7	1-1/16" Lami. IG (3/16" T - 7/16" Air - 3/16" An - .090" SG - 3/16" An)	4
8	1-1/16" Lami. IG (3/16" T - 7/16" Air - 3/16" HS - .090" SG - 3/16" HS)	5

"SG" = "KURARAY SENTRYGLAS® INTERLAYER" BY KURARAY AMERICA, INC.
"PVB" = "KURARAY TROSIFOL® PVB INTERLAYER" BY KURARAY AMERICA, INC.

DESIGN PRESSURE RATING	IMPACT RATING
VARIABLES, SEE SHEETS 2-5	LARGE & SMALL MISSILE IMPACT RESISTANCE

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. **20-0401.10**
Expiration Date: **02/19/2024**
By: *Manuel Perez*
Miami-Dade Product Control

Revision: E) UPDATED TO FBC 2020, REVISED ANCHOR TYPE TABLE.
JR - 03/11/20

1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
(941) 480-1600

REGISTRATION #29296

PGI

FIXED WINDOW INSTALLATION GUIDELINES 4/12/13
Date
J ROSOWSKI
Drawn By

GENERAL NOTES & ELEVATION
Series Desc. Title

MD-7720A.1
Rev. E

1 OF 10
No. DMG

NTS
Scale

PW7720A
Sheet

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/19/20
STATE OF FLORIDA
PROFESSIONAL ENGINEER
A. LYNN MILLER, P.E.
P.E.# 58705

TABLE 2:

		Window Design Pressure (+/-, psf) for Glass Type 1										
		Long Side, Tip to Tip (in)										
		68-7/8	73	77	81	85	89	93	97	101	105	110-1/2
Short Side, Tip to Tip (in)	31	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
	33	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
	35	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-79.8	+/-79.4
	37	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-79.7	+/-77.2	+/-75.1	+/-73.4	+/-72.2
	39	+/-80	+/-80	+/-80	+/-80	+/-80	+/-78.1	+/-75.2	+/-72.5	+/-70.3	+/-68.5	+/-66.3
	41	+/-80	+/-80	+/-80	+/-79.8	+/-77.2	+/-74.3	+/-71.3	+/-67.9	+/-65.1	+/-63.4	+/-61.6
	43	+/-80	+/-80	+/-80	+/-77.4	+/-74.3	+/-71.3	+/-68.2	+/-64.7	+/-61.6	+/-59.8	+/-58.2
	45	+/-80	+/-80	+/-78.9	+/-75.4	+/-72.1	+/-68.9	+/-65.6	+/-62.2	+/-59.7	+/-57.5	
	47	+/-80	+/-80	+/-77.2	+/-73.6	+/-70.1	+/-66.8	+/-63.5	+/-60.3	+/-57.7		
	49	+/-80	+/-79.3	+/-75.6	+/-71.9	+/-68.3	+/-64.9	+/-61.5	+/-58.2			
	51	+/-80	+/-77.5	+/-74.1	+/-70.3	+/-66.7	+/-63.1	+/-59.7				
	53	+/-79.1	+/-75.6	+/-72.4	+/-68.8	+/-65.1	+/-61.5					
	55	+/-77.4	+/-73.8	+/-70.5	+/-67.3	+/-63.5						
	57	+/-75.8	+/-72	+/-68.6	+/-65.3							
59	+/-74.2	+/-70.3	+/-66.8									
61	+/-72.7	+/-68.7	+/-65									
63	+/-71.2	+/-67.1										
65	+/-69.7	+/-65.5										
67	+/-68.3											
68-7/8	+/-67											

- 1) TIP-TO-TIP DIMENSIONS SHOWN. FOR INTEGRAL FIN AND EQUAL LEG WINDOWS, SUBTRACT 1" FROM THE TIP-TO-TIP DIMENSION IN THE TABLE TO DETERMINE THE WINDOW SIZE.
- 2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG DIMENSION.
- 3) FOR ARCHITECTURAL WINDOWS, FIND THE SMALLEST WINDOW SIZE IN THE TABLE ABOVE WHICH THE OVERALL DIMENSIONS COMPLETELY FIT WITHIN.

TABLE 3:

		Window Design Pressure (+/-, psf) for Glass Type 3										
		Long Side, Tip to Tip (in)										
		68-7/8	73	77	81	85	89	93	97	101	105	110-1/2
Short Side, Tip to Tip (in)	31	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
	33	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
	35	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
	37	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
	39	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-79.4	+/-76.4	+/-74.3
	41	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-76.7	+/-73.5	+/-70.9	+/-69
	43	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-77	+/-73.1	+/-69.6	+/-66.9	+/-65.2
	45	+/-80	+/-80	+/-80	+/-80	+/-80	+/-77.8	+/-74.1	+/-70.3	+/-67.5	+/-63.9	
	47	+/-80	+/-80	+/-80	+/-80	+/-79.2	+/-75.4	+/-71.7	+/-68.1	+/-65.1		
	49	+/-80	+/-80	+/-80	+/-80	+/-77.2	+/-73.3	+/-69.5	+/-65.8			
	51	+/-80	+/-80	+/-80	+/-79.4	+/-75.3	+/-71.3	+/-67.5				
	53	+/-80	+/-80	+/-80	+/-77.7	+/-73.5	+/-69.5					
	55	+/-80	+/-80	+/-79.6	+/-76	+/-71.8						
	57	+/-80	+/-80	+/-77.5	+/-73.8							
59	+/-80	+/-79.4	+/-75.4									
61	+/-80	+/-77.6	+/-73.5									
63	+/-80	+/-75.8										
65	+/-78.8	+/-74										
67	+/-77.2											
68-7/8	+/-74.9											

- 1) TIP-TO-TIP DIMENSIONS SHOWN. FOR INTEGRAL FIN AND EQUAL LEG WINDOWS, SUBTRACT 1" FROM THE TIP-TO-TIP DIMENSION IN THE TABLE TO DETERMINE THE WINDOW SIZE.
- 2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG DIMENSION.
- 3) FOR ARCHITECTURAL WINDOWS, FIND THE SMALLEST WINDOW SIZE IN THE TABLE ABOVE WHICH THE OVERALL DIMENSIONS COMPLETELY FIT WITHIN.

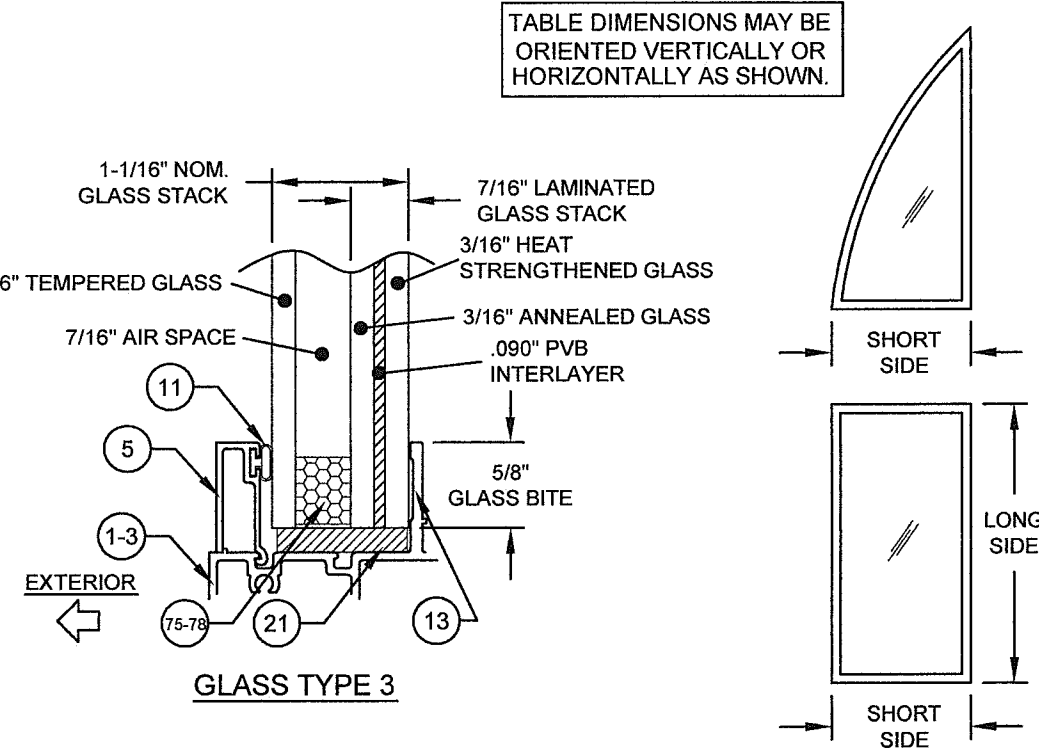
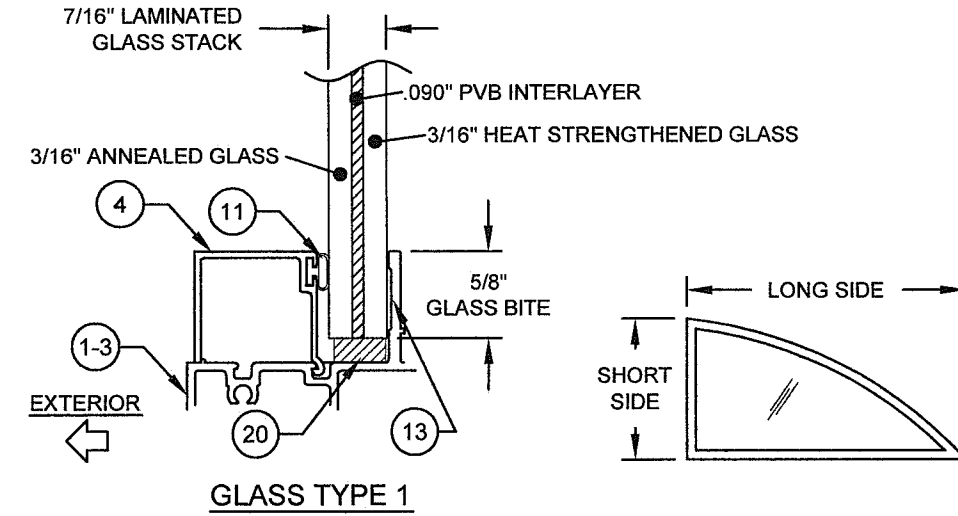


TABLE DIMENSIONS MAY BE ORIENTED VERTICALLY OR HORIZONTALLY AS SHOWN.

PRODUCT REVISED
 as complying with the Florida Building Code
NOA-No. 20-0401.10
Expiration Date: 02/19/2024
 By: *Manuel Perez*
Miami-Dade Product Control

Revision: E) NO CHANGES THIS SHEET.
 JR - 03/11/20

1070 TECHNOLOGY DRIVE
 N. VENICE, FL 34275
 (941) 480-1600

REGISTRATION #29296

FIXED WINDOW INSTALLATION GUIDELINES
 DESIGN PRESSURE TABLES 1




DATE: 4/12/13
 DRAWN BY: J ROSOWSKI
 NO. DWG: MD-7720A.1
 SHEET: 2 OF 10
 SCALE: NTS
 SERIES: PW7720A

ANTHONY LYNN MILLER
 LICENSE
 No. 58705
 3/19/20
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER
 A. LYNN MILLER, P.E.
 P.E.# 58705

TABLE 4:

		Window Design Pressure (+/-, psf) for Glass Types 2 & 4																			
		Long Side, Tip to Tip (in)																			
Short Side, Tip to Tip (in)		68-7/8	73	77	81	85	89	93	97	101	105	110-1/2	113	117	121	125	129	133	137	141	145
31	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
33	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
35	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
37	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
39	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80
41	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80								
43	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80									
45	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80										
47	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80											
49	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80												
51	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80	+/-80													
53	+/-80	+/-80	+/-80	+/-80	+/-80	+/-79.1															
55	+/-80	+/-80	+/-80	+/-80	+/-78.6																
57	+/-80	+/-80	+/-80	+/-79.1																	
59	+/-80	+/-80	+/-80																		
61	+/-80	+/-80	+/-79.3																		
63	+/-80	+/-80																			
65	+/-80	+/-80																			
67	+/-80																				
68-7/8	+/-80																				

- 1) TIP-TO-TIP DIMENSIONS SHOWN. FOR INTEGRAL FIN AND EQUAL LEG WINDOWS, SUBTRACT 1" FROM THE TIP-TO-TIP DIMENSION IN THE TABLE TO DETERMINE THE WINDOW SIZE.
- 2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG DIMENSION.
- 3) FOR ARCHITECTURAL WINDOWS, FIND THE SMALLEST WINDOW SIZE IN THE TABLE ABOVE WHICH THE OVERALL DIMENSIONS COMPLETELY FIT WITHIN.

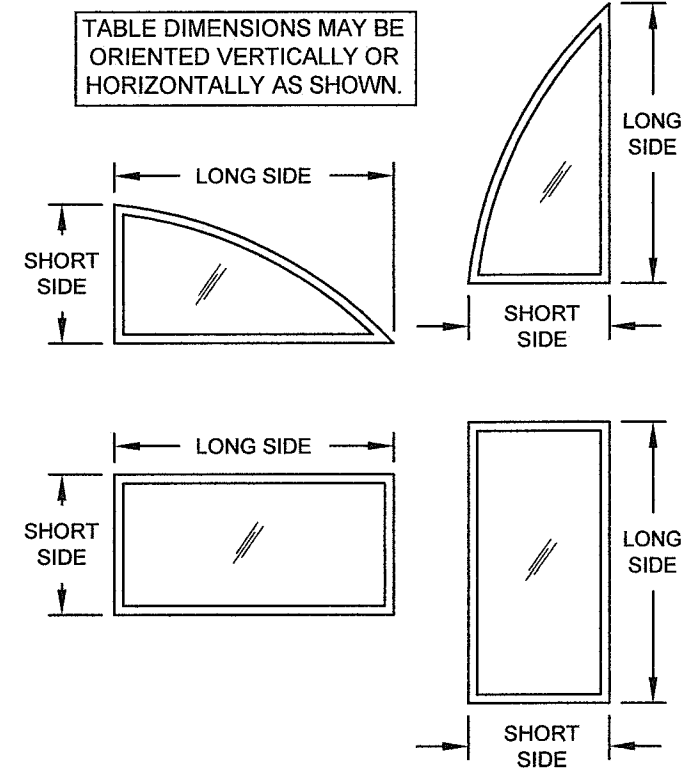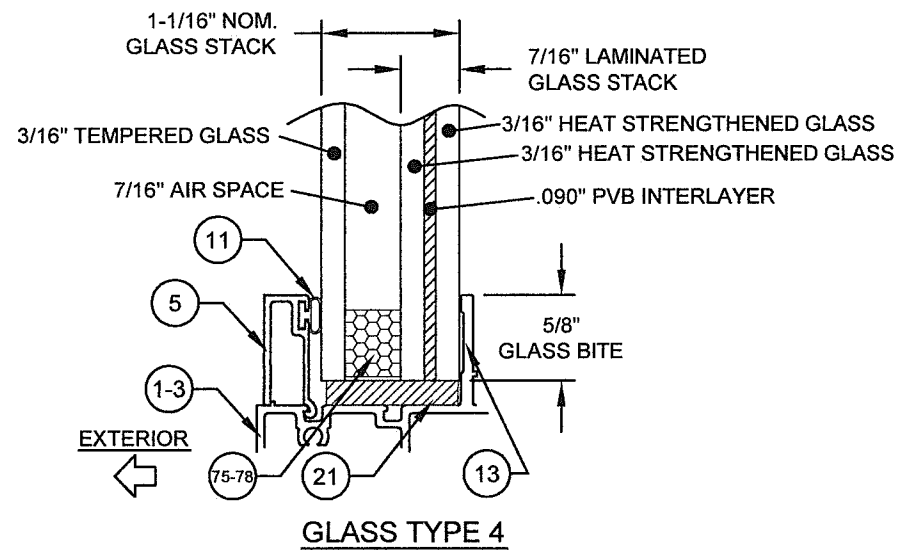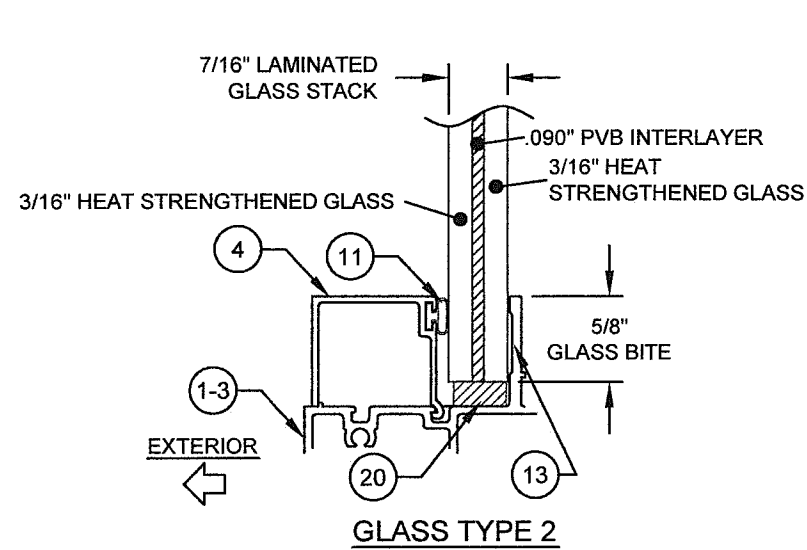

PRODUCT REVISED
 as complying with the Florida Building Code
 NOA-No. **20-0401.10**
 Expiration Date: **02/19/2024**
 By: *Manuel Torres*
 Miami-Dade Product Control

Revision: E) NO CHANGES THIS SHEET.
 JR - 03/11/20

1070 TECHNOLOGY DRIVE
 N. VENICE, FL 34275
 (941) 480-1600

REGISTRATION #29296

FIXED WINDOW INSTALLATION GUIDELINES
 DESIGN PRESSURE TABLES 2
 PW7720A

Drawn By: J ROSOWSKI
 Date: 4/12/13

Sheet: 3 OF 10
 Title: NTS
 DWG No.: MD-7720A.1
 Rev.: E

ANTHONY LYNN MILLER
 LICENSE
 No. 58705
A. Lynn Miller
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER
 A. LYNN MILLER, P.E.
 P.E.# 58705

TABLE 5:

		Window Design Pressure (+/-, psf) for Glass Type 5												
		Long Side, Tip to Tip (in)												
		68-7/8	73	77	78-3/4	81	85	89	93	97	101	105	109	110-1/2
Short Side, Tip to Tip (in)	37	+90/-130	+90/-127.5	+90/-123.5	+90/-121.7	+90/-119.8	+90/-116.5	+90/-113.5	+90/-111	+90/-108.5	+90/-106.3	+90/-104.5	+90/-104.5	+90/-104.5
	39	+90/-126.1	+90/-120	+90/-114.5	+90/-112.9	+90/-111	+90/-107.5	+90/-104.5	+90/-101.7	+90/-99.5	+90/-97.7	+90/-96.1	+90/-94.6	+90/-94.1
	41	+90/-120.1	+90/-113.5	+90/-107.3	+90/-105.2	+90/-103	+90/-100.5	+90/-97.8	+90/-94.9	+90/-92	+/-89.6	+/-88	+/-86.5	+/-86
	43	+90/-114.4	+90/-107.5	+90/-102.5	+90/-100.7	+90/-98.6	+90/-95.2	+90/-92.2	+/-89.1	+/-85.8	+/-83	+/-81.4	+/-80.4	+/-80.1
	45	+90/-108.7	+90/-102.5	+90/-98.8	+90/-97.1	+90/-94.9	+90/-91	+/-87.3	+/-84.1	+/-81.7	+/-79.7	+/-77.8	+/-76.1	+/-75.6
	47	+90/-104.4	+90/-99.8	+90/-95.7	+90/-93.9	+90/-91.6	+/-87.5	+/-83.6	+/-81	+/-78.9	+/-76.7	+/-74.7	+/-72.7	+/-72
	49	+90/-101.1	+90/-97	+90/-92.8	+90/-90.9	+/-88.5	+/-84.3	+/-81.2	+/-78.5	+/-76.1	+/-73.9	+/-71.7	+/-69.6	+/-68.9
	51	+90/-98.1	+90/-94.1	+90/-90.1	+/-88.2	+/-85.7	+/-82	+/-79.1	+/-76.3	+/-73.6	+/-71.2	+/-68.9	+/-66.8	+/-65.9
	53	+90/-95.3	+90/-91.1	+/-87.4	+/-85.6	+/-83.3	+/-80	+/-77	+/-74.1	+/-71.3	+/-68.7	+/-66.3	+/-64	+/-63.2
	55	+90/-92.5	+/-88.2	+/-84.3	+/-82.9	+/-81.4	+/-78.1	+/-74.9	+/-71.9	+/-69.1	+/-66.4	+/-63.9	+/-61.8	+/-61.2
	57	+/-89.8	+/-85.3	+/-81.8	+/-80.6	+/-79	+/-76.2	+/-73	+/-69.9	+/-66.9	+/-64.1	+/-61.9	+/-60.1	
	59	+/-87.1	+/-82.8	+/-79.7	+/-78.4	+/-76.8	+/-74	+/-71.1	+/-67.9	+/-64.8	+/-62.2	+/-60.3		
	61	+/-84.6	+/-80.8	+/-77.6	+/-76.2	+/-74.6	+/-71.7	+/-69	+/-65.9	+/-62.8	+/-60.8			
	63	+/-82.5	+/-78.9	+/-74.6	+/-73.2	+/-71.4	+/-68.4	+/-65.5	+/-62.9	+/-60.9				
	65	+/-80.7	+/-77	+/-73.6	+/-72.2	+/-70.4	+/-67.3	+/-64.4	+/-62					
67	+/-79	+/-75.3	+/-71.7	+/-70.2	+/-68.4	+/-65.2	+/-62.4							
68-7/8	+/-77.3	+/-73.6	+/-70	+/-68.5	+/-66.6	+/-63.3	+/-61.1							
73	+/-73.6	+/-70.2	+/-66.5	+/-64.8	+/-62.9	+/-60.5								
77	+/-70	+/-66.5	+/-63.2	+/-61.9										
78-3/4	+/-68.5	+/-64.8	+/-61.9	+/-60.9										

- 1) TIP-TO-TIP DIMENSIONS SHOWN. FOR INTEGRAL FIN AND EQUAL LEG WINDOWS, SUBTRACT 1" FROM THE TIP-TO-TIP DIMENSION IN THE TABLE TO DETERMINE THE WINDOW SIZE.
- 2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG DIMENSION.
- 3) FOR ARCHITECTURAL WINDOWS, FIND THE SMALLEST WINDOW SIZE IN THE TABLE ABOVE WHICH THE OVERALL DIMENSIONS COMPLETELY FIT WITHIN.

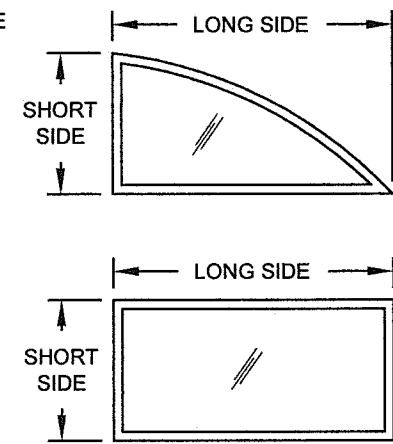
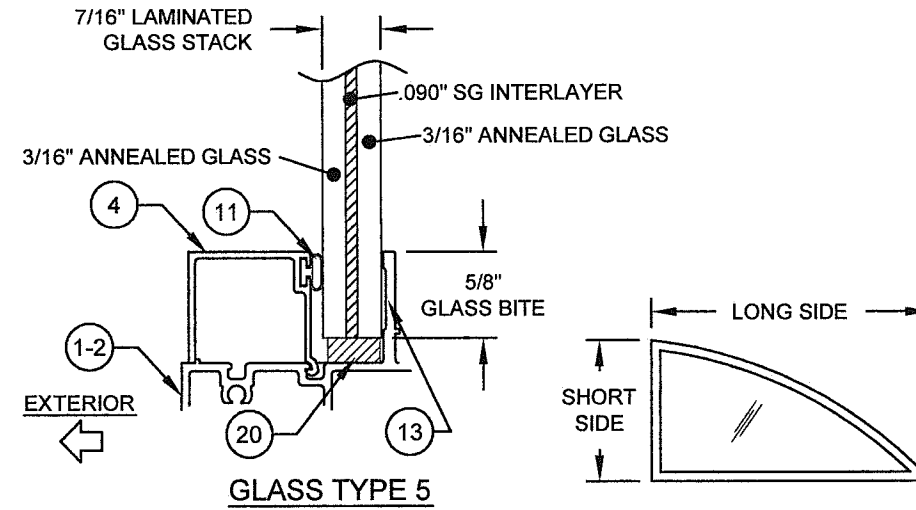


TABLE DIMENSIONS MAY BE ORIENTED VERTICALLY OR HORIZONTALLY AS SHOWN.

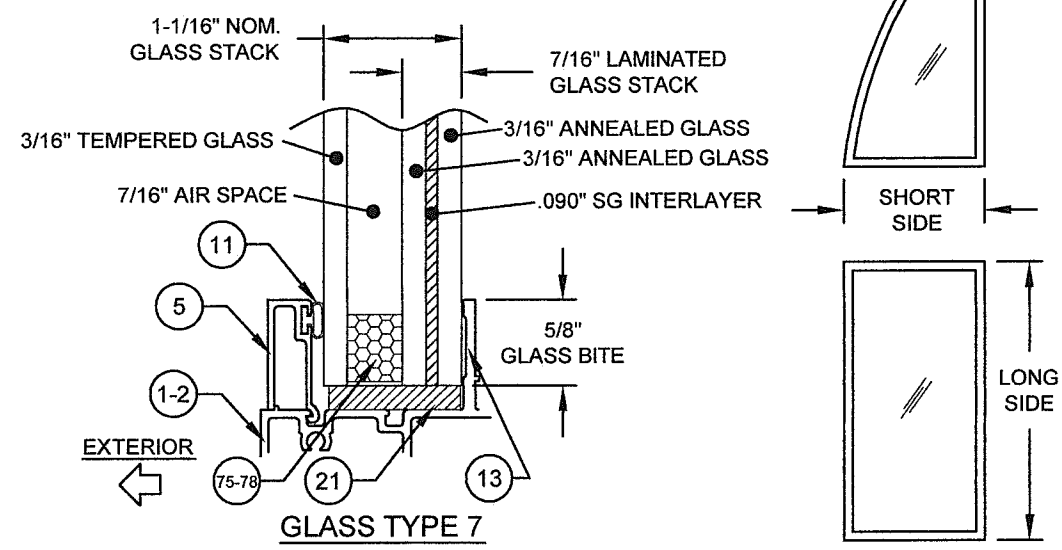


TABLE 6:

		Window Design Pressure (+/-, psf) for Glass Type 7												
		Long Side (in)												
		68-7/8	73	77	78-3/4	81	85	89	93	97	101	105	109	110-1/2
Short Side (in)	31	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
	33	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
	35	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
	37	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-128.3	+90/-125.4	+90/-122.6	+90/-120.1	+90/-118.1	+90/-118.1	+90/-118.1
	39	+90/-130	+90/-130	+90/-129.4	+90/-127.5	+90/-125.4	+90/-121.5	+90/-118.1	+90/-114.9	+90/-112.5	+90/-110.4	+90/-108.6	+90/-106.9	+90/-106.3
	41	+90/-130	+90/-128.3	+90/-121.2	+90/-118.9	+90/-116.4	+90/-113.6	+90/-110.5	+90/-107.2	+90/-103.9	+90/-101.3	+90/-99.4	+90/-97.7	+90/-97.1
	43	+90/-129.3	+90/-121.5	+90/-115.8	+90/-113.8	+90/-111.4	+90/-107.5	+90/-104.2	+90/-100.6	+90/-97	+90/-93.8	+90/-92	+90/-90.9	+90/-90.5
	45	+90/-122.9	+90/-115.8	+90/-111.6	+90/-109.7	+90/-107.3	+90/-102.8	+90/-98.7	+90/-95	+90/-92.3	+90/-90.1	+/-87.9	+80/-85.9	+80/-85.4
	47	+90/-118	+90/-112.7	+90/-108.1	+90/-106.1	+90/-103.5	+90/-98.8	+90/-94.4	+90/-91.5	+/-89.1	+/-86.7	+80/-84.4	+80/-82.1	+80/-81.3
	49	+90/-114.2	+90/-109.6	+90/-104.8	+90/-102.7	+90/-100	+90/-95.3	+90/-91.8	+/-88.7	+/-86	+80/-83.5	+80/-81	+/-78.7	+/-77.8
	51	+90/-110.9	+90/-106.3	+90/-101.8	+90/-99.6	+90/-96.9	+90/-92.7	+/-89.3	+/-86.2	+80/-83.2	+80/-80.5	+/-77.9	+/-75.4	+/-74.5
	53	+90/-107.7	+90/-102.9	+90/-98.7	+90/-96.7	+90/-94.1	+90/-90.4	+/-87	+80/-83.7	+80/-80.6	+/-77.7	+/-74.9	+/-72.3	+/-71.4
	55	+90/-104.5	+90/-99.6	+90/-95.3	+90/-93.7	+90/-91.9	+/-88.3	+80/-84.6	+80/-81.3	+/-78.1	+/-75.1	+/-72.2	+/-69.8	+/-69.1
	57	+90/-101.5	+90/-96.4	+90/-92.5	+90/-91	+/-89.3	+80/-86.1	+80/-82.4	+/-78.9	+/-75.6	+/-72.5	+/-69.9	+/-67.9	
	59	+90/-98.5	+90/-93.5	+/-90	+/-88.5	+80/-86.8	+80/-83.6	+80/-80.3	+/-76.7	+/-73.3	+/-70.3	+/-68.2		
61	+90/-95.6	+90/-91.3	+/-87.7	+80/-86.2	+80/-84.3	+80/-81	+/-77.9	+/-74.5	+/-71	+/-68.7				
63	+90/-92.2	+/-88.1	+80/-84.3	+80/-82.7	+80/-80.7	+/-77.3	+/-74	+/-71	+/-68.8					
65	+90/-91.2	+/-87	+80/-83.2	+80/-81.6	+80/-80.7	+/-76.1	+/-72.8	+/-70						
67	+/-89.3	+80/-85	+80/-81	+/-79.4	+/-77.3	+/-73.7	+/-70.5							
68-7/8	+/-87.3	+80/-83.2	+/-79.1	+/-77.4	+/-75.2	+/-71.6	+/-69							
73	+80/-83.2	+/-79.4	+/-75.1	+/-73.2	+/-71	+/-68.4								
77	+/-79.1	+/-75.1	+/-71.4	+/-69.9										
78-3/4	+/-77.4	+/-73.2	+/-69.9	+/-68.8										

- 1) TIP-TO-TIP DIMENSIONS SHOWN. FOR INTEGRAL FIN AND EQUAL LEG WINDOWS, SUBTRACT 1" FROM THE TIP-TO-TIP DIMENSION IN THE TABLE TO DETERMINE THE WINDOW SIZE.
- 2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG DIMENSION.
- 3) FOR ARCHITECTURAL WINDOWS, FIND THE SMALLEST WINDOW SIZE IN THE TABLE ABOVE WHICH THE OVERALL DIMENSIONS COMPLETELY FIT WITHIN.

PRODUCT REVISED
 as complying with the Florida Building Code
NOA-No. 20-0401.10
 Expiration Date: **02/19/2024**
 By: *Manuel Perez*
 Miami-Dade Product Control

Revision: E) NO CHANGES THIS SHEET.
 JR - 03/11/20


1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941) 480-1600	Date	4/12/13	Rev	E	
	Drawn By	J ROSOWSKI		DWC	MD-7720A.1
	Sheet	DESIGN PRESSURE TABLES 3			4 OF 10
	Scale	PW7720A		NTS	

REGISTRATION #29296
 ANTHONY LYNN MILLER
 LICENSE
 No. 58705
 3/19/20
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER
 A. LYNN MILLER, P.E.
 P.E.# 58705

TABLE 7:

		Window Design Pressure (+/-, psf) for Glass Types 6 & 8																				
		Long Side, Tip to Tip (in)																				
Short Side, Tip to Tip (in)		68-7/8	73	77	78-3/4	81	85	89	93	97	101	105	109	110-1/2	113	117	121	125	129	137	145	
31	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
33	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
35	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
37	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
39	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
41	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
43	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
45	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
47	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
49	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
51	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
53	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
55	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
57	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
59	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
61	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
63	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
65	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
67	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
68-7/8	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+80/-110	+80/-110
73	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110
77	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110
78-3/4	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110	+80/-110

- 1) TIP-TO-TIP DIMENSIONS SHOWN. FOR INTEGRAL FIN AND EQUAL LEG WINDOWS, SUBTRACT 1" FROM THE TIP-TO-TIP DIMENSION IN THE TABLE TO DETERMINE THE WINDOW SIZE.
- 2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG DIMENSION.
- 3) FOR ARCHITECTURAL WINDOWS, FIND THE SMALLEST WINDOW SIZE IN THE TABLE ABOVE WHICH THE OVERALL DIMENSIONS COMPLETELY FIT WITHIN.

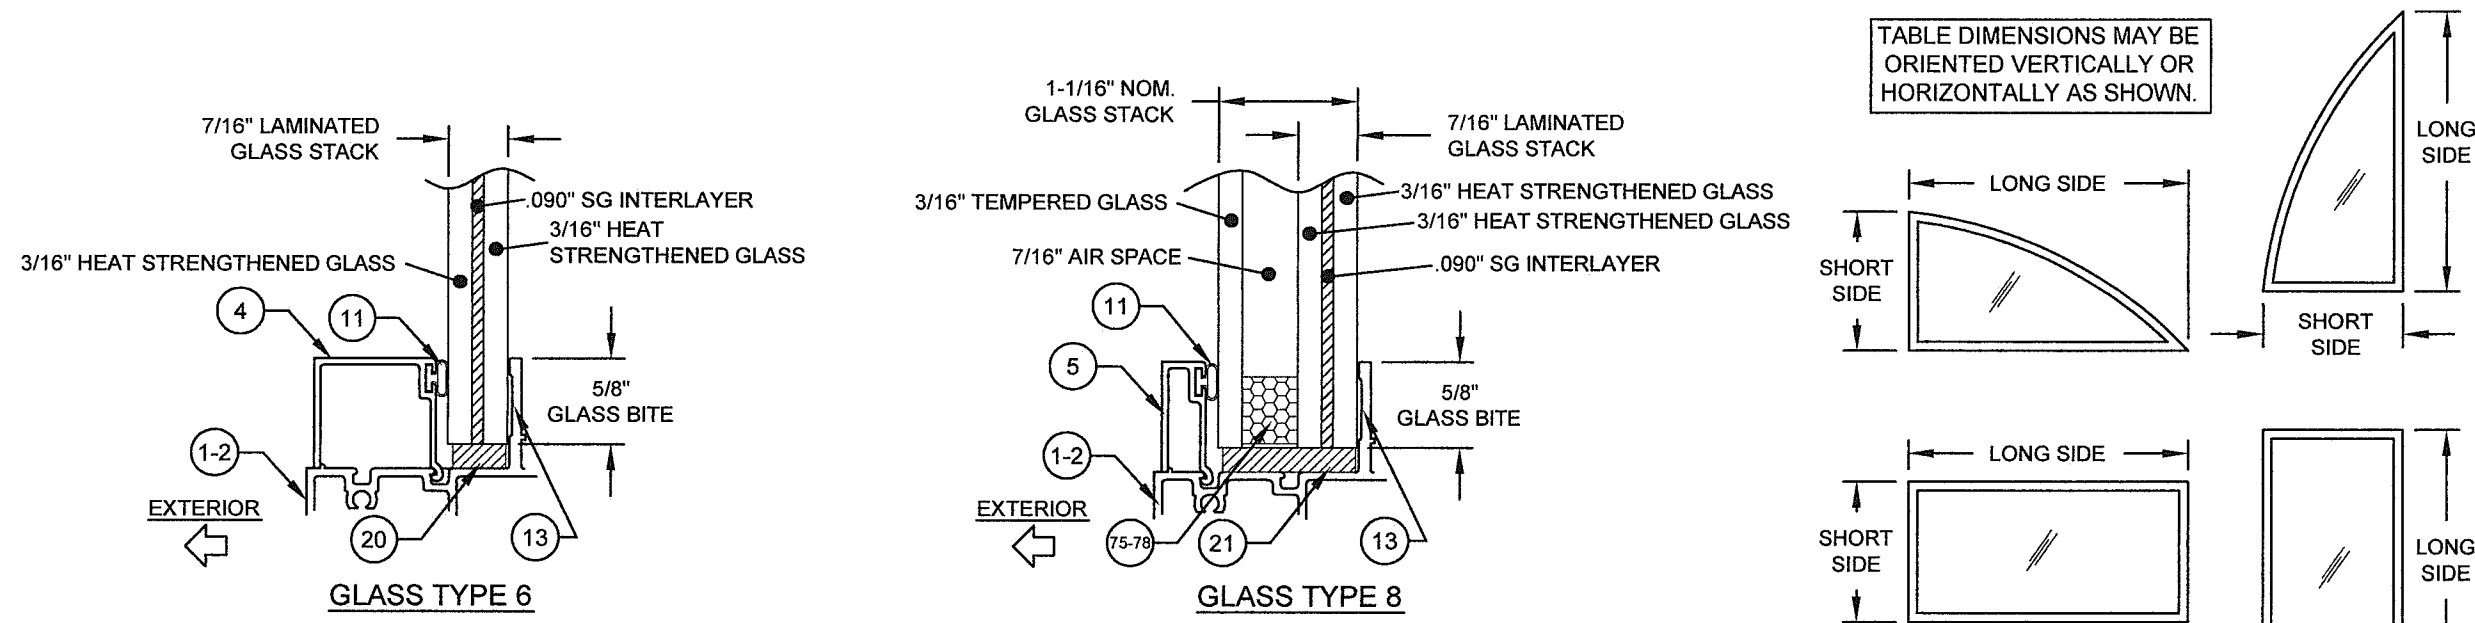


PRODUCT REVISED
 as complying with the Florida Building Code
 NOA-No. **20-0401.10**
 Expiration Date: **02/19/2024**
 By: *Manuel Perez*
 Miami-Dade Product Control


Revision: E) NO CHANGES THIS SHEET.
 JR - 03/11/20

1070 TECHNOLOGY DRIVE N. VENICE, FL 34275 (941) 480-1600	Date	4/12/13	Rev.	E
	By	J ROSOWSKI	DWG No.	MD-7720A.1
	Drawn	J ROSOWSKI	Scale	NTS
	Series	PW7720A	Sheet	5 OF 10
FIXED WINDOW INSTALLATION GUIDELINES		DESIGN PRESSURE TABLES 4		


REGISTRATION #29296
 ANTHONY LYNN MILLER
 LICENSE
 No. 58705
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER
 A. LYNN MILLER, P.E.
 P.E.# 58705

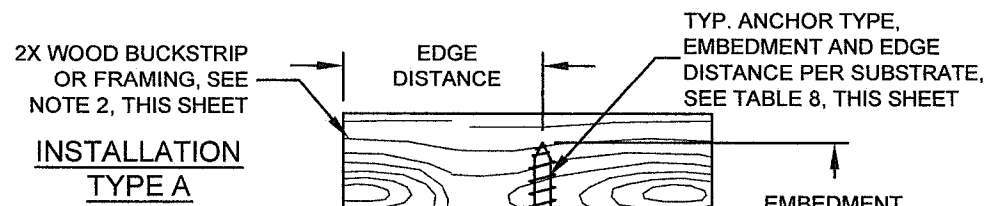


INSTALLATION TYPE C

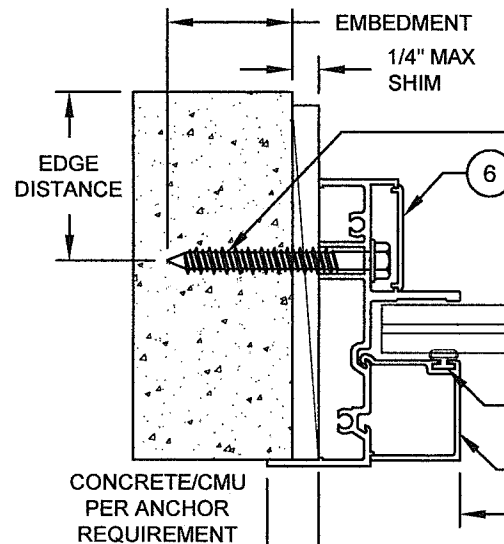

INSTALLATION TYPE B

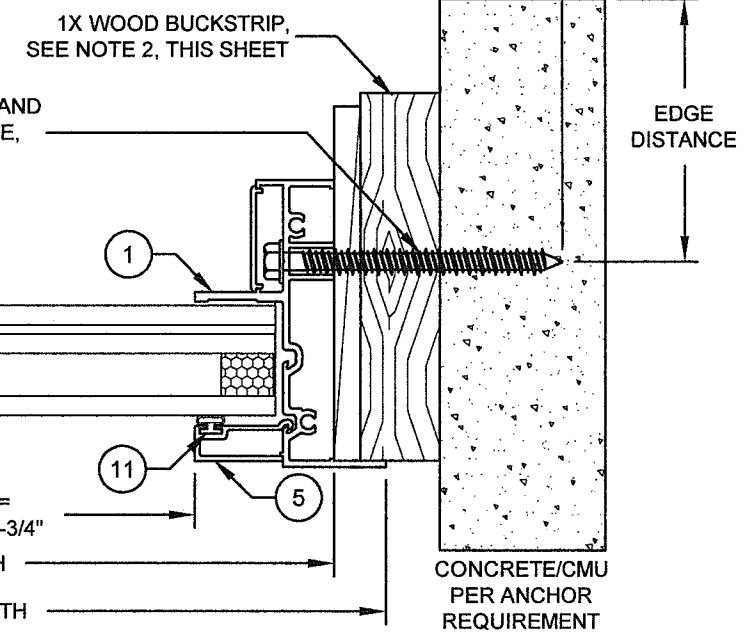

HORIZONTAL SECTION A-A

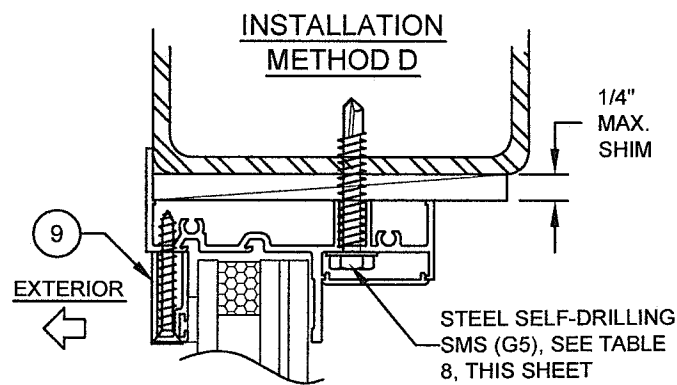

MIAMI-DADE APPROVED MULLION (SEE SEPERATE NOA), ALUMINUM, STEEL FRAMING OR STEEL STUD. SEE SUBSTRATE PROPERTIES, TABLE 8, THIS SHEET

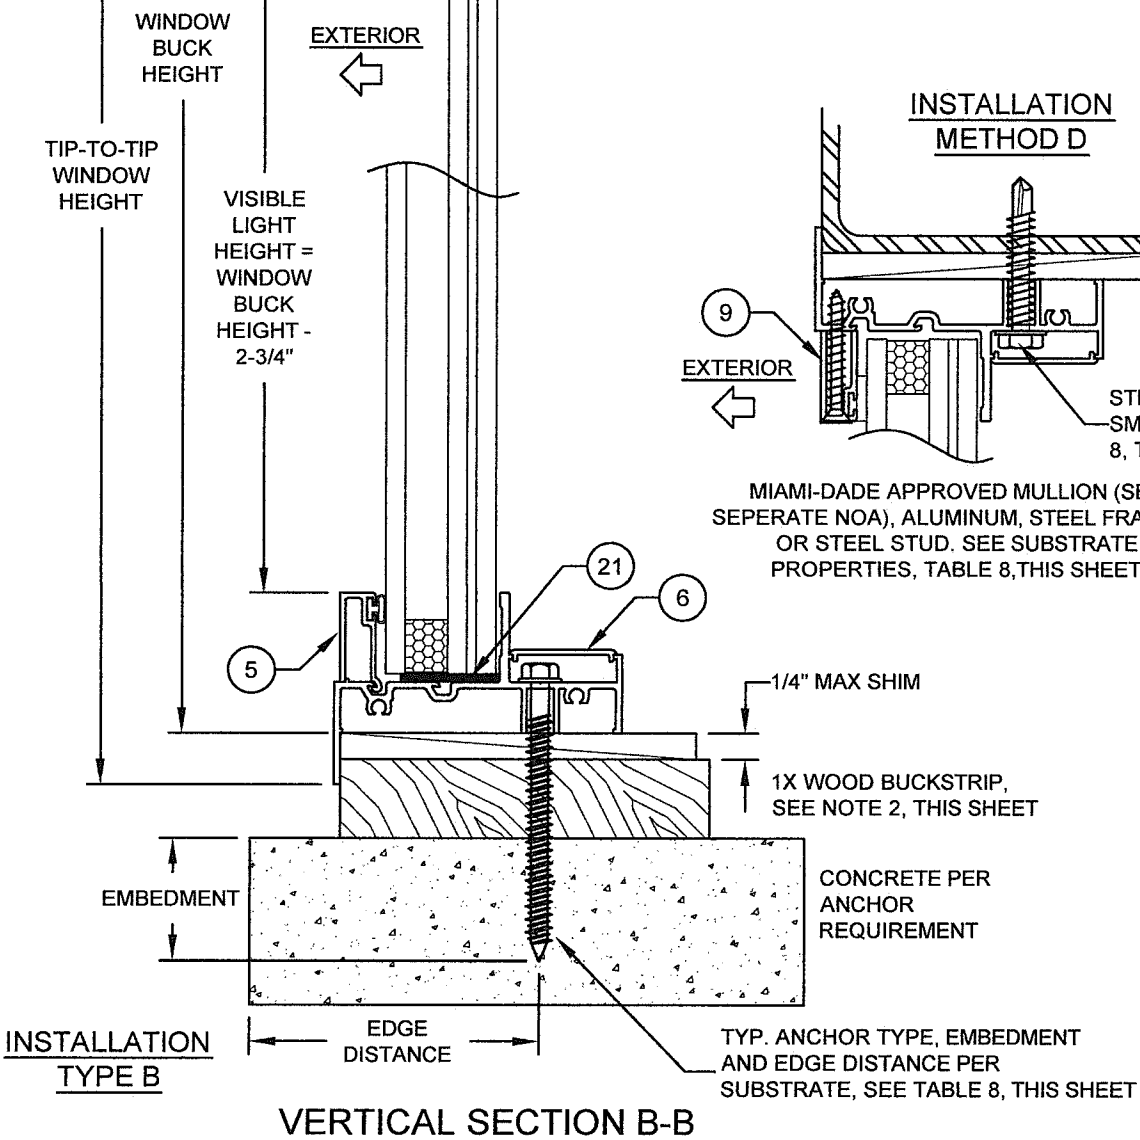


TABLE 8:

Anchor	Substrate	Min. Edge Distance	Min. Embedment	Max O.C. Spacing
#12 or #14 410 SS Screw	Southern Pine (SG=0.55)	9/16"	1-3/8"	12"
	Aluminum, 6063-T5 min.	3/8"	0.063" *	12"
	A36 Steel	3/8"	0.063" *	12"
#12 or #14 Steel Screw (G5)	Steel Stud, Gr. 33 min.	3/8"	0.045" (18 Ga) *	12"
	Southern Pine (SG=0.55)	9/16"	1-3/8"	12"
	Aluminum, 6063-T5 min.	3/8"	0.063" *	12"
1/4" 410 SS CreteFlex	A36 Steel	3/8"	0.063" *	12"
	Steel Stud, Gr. 33 min.	3/8"	0.045" (18 Ga) *	12"
	UngROUTED CMU, (ASTM C-90)	2-1/2"	1-1/4"	12"
1/4" Steel Ultracon	Concrete (min. 3.35 ksi)	1"	1-3/4"	12"
	Concrete (min. 2.85 ksi)	1"	1-3/4"	12"
	UngROUTED CMU, (ASTM C-90)	2-1/2"	1-1/4"	12"
1/4" Steel Ultracon +	Concrete (min. 3 ksi)	1-3/16"	1-3/8"	12"
	UngROUTED CMU, (ASTM C-90)	1-1/2"	1-1/4"	12"
	Grouted CMU, (ASTM C-90)	2-1/2"	1-3/4"	12"
5/16" Steel Ultracon	Concrete (min. 3.5 ksi)	1-1/4"	1-3/4"	12"
	Grouted CMU, (ASTM C-90)	2-1/2"	1-3/4"	12"

* MIN. OF 3 THREADS BEYOND THE METAL SUBSTRATE.
 "UNGROUTED CMU" VALUES MAY BE USED FOR GROUTED CMU APPLICATIONS.
 ALL HEAD TYPES APPLICABLE.

INSTALLATION NOTES:

1. USE ONLY ANCHORS LISTED ON THIS SHEET. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS.
2. WOOD BUCKS DEPICTED ON THIS SHEET AS "1X", ARE BUCKS WHOSE TOTAL THICKNESS IS LESS THAN 1-1/2". 1X WOOD BUCKS ARE OPTIONAL IF UNIT CAN BE INSTALLED DIRECTLY TO SOLID CONCRETE. WOOD BUCKS DEPICTED AS "2X" ARE 1-1/2" THICK OR GREATER. INSTALLATION TO THE SUBSTRATE OF WOOD BUCKS TO BE ENGINEERED BY OTHERS OR AS APPROVED BY AUTHORITY HAVING JURISDICTION.
3. FOR ATTACHMENT TO METAL: THE STRUCTURAL MEMBER SHALL BE OF A SIZE TO PROVIDE FULL SUPPORT TO THE WINDOW FRAME.
4. IF APPLICABLE, LOWER DESIGN PRESSURE FROM EITHER WINDOW OR MULLION NOA APPLIES TO WHOLE SYSTEM.

Material	Min. F _y	Min. F _u
Steel Screw	92 ksi	120 ksi
410 Screw	90 ksi	110 ksi
Elco UltraCon®	155 ksi	177 ksi
1/4" DeWalt UltraCon+®	148 ksi	164 ksi
410 SS Elco/Dewalt CreteFlex®	127.4 ksi	189.7 ksi
6063-T5 Aluminum	16 ksi	22 ksi
A36 Steel	36 ksi	58 ksi
Gr. 33 Steel Stud	33 ksi	45 ksi

PRODUCT REVISED
 as complying with the Florida Building Code
 NOA-No. **20-0401.10**
 Expiration Date: **02/19/2024**
 By: *Manuel Perez*
 Miami-Dade Product Control

Revision: E) REVISED ANCHOR TYPE TABLE, UPDATED MATERIAL PROP. TABLE.
 JR - 03/11/20

1070 TECHNOLOGY DRIVE
 N. VENICE, FL 34275
 (941) 480-1600

REGISTRATION #29296

FIXED WINDOW INSTALLATION GUIDELINES
 FLANGE INSTALLATION

Date: 4/12/13
 Drawn By: J ROSOWSKI
 DWG No.: MD-7720A.1
 Sheet: 6 OF 10
 Scale: NTS
 Series: PW7720A

ANTHONY LYNN MILLER
 LICENSE
 No. 58705
 3/19/20
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.
 P.E.# 58705

2X WOOD BUCKSTRIP OR FRAMING, SEE NOTE 2, THIS SHEET


EDGE DISTANCE

EMBEDMENT


1/4" MAX SHIM

TYP. ANCHOR TYPE, EMBEDMENT AND EDGE DISTANCE PER SUBSTRATE, SEE TABLE 9, THIS SHEET


INSTALLATION TYPE E

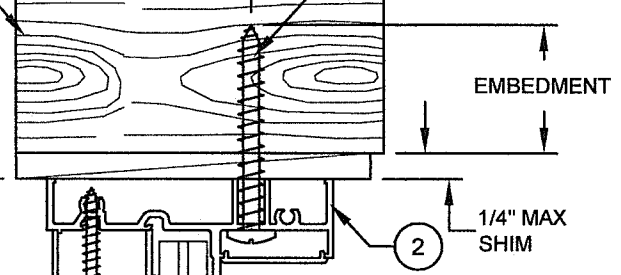


INSTALLATION TYPE G

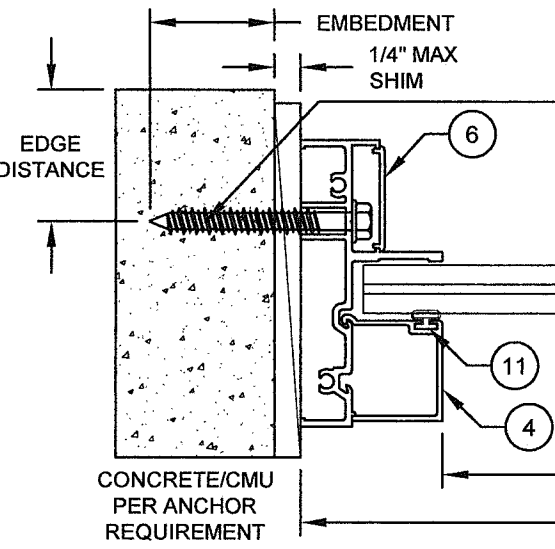


INSTALLATION TYPE F

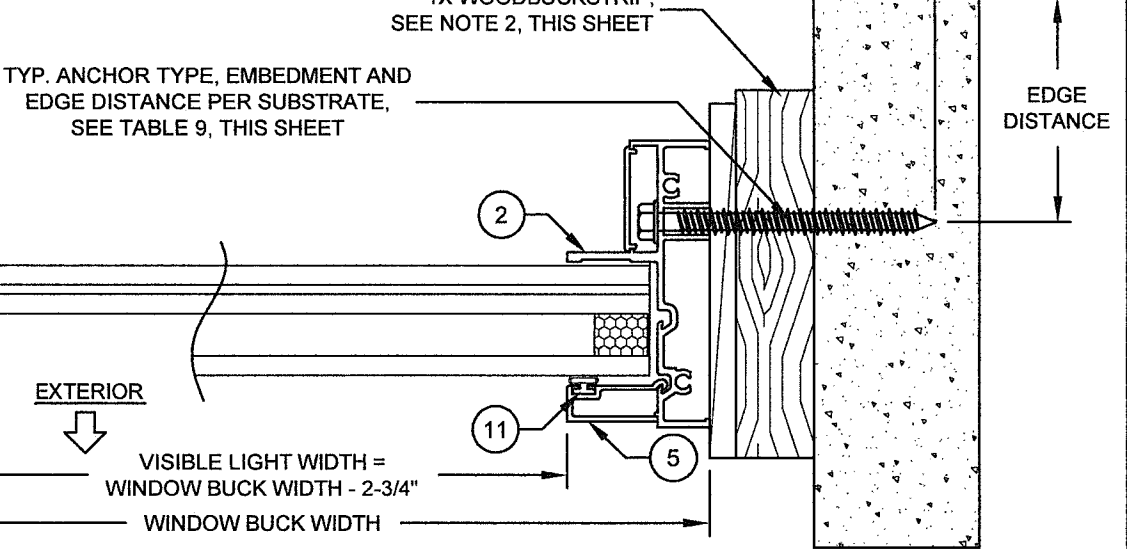

HORIZONTAL SECTION C-C

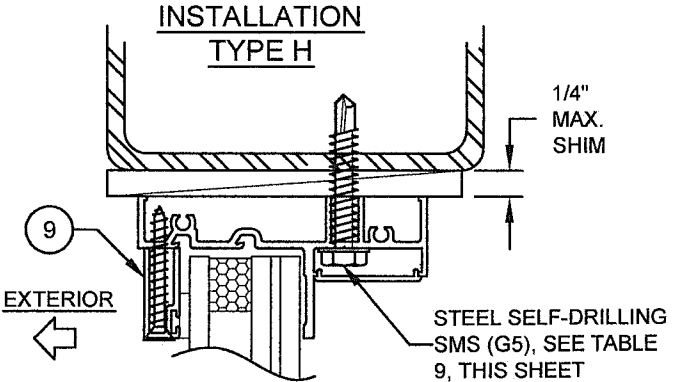

MIAMI-DADE APPROVED MULLION (SEE SEPERATE NOA), ALUMINUM, STEEL FRAMING OR STEEL STUD. SEE SUBSTRATE PROPERTIES, TABLE 9, THIS SHEET

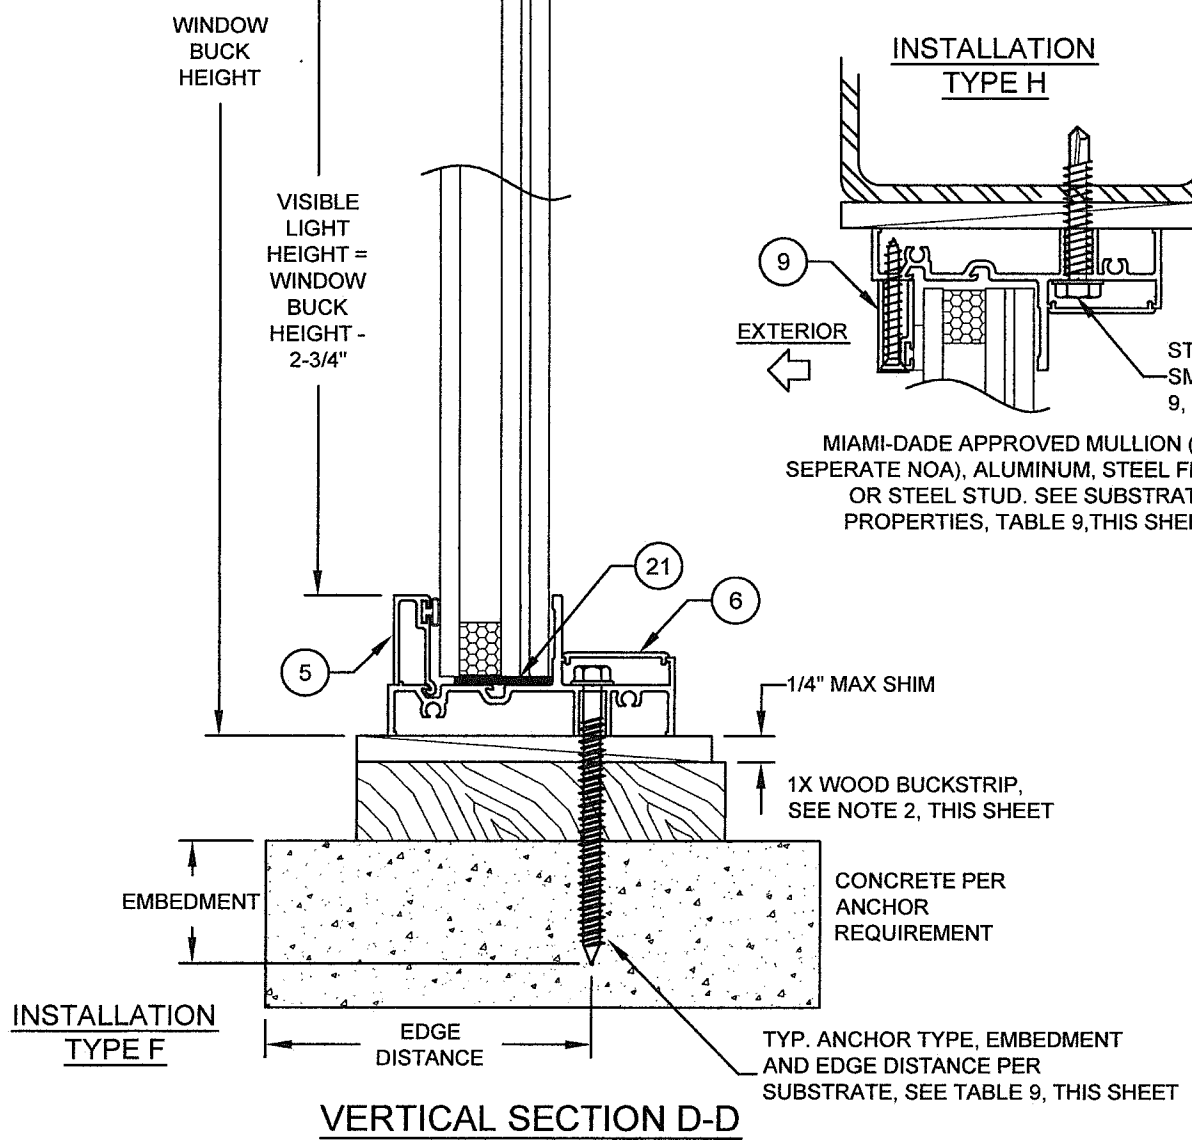

VERTICAL SECTION D-D

TABLE 9:

Anchor	Substrate	Min. Edge Distance	Min. Embedment	Max O.C. Spacing
#12 or #14 410 SS Screw	Southern Pine (SG=0.55)	9/16"	1-3/8"	12"
	Aluminum, 6063-T5 min.	3/8"	0.063" *	12"
	A36 Steel	3/8"	0.063" *	12"
	Steel Stud, Gr. 33 min.	3/8"	0.045" (18 Ga) *	12"
#12 or #14 Steel Screw (G5)	Southern Pine (SG=0.55)	9/16"	1-3/8"	12"
	Aluminum, 6063-T5 min.	3/8"	0.063" *	12"
	A36 Steel	3/8"	0.063" *	12"
	Steel Stud, Gr. 33 min.	3/8"	0.045" (18 Ga) *	12"
1/4" 410 SS CreteFlex	UngROUTED CMU, (ASTM C-90)	2-1/2"	1-1/4"	12"
	Concrete (min. 3.35 ksi)	1"	1-3/4"	12"
1/4" Steel Ultracon	Concrete (min. 2.85 ksi)	2-1/2"	1-3/8"	12"
	UngROUTED CMU, (ASTM C-90)	2-1/2"	1-1/4"	12"
1/4" Steel Ultracon +	Concrete (min. 3 ksi)	1-3/16"	1-3/8"	12"
	UngROUTED CMU, (ASTM C-90)	1-1/2"	1-1/4"	12"
5/16" Steel Ultracon	Concrete (min. 3.5 ksi)	1-1/4"	1-3/4"	12"
	GROUTED CMU, (ASTM C-90)	2-1/2"	1-3/4"	12"

* MIN. OF 3 THREADS BEYOND THE METAL SUBSTRATE.
 "UNGROUTED CMU" VALUES MAY BE USED FOR GROUTED CMU APPLICATIONS.
 ALL HEAD TYPES APPLICABLE.

INSTALLATION NOTES:

1. USE ONLY ANCHORS LISTED ON THIS SHEET. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS.
2. WOOD BUCKS DEPICTED ON THIS SHEET AS "1X", ARE BUCKS WHOSE TOTAL THICKNESS IS LESS THAN 1-1/2". 1X WOOD BUCKS ARE OPTIONAL IF UNIT CAN BE INSTALLED DIRECTLY TO SOLID CONCRETE. WOOD BUCKS DEPICTED AS "2X" ARE 1-1/2" THICK OR GREATER. INSTALLATION TO THE SUBSTRATE OF WOOD BUCKS TO BE ENGINEERED BY OTHERS OR AS APPROVED BY AUTHORITY HAVING JURISDICTION.
3. FOR ATTACHMENT TO METAL: THE STRUCTURAL MEMBER SHALL BE OF A SIZE TO PROVIDE FULL SUPPORT TO THE WINDOW FRAME.
4. IF APPLICABLE, LOWER DESIGN PRESSURE FROM EITHER WINDOW OR MULLION NOA APPLIES TO WHOLE SYSTEM.

Material	Min. F _y	Min. F _u
Steel Screw	92 ksi	120 ksi
410 Screw	90 ksi	110 ksi
Elco UltraCon®	155 ksi	177 ksi
1/4" DeWalt UltraCon+®	148 ksi	164 ksi
410 SS Elco/Dewalt CreteFlex®	127.4 ksi	189.7 ksi
6063-T5 Aluminum	16 ksi	22 ksi
A36 Steel	36 ksi	58 ksi
Gr. 33 Steel Stud	33 ksi	45 ksi

PRODUCT REVISED
 as complying with the Florida Building Code
 NOA-No. **20-0401.10**
 Expiration Date: **02/19/2024**
 By: *Manuel Perez*
 Miami-Dade Product Control

Revision: E) REVISED ANCHOR TYPE TABLE, UPDATED MATERIAL PROP. TABLE.
 JR - 03/11/20

1070 TECHNOLOGY DRIVE
 N. VENICE, FL 34275
 (941) 480-1600




REGISTRATION #29296

FIXED WINDOW INSTALLATION GUIDELINES
 EQUAL-LEG INSTALLATION


4/12/13
 J ROSOWSKI
 MD-7720A.1
 7 OF 10
 NTS
 PW7720A

ANTHONY LYNN MILLER
 LICENSE
 No. 58705
 3/19/20
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER


A. LYNN MILLER, P.E.
 P.E.# 58705

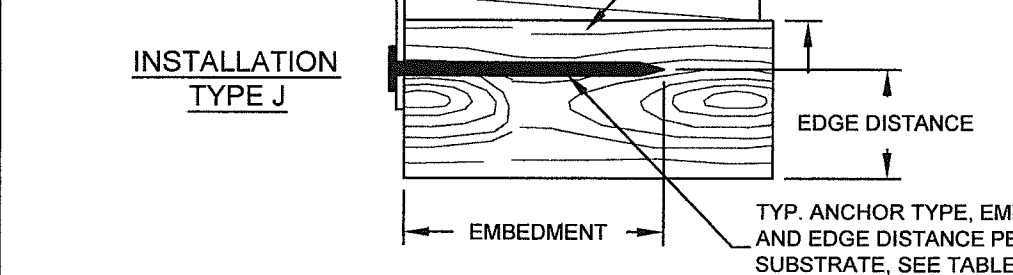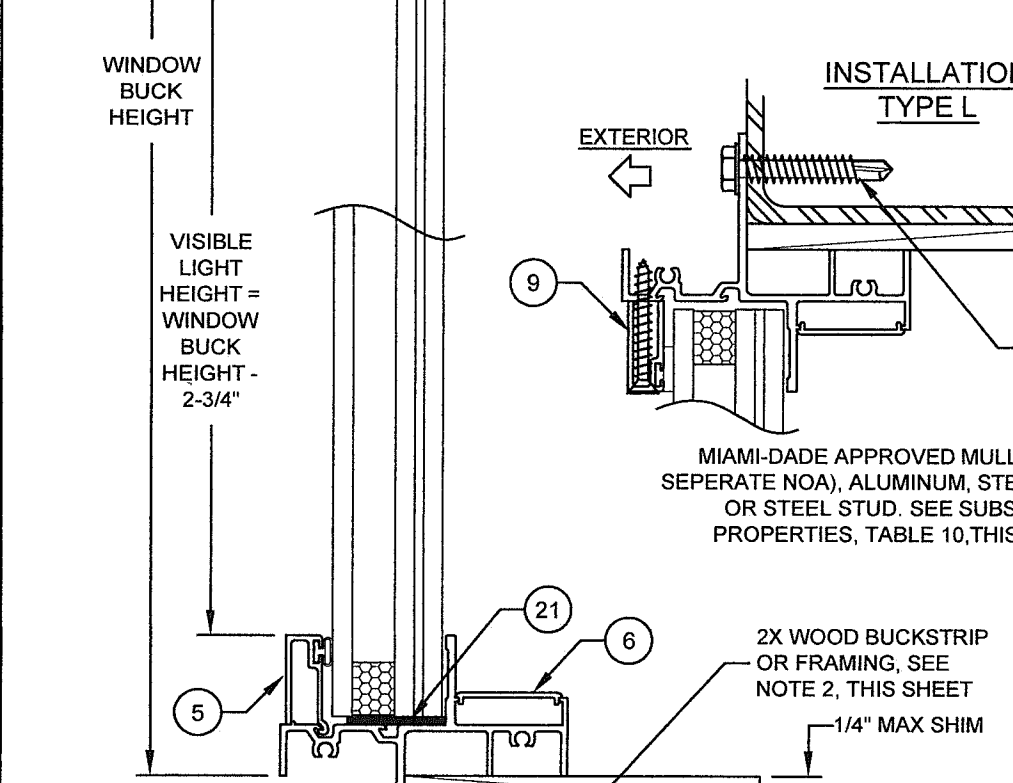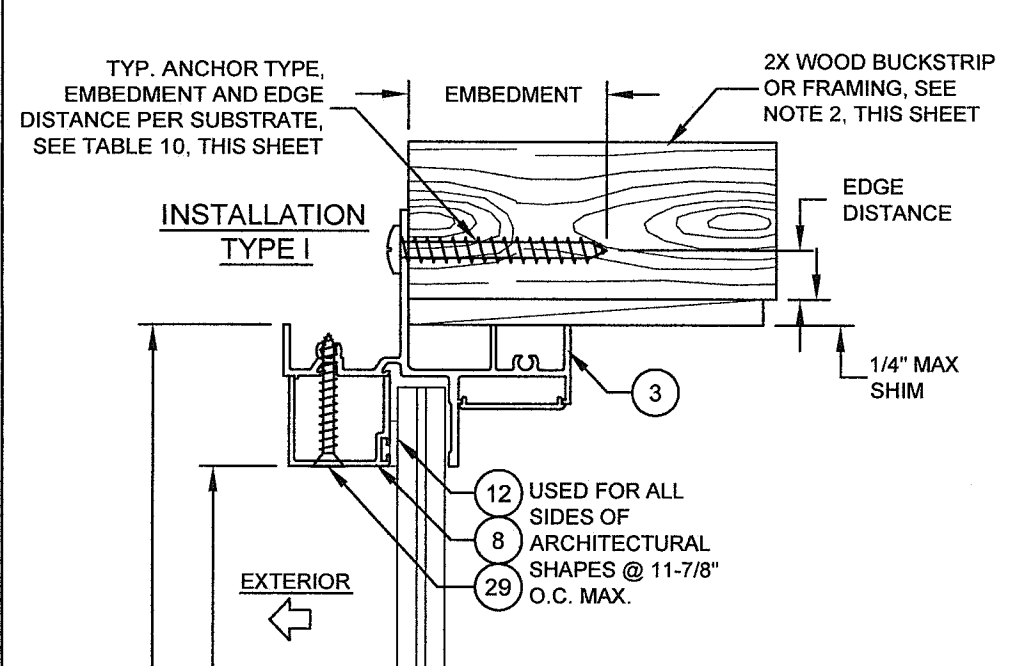

VERTICAL SECTION F-F

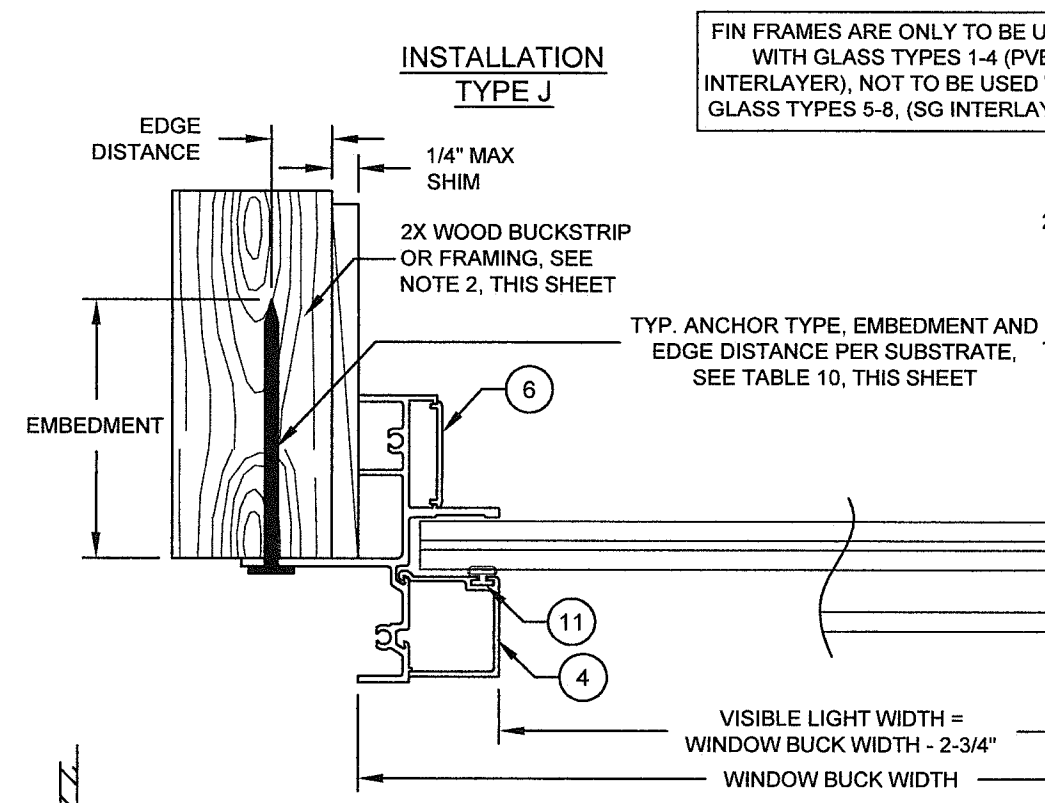

FIN FRAMES ARE ONLY TO BE USED WITH GLASS TYPES 1-4 (PVB INTERLAYER), NOT TO BE USED WITH GLASS TYPES 5-8, (SG INTERLAYER).

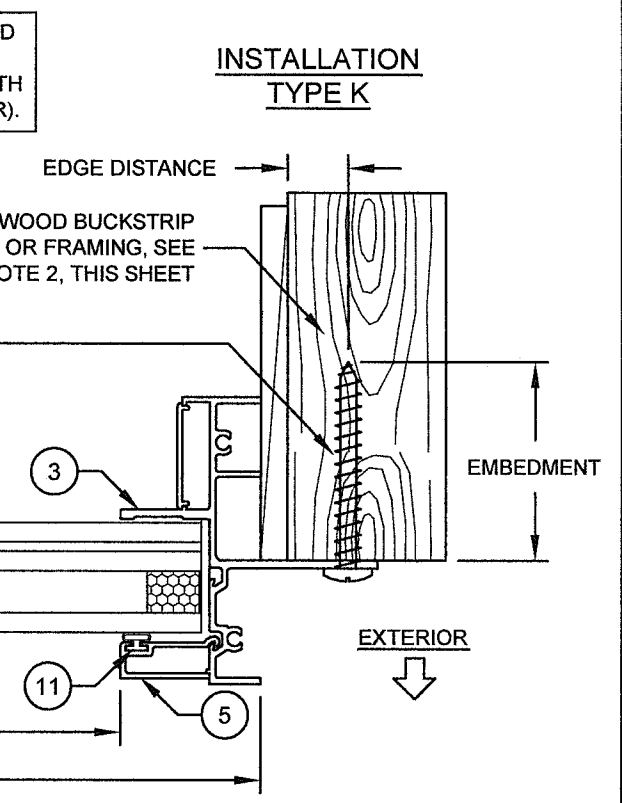

HORIZONTAL SECTION E-E

TABLE 10:

Anchor	Substrate	Min. Edge Distance	Max. O.C. Spacing
2-1/2" x .113" Box Nail	Southern Pine (SG=0.55)	5/16"	5"
2-1/2" x .131" Common Nail	Southern Pine (SG=0.55)	3/8"	5"
2-1/2" x .145" Roofing Nail	Southern Pine (SG=0.55)	3/8"	5"
#10 x 1" Steel Screw*	Southern Pine (SG=0.55)	1/2"	5"
	0.093" Aluminum, 6063-T5 min.	5/16"	5"
	1/16" A36 Steel	5/16"	5"
	0.045" (18 Ga) Steel Stud, Gr. 33	5/16"	5"

* MIN. OF 3 THREADS BEYOND THE METAL SUBSTRATE.

INSTALLATION NOTES:

1. USE ONLY ANCHORS LISTED ON THIS SHEET. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS.
2. FOR ATTACHMENT TO METAL: THE STRUCTURAL MEMBER SHALL BE OF A SIZE TO PROVIDE FULL SUPPORT TO THE WINDOW FRAME.
3. IF APPLICABLE, LOWER DESIGN PRESSURE FROM EITHER WINDOW OR MULLION NOA APPLIES TO WHOLE SYSTEM.

Material	Min. F _y	Min. F _u
Steel Screw	92 ksi	120 ksi
6063-T5 Aluminum	16 ksi	22 ksi
A36 Steel	36 ksi	58 ksi
Gr. 33 Steel Stud	33 ksi	45 ksi

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. **20-0401.10**
Expiration Date: **02/19/2024**
By: *Manuel Perez*
Miami-Dade Product Control

E) NO CHANGES THIS SHEET.
Revision: JR - 03/11/20

1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
(941) 480-1600

REGISTRATION #29296

FIXED WINDOW INSTALLATION GUIDELINES 4/12/13
Date

FIN INSTALLATION
J ROSOWSKI
By

MD-7720A.1
No. DWG


8 OF 10
Sheet

PW7720A NTS
Scale

Series Desc. Title

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/19/20
STATE OF FLORIDA
PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.
P.E.# 58705

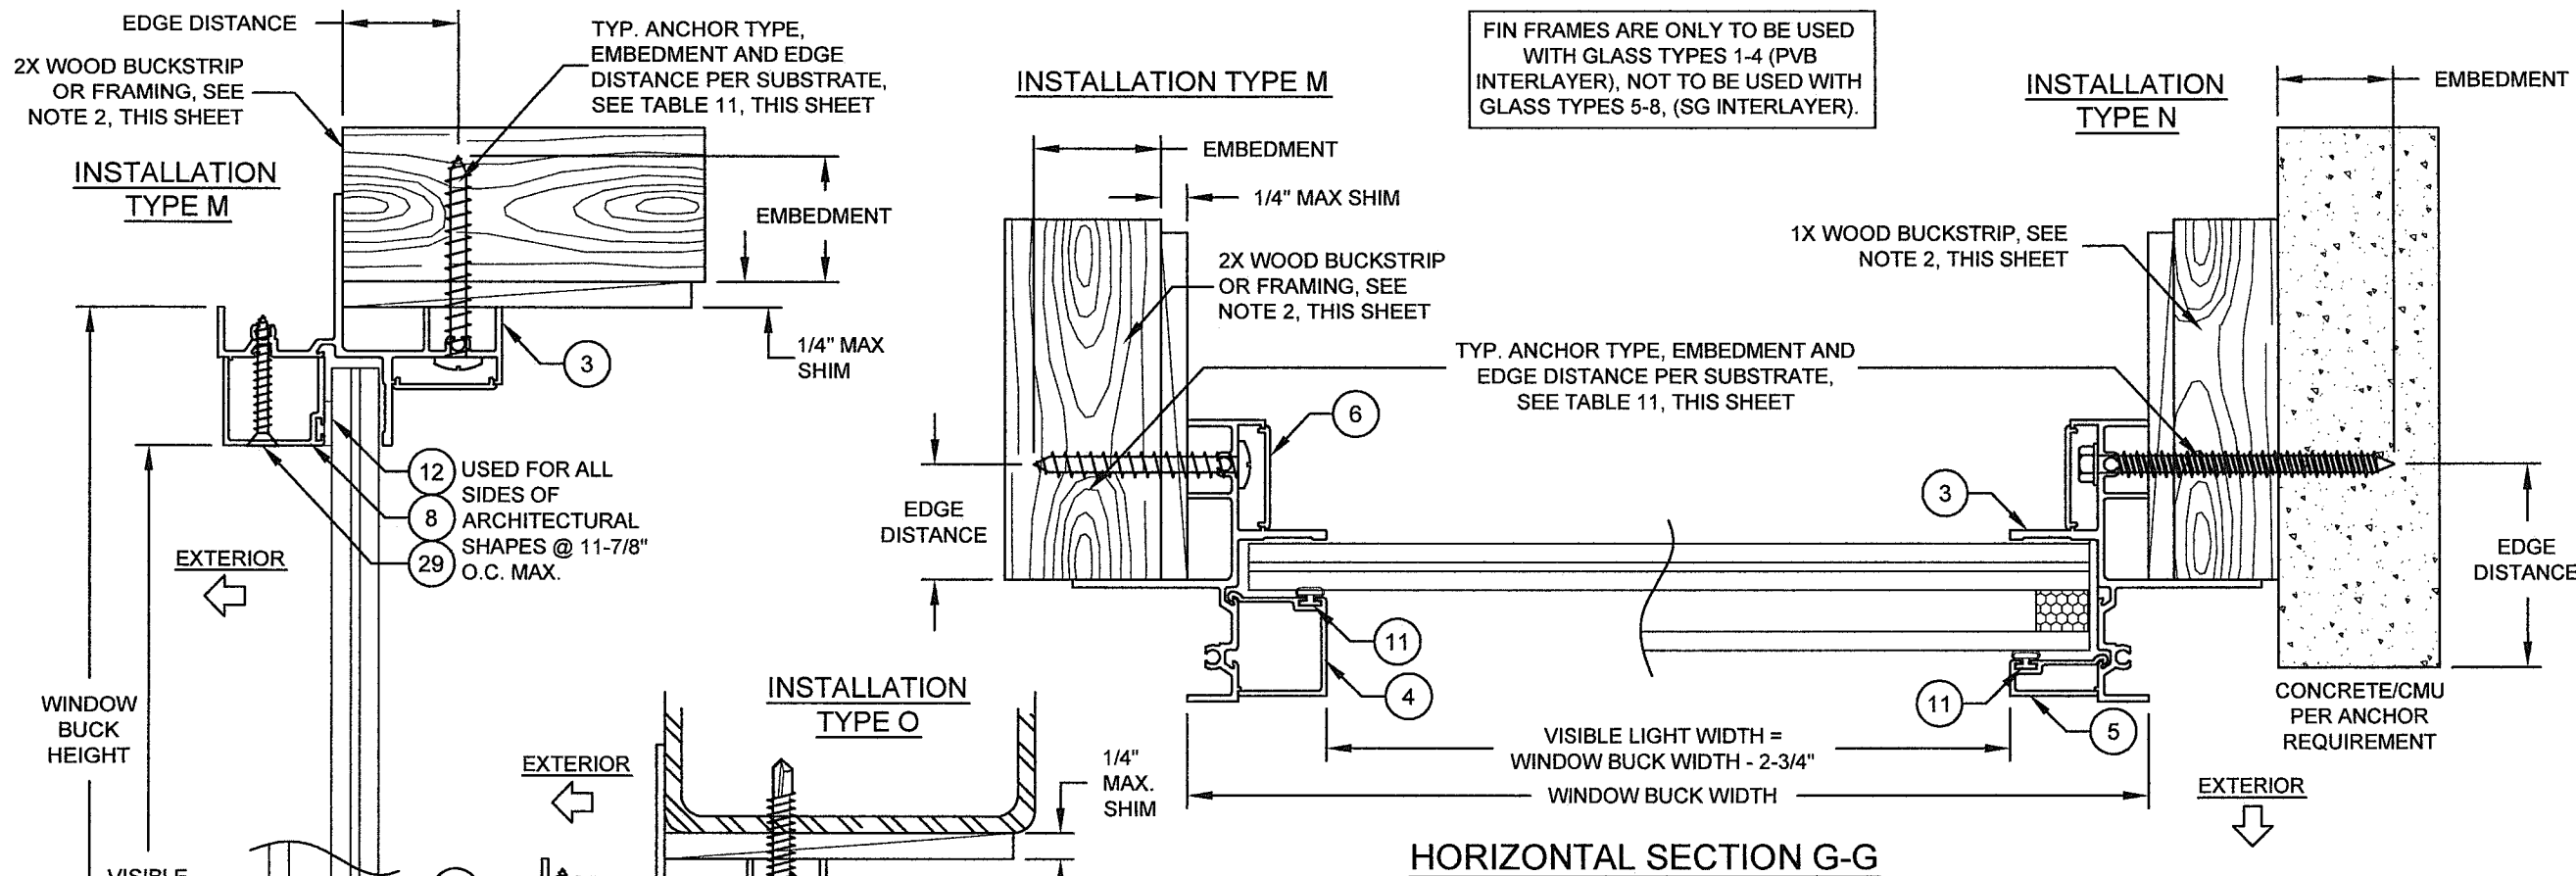

HORIZONTAL SECTION G-G

TABLE 11:


Anchor	Substrate	Min. Edge Distance	Min. Embedment	Max O.C. Spacing
#12 or #14 410 SS Screw	Southern Pine (SG=0.55)	9/16"	1-3/8"	4.9"
	Aluminum, 6063-T5 min.	3/8"	0.063" *	4.9"
	A36 Steel	3/8"	0.063" *	4.9"
#12 or #14 Steel Screw (G5)	Steel Stud, Gr. 33 min.	3/8"	0.045" (18 Ga) *	4.9"
	Southern Pine (SG=0.55)	9/16"	1-3/8"	4.9"
	Aluminum, 6063-T5 min.	3/8"	0.063" *	4.9"
1/4" 410 SS CreteFlex	A36 Steel	3/8"	0.063" *	4.9"
	Steel Stud, Gr. 33 min.	3/8"	0.045" (18 Ga) *	4.9"
	UngROUTED CMU, (ASTM C-90)	2-1/2"	1-1/4"	9"
1/4" Steel Ultracon	Concrete (min. 3.35 ksi)	1"	1-3/4"	9"
	Concrete (min. 2.85 ksi)	1"	1-3/4"	9"
1/4" Steel Ultracon+	UngROUTED CMU, (ASTM C-90)	2-1/2"	1-1/4"	9"
	Concrete (min. 3 ksi)	1"	1-3/8"	4.9"
5/16" Steel Ultracon	UngROUTED CMU, (ASTM C-90)	1"	1-1/4"	4.9"
	Concrete (min. 3.5 ksi)	1-1/4"	1-3/4"	9"
	GROUTED CMU, (ASTM C-90)	2-1/2"	1-3/4"	9"

* MIN. OF 3 THREADS BEYOND THE METAL SUBSTRATE.
 "UNGROUTED CMU" VALUES MAY BE USED FOR GROUTED CMU APPLICATIONS.
 ALL HEAD TYPES APPLICABLE.

INSTALLATION NOTES:

- USE ONLY ANCHORS LISTED ON THIS SHEET. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS.
- WOOD BUCKS DEPICTED ON THIS SHEET AS "1X", ARE BUCKS WHOSE TOTAL THICKNESS IS LESS THAN 1-1/2". 1X WOOD BUCKS ARE OPTIONAL IF UNIT CAN BE INSTALLED DIRECTLY TO SOLID CONCRETE. WOOD BUCKS DEPICTED AS "2X" ARE 1-1/2" THICK OR GREATER. INSTALLATION TO THE SUBSTRATE OF WOOD BUCKS TO BE ENGINEERED BY OTHERS OR AS APPROVED BY AUTHORITY HAVING JURISDICTION.
- FOR ATTACHMENT TO METAL: THE STRUCTURAL MEMBER SHALL BE OF A SIZE TO PROVIDE FULL SUPPORT TO THE WINDOW FRAME.
- IF APPLICABLE, LOWER DESIGN PRESSURE FROM EITHER WINDOW OR MULLION NOA APPLIES TO WHOLE SYSTEM.

Material	Min. F _y	Min. F _u
Steel Screw	92 ksi	120 ksi
410 Screw	90 ksi	110 ksi
Elco UltraCon®	155 ksi	177 ksi
1/4" DeWalt UltraCon+®	148 ksi	164 ksi
410 SS Elco/Dewalt CreteFlex®	127.4 ksi	189.7 ksi
6063-T5 Aluminum	16 ksi	22 ksi
A36 Steel	36 ksi	58 ksi
Gr. 33 Steel Stud	33 ksi	45 ksi

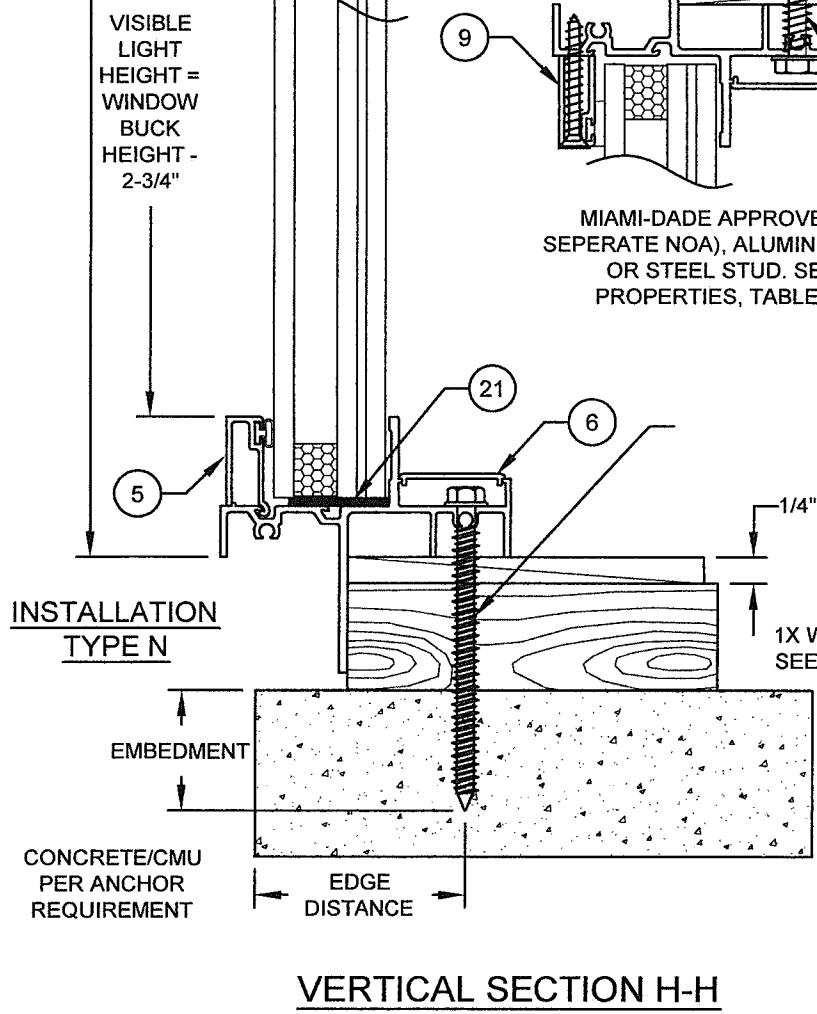

VERTICAL SECTION H-H

PRODUCT REVISED
 as complying with the Florida Building Code
NOA-No. 20-0401.10
 Expiration Date: **02/19/2024**
 By: *Manuel Perez*
 Miami-Dade Product Control

Revision: E) REVISED ANCHOR TYPE TABLE, UPDATED MATERIAL PROP. TABLE.
 JR - 03/11/20

1070 TECHNOLOGY DRIVE
 N. VENICE, FL 34275
 (941) 480-1600

REGISTRATION #29296

FIXED WINDOW INSTALLATION GUIDELINES

FIN INSTALLATION

DATE: 4/12/13
 DRAWN BY: J ROSOWSKI
 SCALE: NTS






NO. 9 OF 10
 SHEET: PW7720A.1

ANTHONY LYNN MILLER
 LICENSE
 No. 58705
 3/19/20
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.
 P.E.# 58705

TABLE 12:

Item #	PGT Part #	Description	Material
1	4253C	Flanged Frame	Alum. 6063-T5
2	4285	Equal-leg Frame	Alum. 6063-T5
3	4256	Integral Fin Frame	Alum. 6063-T5
4	4255	7/16" Lami. Glass Beading	Alum. 6063-T5
5	4254	I.G. Glass Beading	Alum. 6063-T5
6a	4270	Installation Fastener Cover	Alum. 6063-T5
6b	4224	Installation Fastener Cover	Rigid PVC
8	4267	7/16" Lami. Glass Beading for Curves	Alum. 6063-T5
9	4269	I.G. Beading for Curves	Alum. 6063-T5
10	70589C	Gasket (at 90° corner joints)	Polyethylene
11	TP247/8	Vinyl Bulb Weatherstrip	Flex PVC, Duro. 65 +/-1
12	61308K	Foam Beading Tape	
13	Dow 791, 899, 983, 995 or GE 7700	Backbedding	Silicone
20	71652K	Setting Block, Mono. 3/16" x 7/16" x 4"	Neoprene, Duro. 85 +/-1
21	71704AK	Setting Block, I.G. 3/16" x 1-3/32" x 4"	Neoprene, Duro. 85 +/-1
29	76X114FPTX	#6 x 1-1/4" FH SMS (Curved Beading)	Stainless Steel
30	781PQX	#8 x 1" Quad PH SMS (Assembly)	Stainless Steel
75		Kommerling Kodispace 4SG TPS	See this Sheet for Materials
76		Quanex Super Spacer nXT	
77		Quanex Duraseal Spacer	
78		Cardinal XL Edge Spacer	

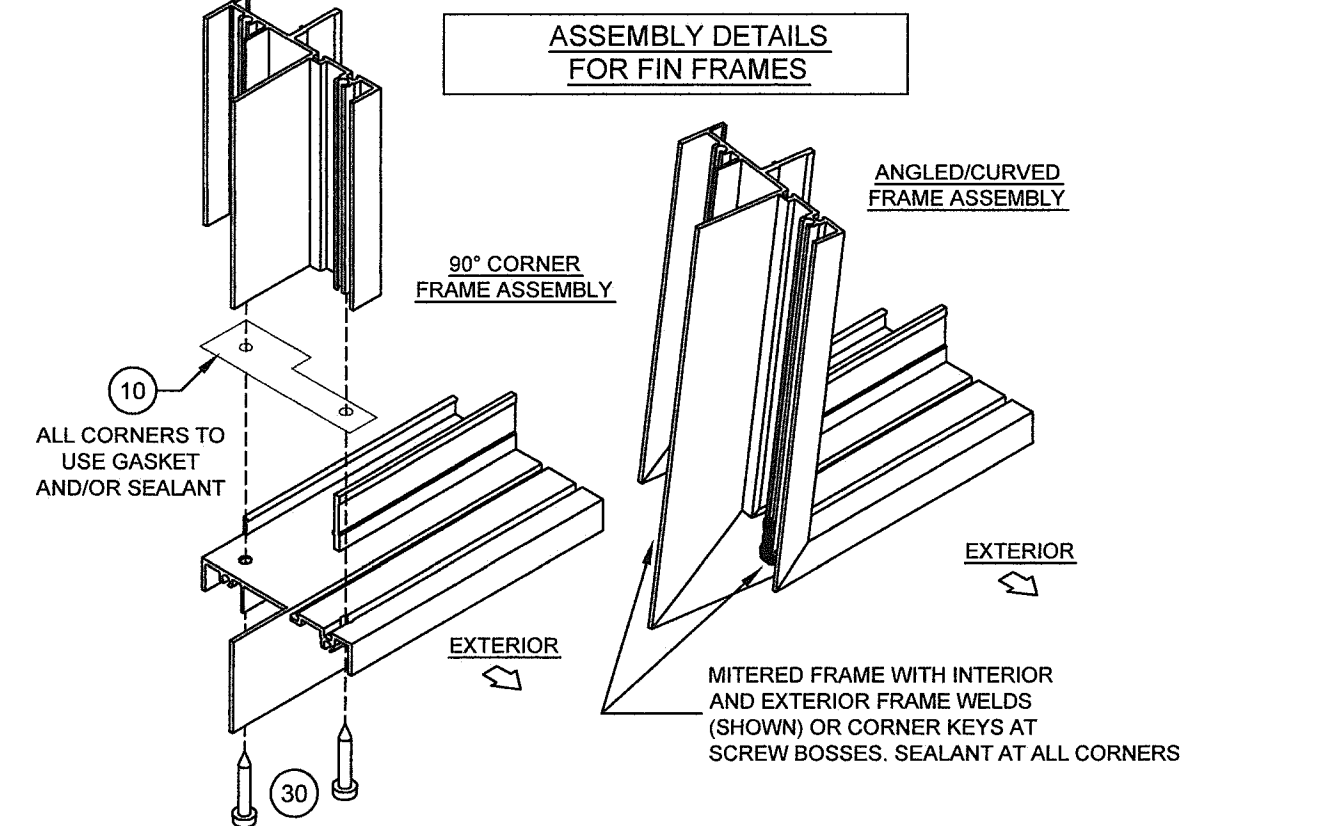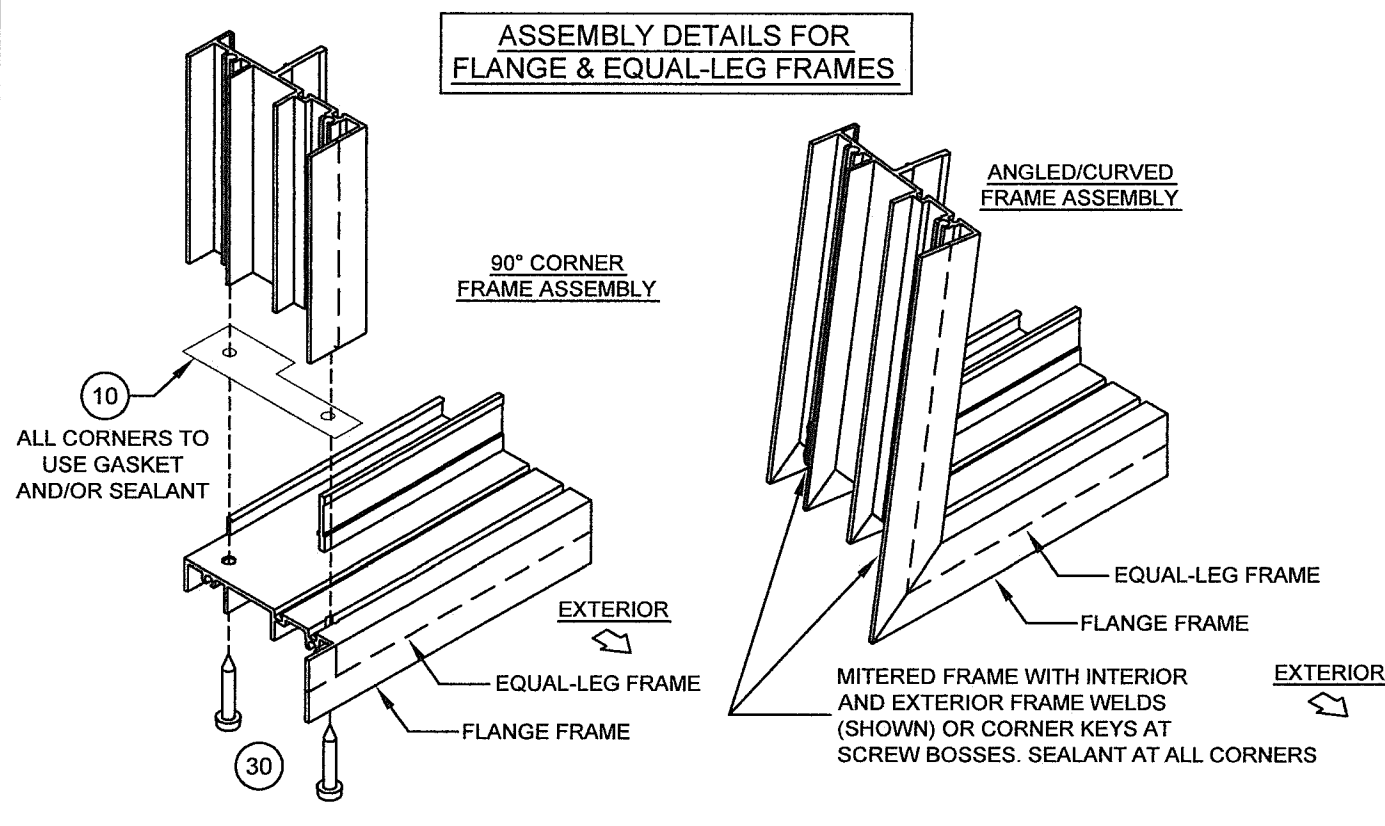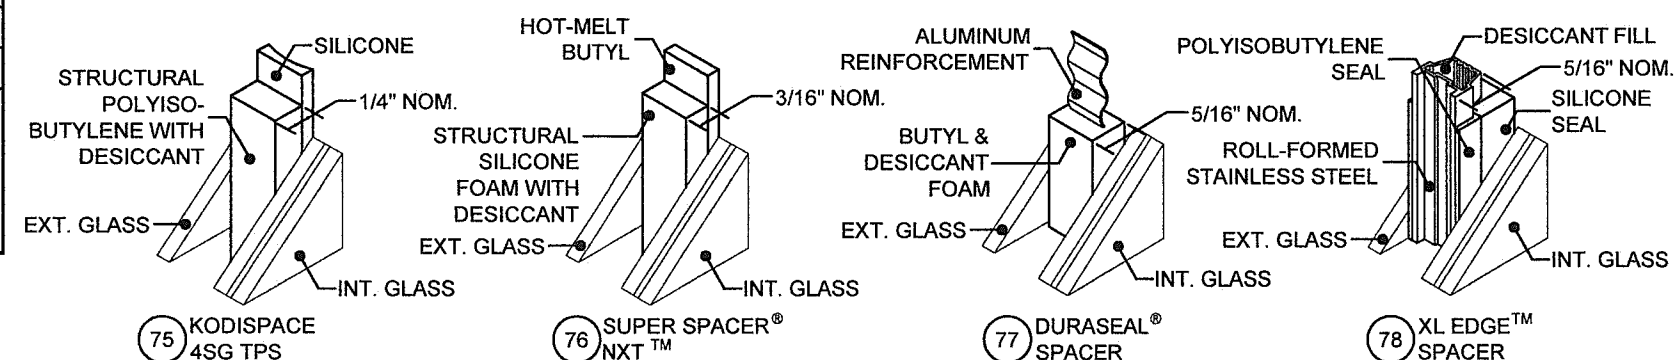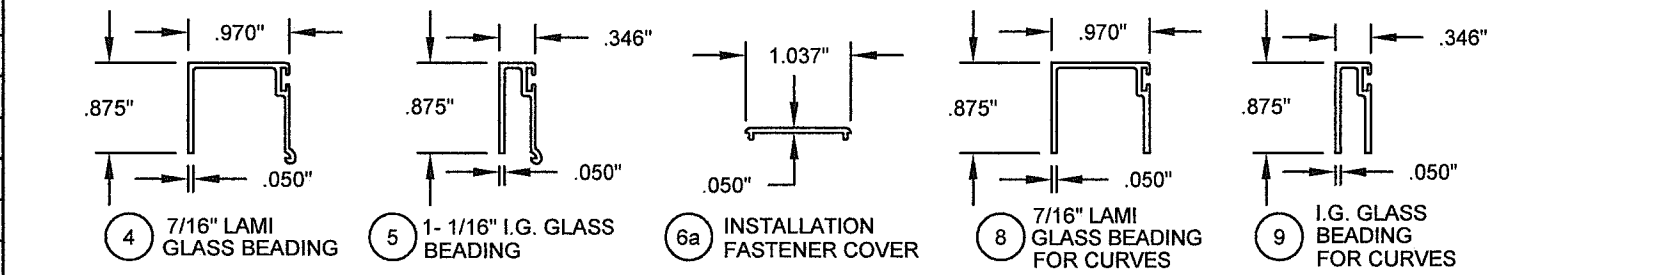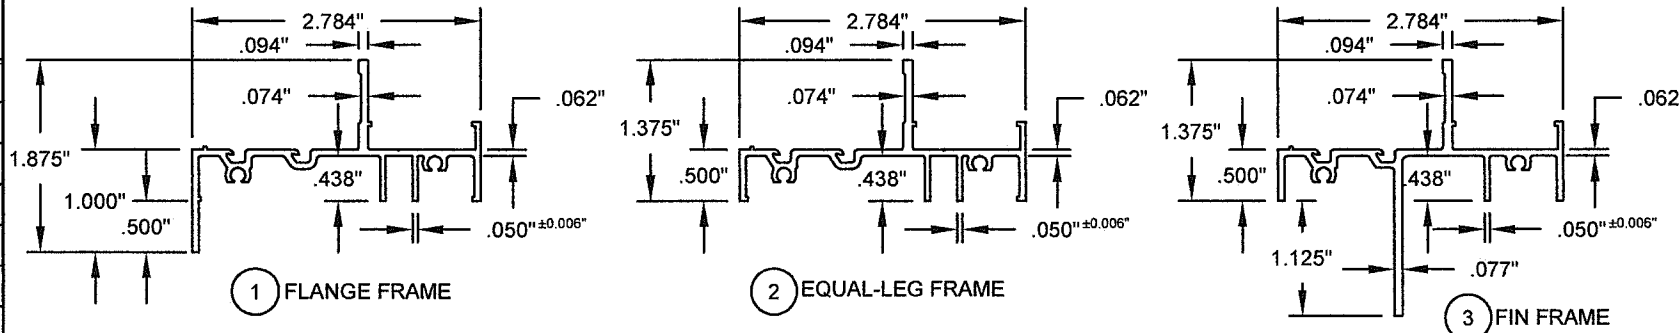

PRODUCT REVISED
 as complying with the Florida Building Code
NOA-No. 20-0401.10
Expiration Date: 02/19/2024
 By: *Manuel Perez*
 Miami-Dade Product Control

Revision: E) ADDED BACKBEDDING.
 JR - 03/11/20

1070 TECHNOLOGY DRIVE
 N. VENICE, FL 34275
 (941) 480-1600

REGISTRATION #29296

FIXED WINDOW INSTALLATION GUIDELINES

BOM, EXTRUSIONS AND CORNERS

PW7720A

4/12/13

Date

J ROSOWSKI

By

MD-7720A.1

Rev

E

10 OF 10

Sheet

NTS

Scale

Series

Desc.

Title

ANTHONY LYNN MILLER
 LICENSE
 No. 58705
 3/19/20
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER
 A. LYNN MILLER, P.E.
 P.E.# 58705