

ANCHOR LOAD CAPACITY - PSF				
ANCHOR TYPE		ANCHORS 'A', 'B', 'C' & 'D'		
SHIM SPACE		3/8" SHIM	1/2" MAX. SHIM	
PANEL WIDTH INCHES	DOOR FRAME HEIGHT INCHES	6 ANCHORS AT MTG. STILE ENDS	6 ANCHORS AT MTG. STILE ENDS	8 ANCHORS AT MTG. STILE ENDS
		EXT. (+) INT. (-)	EXT. (+) INT. (-)	EXT. (+) INT. (-)
42	82-7/8	100.0	100.0	100.0
48		100.0	100.0	100.0
54		100.0	100.0	100.0
60		100.0	100.0	100.0
66		75.0	75.0	75.0
72		75.0	75.0	75.0
78		75.0	75.0	75.0
84		75.0	73.5	75.0
42	84	100.0	100.0	100.0
48		100.0	100.0	100.0
54		100.0	100.0	100.0
60		100.0	100.0	100.0
62		75.0	75.0	75.0
66		75.0	75.0	75.0
72		75.0	75.0	75.0
78		75.0	75.0	75.0
84	75.0	72.5	75.0	
42	90	100.0	100.0	100.0
48		100.0	100.0	100.0
54		100.0	100.0	100.0
60		100.0	100.0	100.0
62		75.0	75.0	75.0
66		75.0	75.0	75.0
72		75.0	75.0	75.0
78		75.0	75.0	75.0
80	75.0	71.0	75.0	
42	96	100.0	100.0	100.0
48		100.0	100.0	100.0
54		100.0	98.7	100.0
60		100.0	88.8	100.0
62		75.0	75.0	75.0
66		75.0	75.0	75.0
72		75.0	74.0	75.0
74		75.0	72.0	75.0
42	102	100.0	100.0	100.0
48		100.0	100.0	100.0
50		100.0	100.0	100.0
52		100.0	96.4	100.0
54		100.0	92.9	100.0
56		100.0	89.5	100.0
60		75.0	75.0	75.0
62		75.0	75.0	75.0
66	75.0	75.0	75.0	
70	75.0	71.6	75.0	
42	108	100.0	100.0	100.0
48		100.0	98.7	100.0
50		100.0	94.7	100.0
60		75.0	75.0	75.0
62		75.0	75.0	75.0
66		75.0	71.6	75.0

ANCHOR LOAD CAPACITY - PSF				
ANCHOR TYPE		ANCHORS 'A', 'B', 'C' & 'D'		
SHIM SPACE		3/8" SHIM	1/2" MAX. SHIM	
PANEL WIDTH INCHES	DOOR FRAME HEIGHT INCHES	6 ANCHORS AT MTG. STILE ENDS	6 ANCHORS AT MTG. STILE ENDS	8 ANCHORS AT MTG. STILE ENDS
		EXT. (+) INT. (-)	EXT. (+) INT. (-)	EXT. (+) INT. (-)
42	114	100.0	100.0	100.0
48		100.0	93.5	100.0
50		100.0	89.7	100.0
60		75.0	74.8	75.0
62		75.0	72.4	75.0
42	120	100.0	100.0	100.0
48		100.0	88.8	100.0
50		75.0	75.0	75.0
60		75.0	71.0	75.0

INSTRUCTIONS:

USE CHARTS AS FOLLOWS.

- STEP 1** DETERMINE DESIGN WIND LOAD REQUIREMENT BASED ON WIND VELOCITY, BLDG. HEIGHT, WIND ZONE USING APPLICABLE ASCE 7 STANDARD.
- STEP 2** DETERMINE DOOR CAPACITY FROM TABLE ON SHEET 1.1 FOR THE GLASS TYPE USED.
- STEP 3** USING CHARTS ABOVE SELECT ANCHOR OPTION WITH DESIGN RATING MORE THAN DESIGN LOAD SPECIFIED IN STEP 1 ABOVE.
- STEP 4** THE LOWEST VALUE RESULTING FROM STEPS 2 AND 3 SHALL APPLY TO ENTIRE SYSTEM.
- STEP 5** SEE SHEET 8 TO DETERMINE MIN. AND MAX. GAP DIMENSIONS FOR UNANCHORED JAMBS.

THESE DOORS ARE RATED FOR LARGE & SMALL MISSILE IMPACT. SHUTTERS ARE NOT REQUIRED.

**SERIES 1100 (L.M.I.)
ALUMINUM SLIDING GLASS DOOR**

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2020 (7TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY. ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2020 FLORIDA BLDG. CODE & ADOPTED STANDARDS.


THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC. CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.

MANUFACTURER'S LABEL SHALL BE LOCATED ON A READILY VISIBLE LOCATION IN ACCORDANCE WITH SECTION 1709.9.3 OF FLORIDA BUILDING CODE. LABELING TO COMPLY WITH SECTION 1709.9.2.

- A- CONTRACTOR TO BE RESPONSIBLE FOR THE SELECTION, PURCHASE AND INSTALLATION OF THIS PRODUCT BASED ON THIS PRODUCT EVALUATION PROVIDED HE/SHE DOES NOT DEVIATE FROM THE CONDITIONS DETAILED ON THIS DOCUMENT.
- B- THIS PRODUCT EVALUATION DOCUMENT WILL BE CONSIDERED INVALID IF ALTERED BY ANY MEANS.
- C- SITE SPECIFIC PROJECTS SHALL BE PREPARED BY A FLORIDA REGISTERED ENGINEER OR ARCHITECT WHICH WILL BECOME THE ENGINEER OF RECORD (E.O.R.) FOR THE PROJECT AND WHO WILL BE RESPONSIBLE FOR THE PROPER USE OF THE P.E.D. ENGINEER OF RECORD, ACTING AS A DELEGATED ENGINEER TO THE P.E.D. ENGINEER SHALL SUBMIT TO THIS LATTER THE SITE SPECIFIC DRAWINGS FOR REVIEW.
- D- THIS P.E.D. SHALL BEAR THE DATE AND ORIGINAL SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER OF RECORD THAT PREPARED IT.

Sealed: 04/20/2021
FL #25959.1

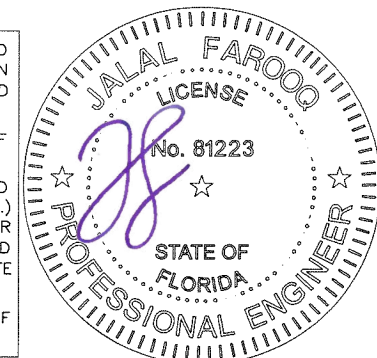


af c
AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978
COMP-ANL\18-06F-MC

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
8051 N.W. 79th Place
Medley, FL. 33166
Tel. (305) 764-3963 Fax. (305) 470-8285

revisions:	no	date	by	description
	A	08.05.20		UPDATED TO 2020 FBC
	B	04.06.21		POCKETS OPTION ADDED
date:	12-28-17			
scale:	-			
dr. by:	TARIQ			
chk. by:				
drawing no.	18-06F			
sheet	1 of 11			

DOOR DESIGN LOAD CAPACITY - PSF									
AVERAGE PANEL WIDTH INCHES	DOOR FRAME HEIGHT INCHES	STD. INTERLOCK WITHOUT ASTRAGAL		STD. INTERLOCK WITH OR WITHOUT STD. ASTRAGAL		STD. INTERLOCK WITH OR WITHOUT REINF. ASTRAGAL			
		GLASS TYPES 'A' & 'A1'		GLASS TYPES 'A' & 'A1'		GLASS TYPES 'B' & 'B1' 'C' & 'C1'		GLASS TYPES 'A' & 'A1'	
		EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)
42	82-7/8	65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
48		65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
54		65.0	75.0	71.1	88.9	71.1	80.0	80.0	88.9
60		65.0	75.0	64.0	80.0	-	-	64.0	80.0
66		65.0	75.0	-	-	-	-	-	-
72		65.0	75.0	-	-	-	-	-	-
78		65.0	75.0	-	-	-	-	-	-
84		65.0	75.0	-	-	-	-	-	-
42	84	65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
48		65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
54		65.0	75.0	71.1	88.9	71.1	80.0	71.1	88.9
60		65.0	75.0	64.0	80.0	-	-	64.0	80.0
62		65.0	75.0	-	-	-	-	-	-
66		65.0	75.0	-	-	-	-	-	-
72		65.0	75.0	-	-	-	-	-	-
78		65.0	75.0	-	-	-	-	-	-
84	65.0	75.0	-	-	-	-	-	-	
42	90	65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
48		65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
54		65.0	75.0	71.1	88.9	-	-	71.1	88.9
60		65.0	75.0	-	-	-	-	64.0	80.0
62		65.0	75.0	-	-	-	-	-	-
66		65.0	75.0	-	-	-	-	-	-
72		65.0	75.0	-	-	-	-	-	-
78		65.0	75.0	-	-	-	-	-	-
80	65.0	75.0	-	-	-	-	-	-	
42	96	65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
48		65.0	75.0	80.0	100.0	80.0	80.0	80.0	100.0
54		65.0	75.0	71.1	88.9	-	-	71.1	88.9
60		65.0	75.0	-	-	-	-	64.0	80.0
62		65.0	75.0	-	-	-	-	-	-
66		65.0	75.0	-	-	-	-	-	-
72		65.0	75.0	-	-	-	-	-	-
74		65.0	75.0	-	-	-	-	-	-
42	102	65.0	75.0	80.0	100.0	-	-	80.0	100.0
48		65.0	75.0	80.0	100.0	-	-	80.0	100.0
50		65.0	75.0	-	-	-	-	76.8	96.0
52		65.0	75.0	-	-	-	-	73.8	92.3
54		65.0	75.0	-	-	-	-	71.1	88.9
56		65.0	75.0	-	-	-	-	68.6	85.7
60		65.0	75.0	-	-	-	-	-	-
62		65.0	75.0	-	-	-	-	-	-
66		65.0	75.0	-	-	-	-	-	-
70		65.0	75.0	-	-	-	-	-	-
42	108	65.0	75.0	80.0	100.0	-	-	80.0	100.0
48		65.0	75.0	80.0	100.0	-	-	80.0	100.0
50		65.0	75.0	-	-	-	-	76.8	96.0
60		65.0	75.0	-	-	-	-	73.8	92.3
62		65.0	75.0	-	-	-	-	-	-
66		65.0	75.0	-	-	-	-	-	-

DOOR DESIGN LOAD CAPACITY - PSF									
AVERAGE PANEL WIDTH INCHES	DOOR FRAME HEIGHT INCHES	STD. INTERLOCK WITHOUT ASTRAGAL		STD. INTERLOCK WITH OR WITHOUT STD. ASTRAGAL		STD. INTERLOCK WITH OR WITHOUT REINF. ASTRAGAL			
		GLASS TYPES 'A' & 'A1'		GLASS TYPES 'A' & 'A1'		GLASS TYPES 'B' & 'B1' 'C' & 'C1'		GLASS TYPES 'A' & 'A1'	
		EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)	EXT.(+)	INT.(-)
42	114	65.0	75.0	-	-	-	-	80.0	100.0
48		65.0	75.0	-	-	-	-	80.0	100.0
50		65.0	75.0	-	-	-	-	76.8	96.0
60		65.0	75.0	-	-	-	-	-	-
62		65.0	75.0	-	-	-	-	-	-
42		120	65.0	75.0	-	-	-	-	80.0
48	65.0		75.0	-	-	-	-	80.0	100.0
50	65.0		75.0	-	-	-	-	-	-
60	65.0		75.0	-	-	-	-	-	-

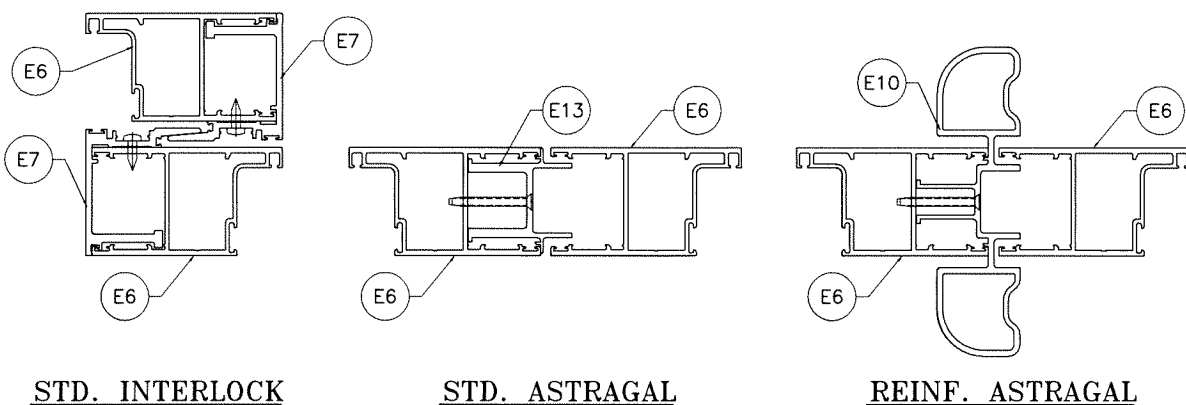


FOR INSTALLATIONS WHERE WATER INFILTRATION RESISTANCE IS REQUIRED
LIMIT ALL EXTERIOR(+) LOADS TO +76.7 PSF FOR 2-13/16" SILL HEIGHTS
SEE SHEET 5 FOR DETAILS

REINF. ASTRAGAL ONLY IN CONFIGURATIONS THAT REQUIRE ASTRAGAL.

$$\text{AVERAGE PANEL WIDTH} = \frac{\text{DOOR FRAME WIDTH}}{\text{NUMBER OF PANELS}}$$

NOTE:
GLASS CAPACITIES ON THIS SHEET ARE
BASED ON ASTM E1300-09 (3 SEC. GUSTS)
AND FLORIDA BUILDING COMMISSION
DECLARATORY STATEMENT DCA05-DEC-219

FL #25959.1

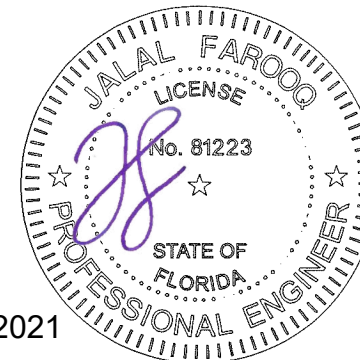

Sealed: 04/20/2021


AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978
COMP-ANL \ 18-06F-MG

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)

MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
8051 N.W. 79th Place
Medley, FL. 33166
Tel. (305) 764-3963 Fax. (305) 470-8285


no	date	by	description

date: 12-28-17 scale: - dr. by: TARIQ chn. by:
drawing no. **18-06F** sheet 1.1 of 11

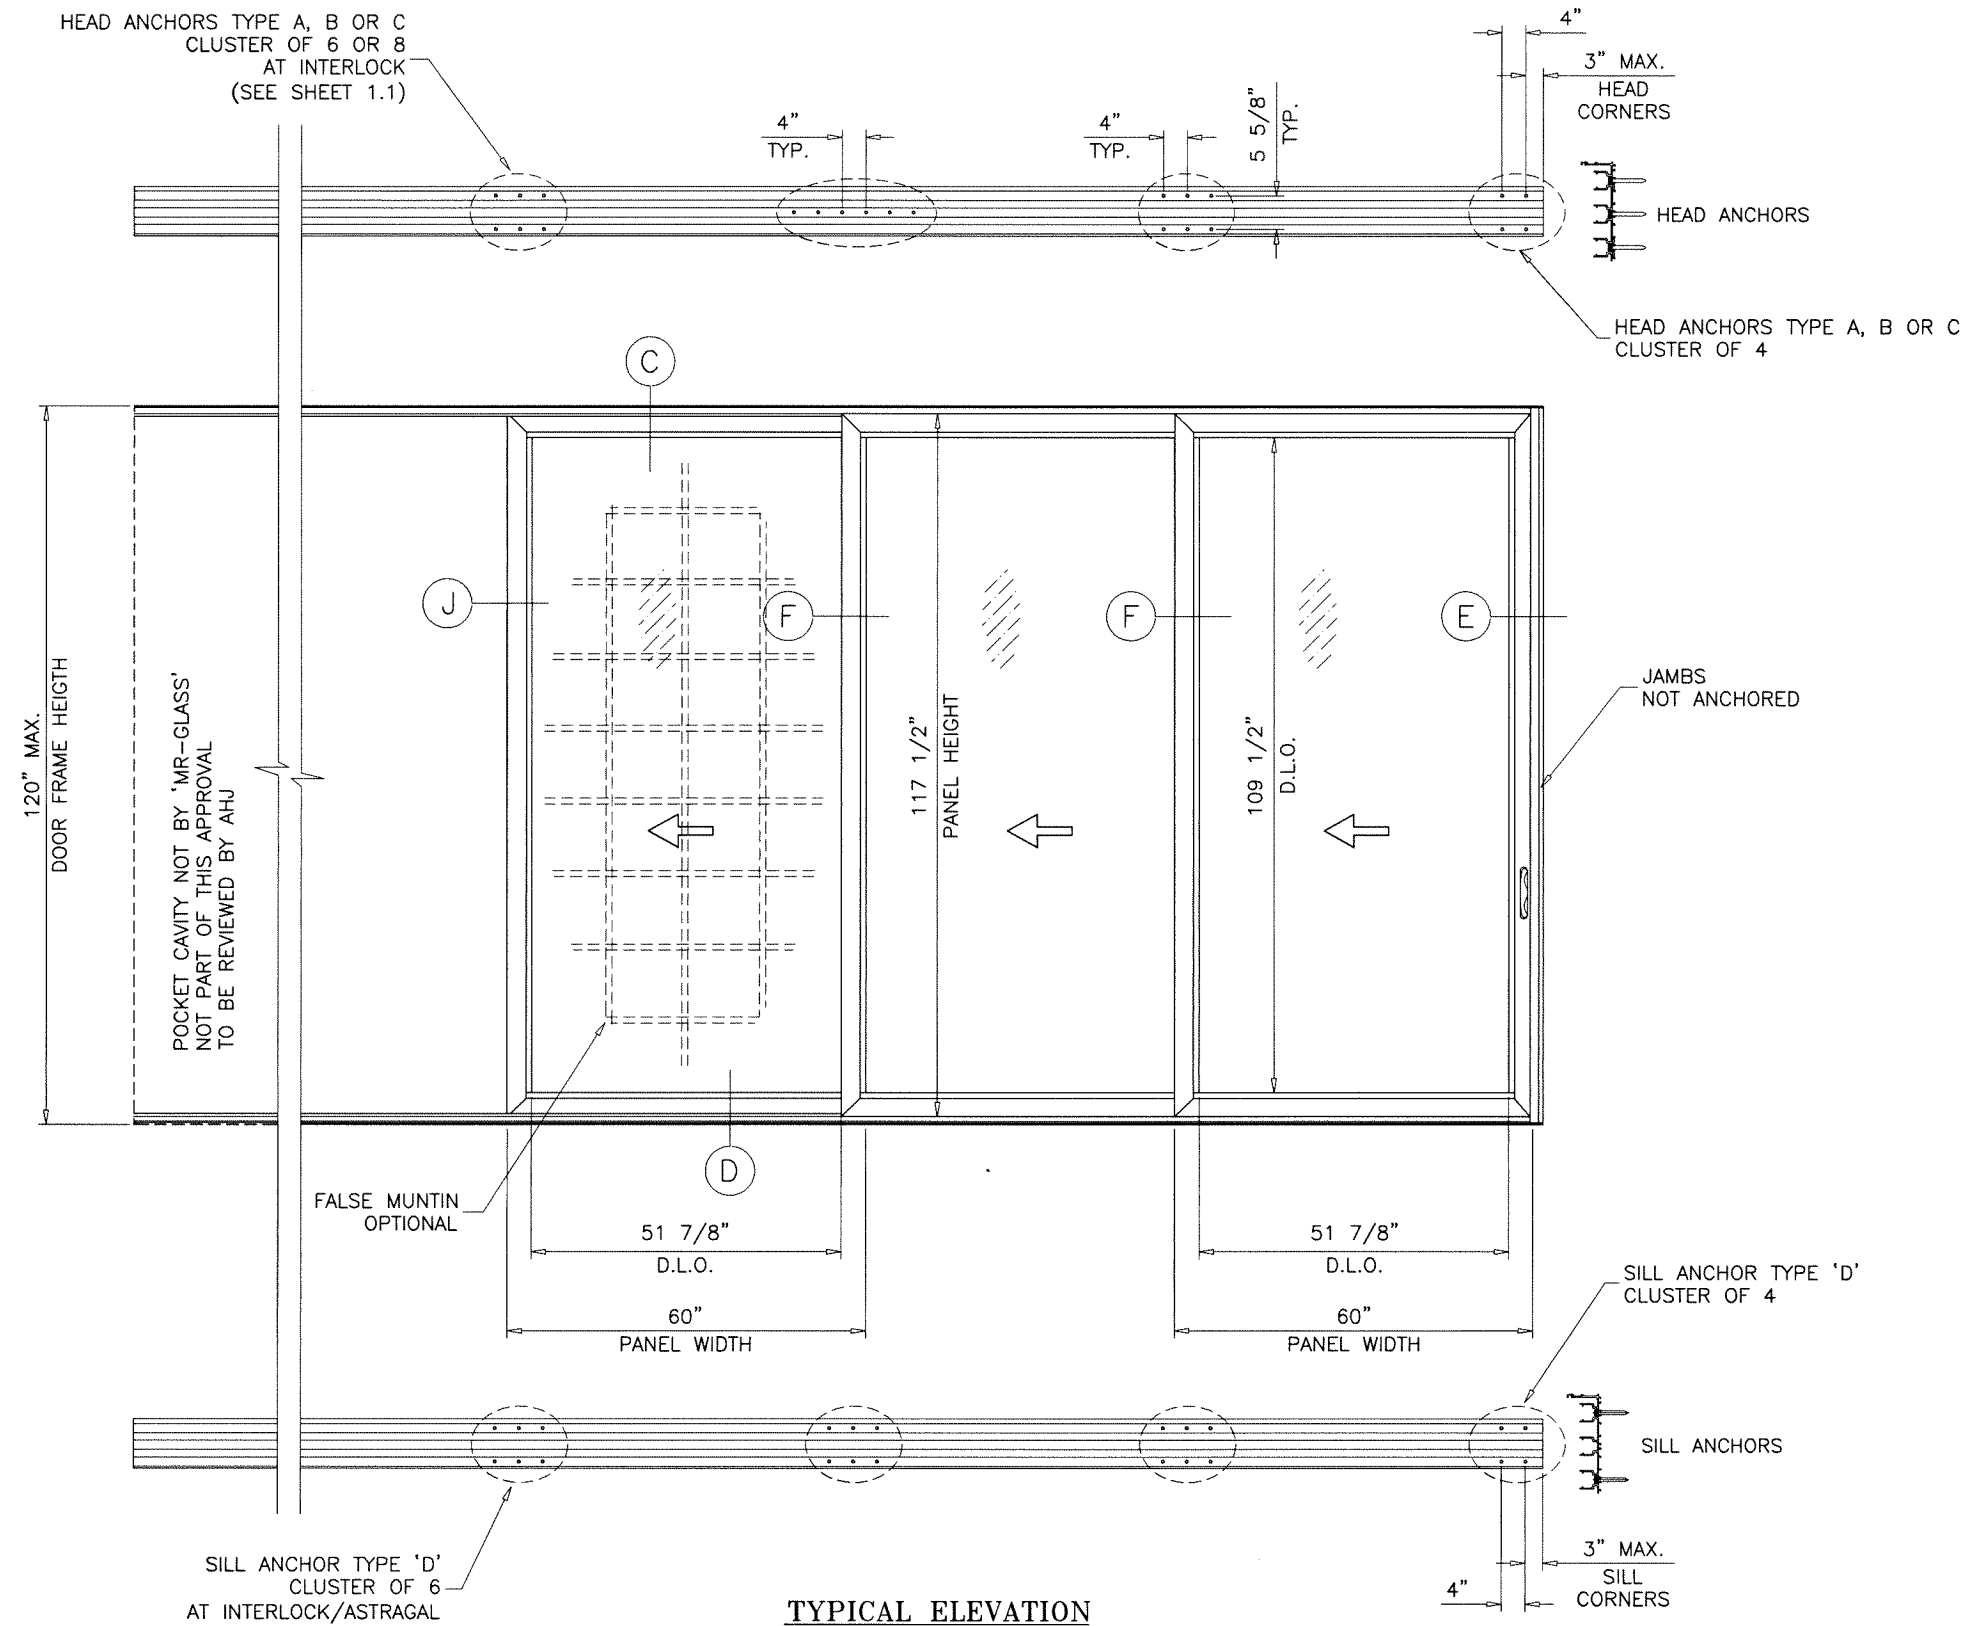

TYPICAL ELEVATION
TESTED UNIT
(POCKETED DOOR)

Sealed: 04/20/2021

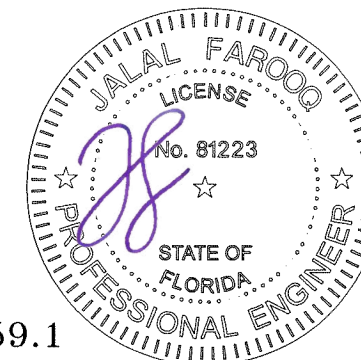


FL #25959.1

af c
AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978
COMP-ANL \ 18-06F-MG

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
8051 N.W. 79th Place
Medley, FL. 33166
Tel. (305) 764-3963 Fax. (305) 470-8285


no.	date	by	description

date: 12-28-17
scale: 3/8"=1'-0"
dr. by: TARIQ
chk. by:
drawing no. 18-06F
sheet 3.1 of 11


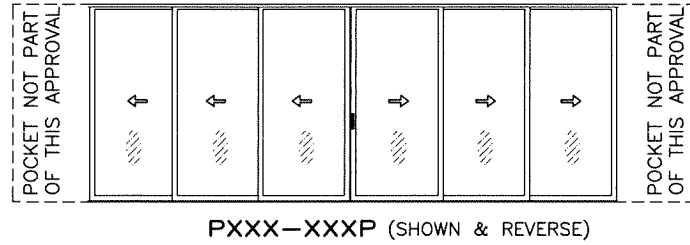


PXXX-XXXX (SHOWN & REVERSE)


**APPROVED CONFIGURATIONS
POCKETED DOORS**

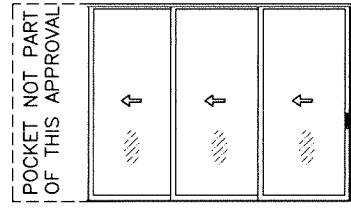

PXXX (SHOWN & REVERSE)
XXXX

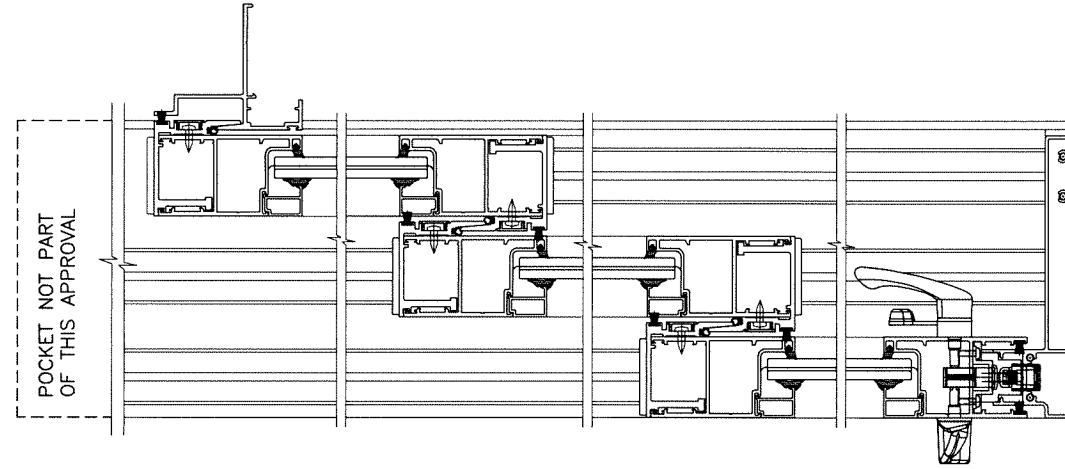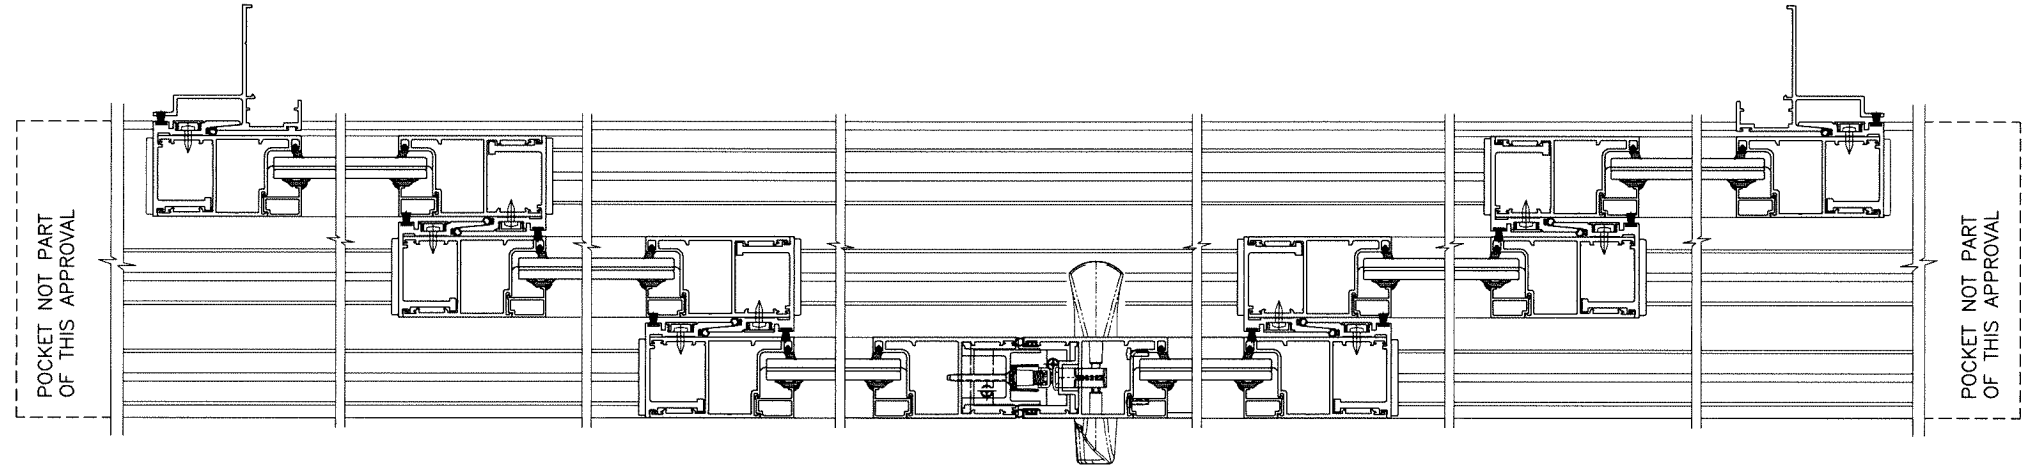

FL #25959.1


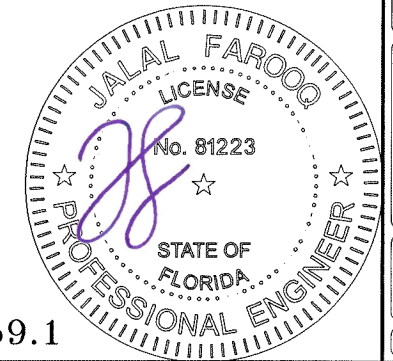


Sealed: 04/20/2021

date: 12-28-17	revisions:
scale: -	no date by description
dr. by: TARIQ	
chk. by:	
drawing no.	
18-06F	
sheet 4.1 of 11	

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
 8051 N.W. 79th Place
 Medley, FL. 33166
 Tel. (305) 764-3963 Fax. (305) 470-8285


AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220
 MIAMI, FLORIDA 33173 (C.A.N. 3538)
 TEL. (305) 264-8100 FAX. (305) 262-6978
 COMP-ANL \ 18-06F-MG

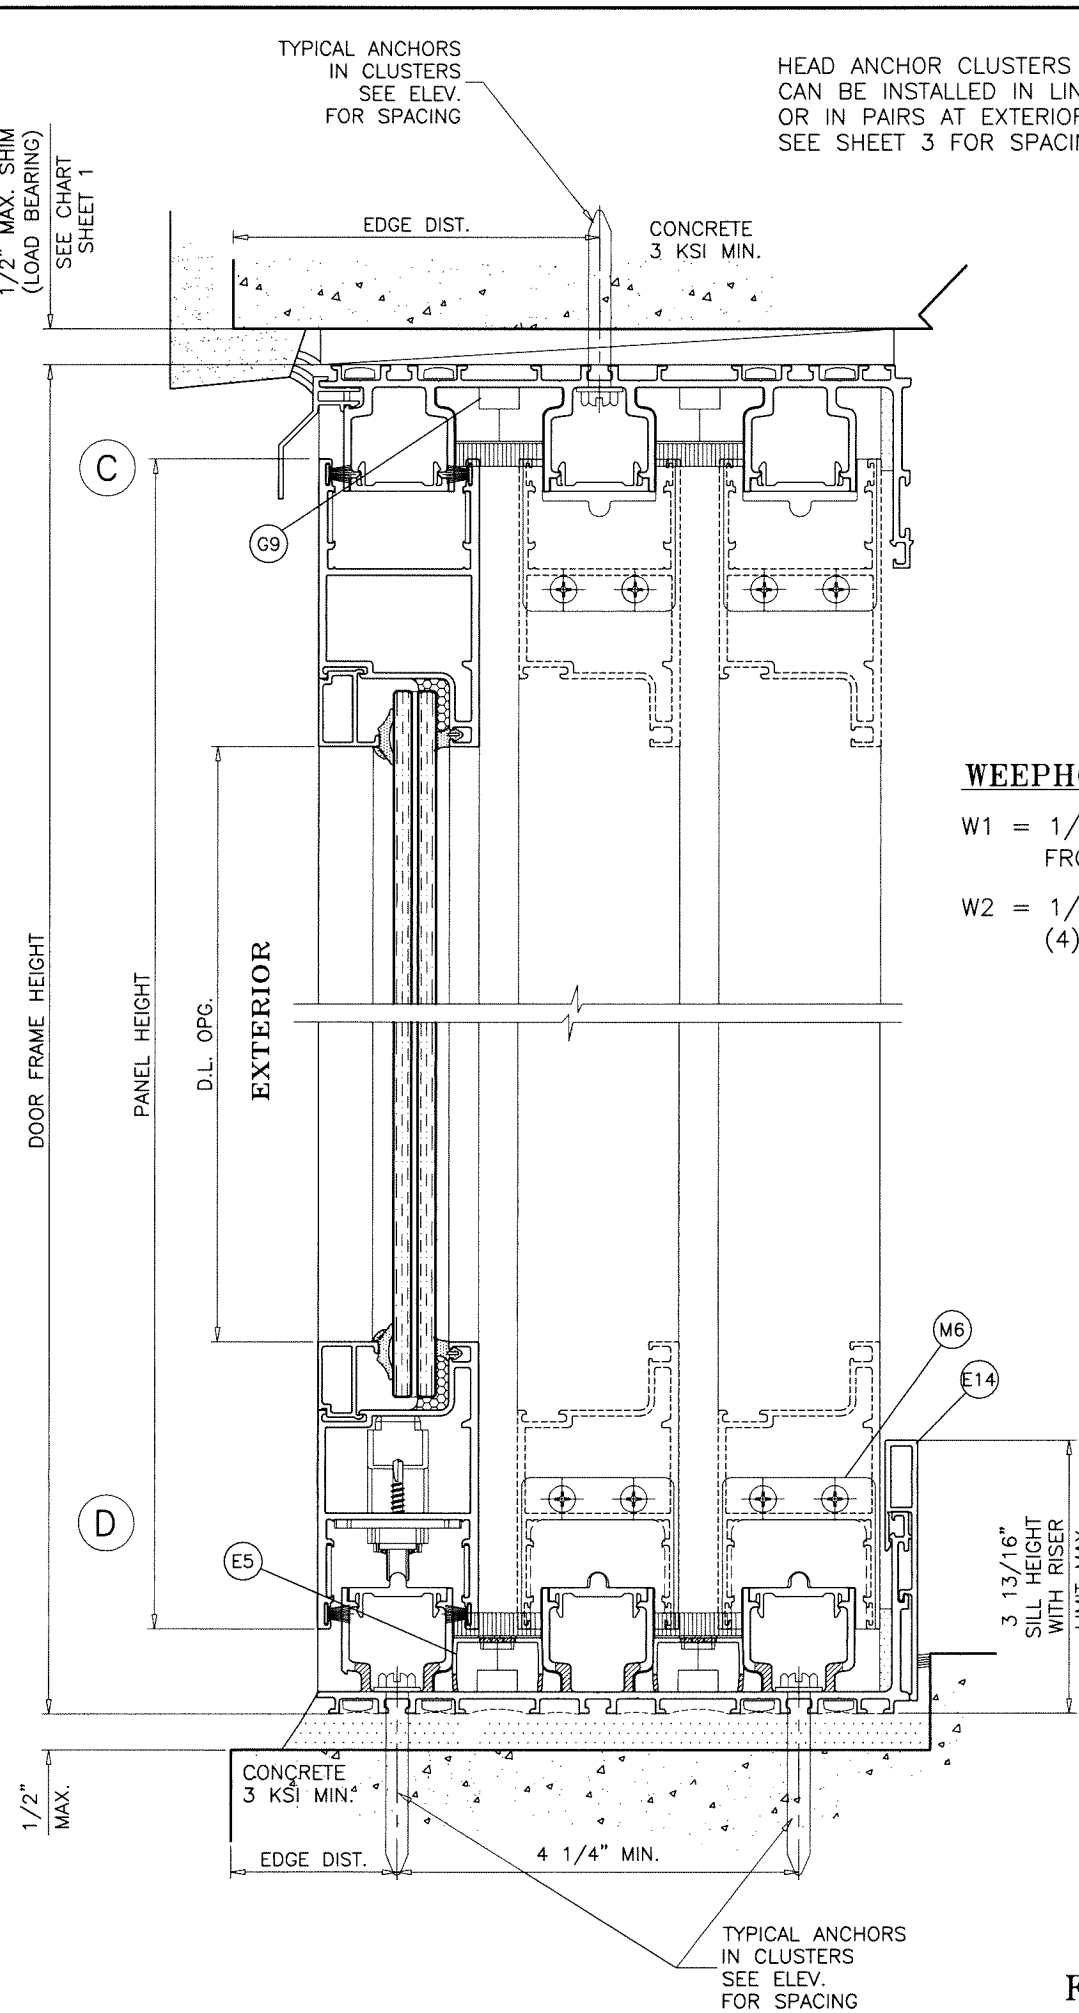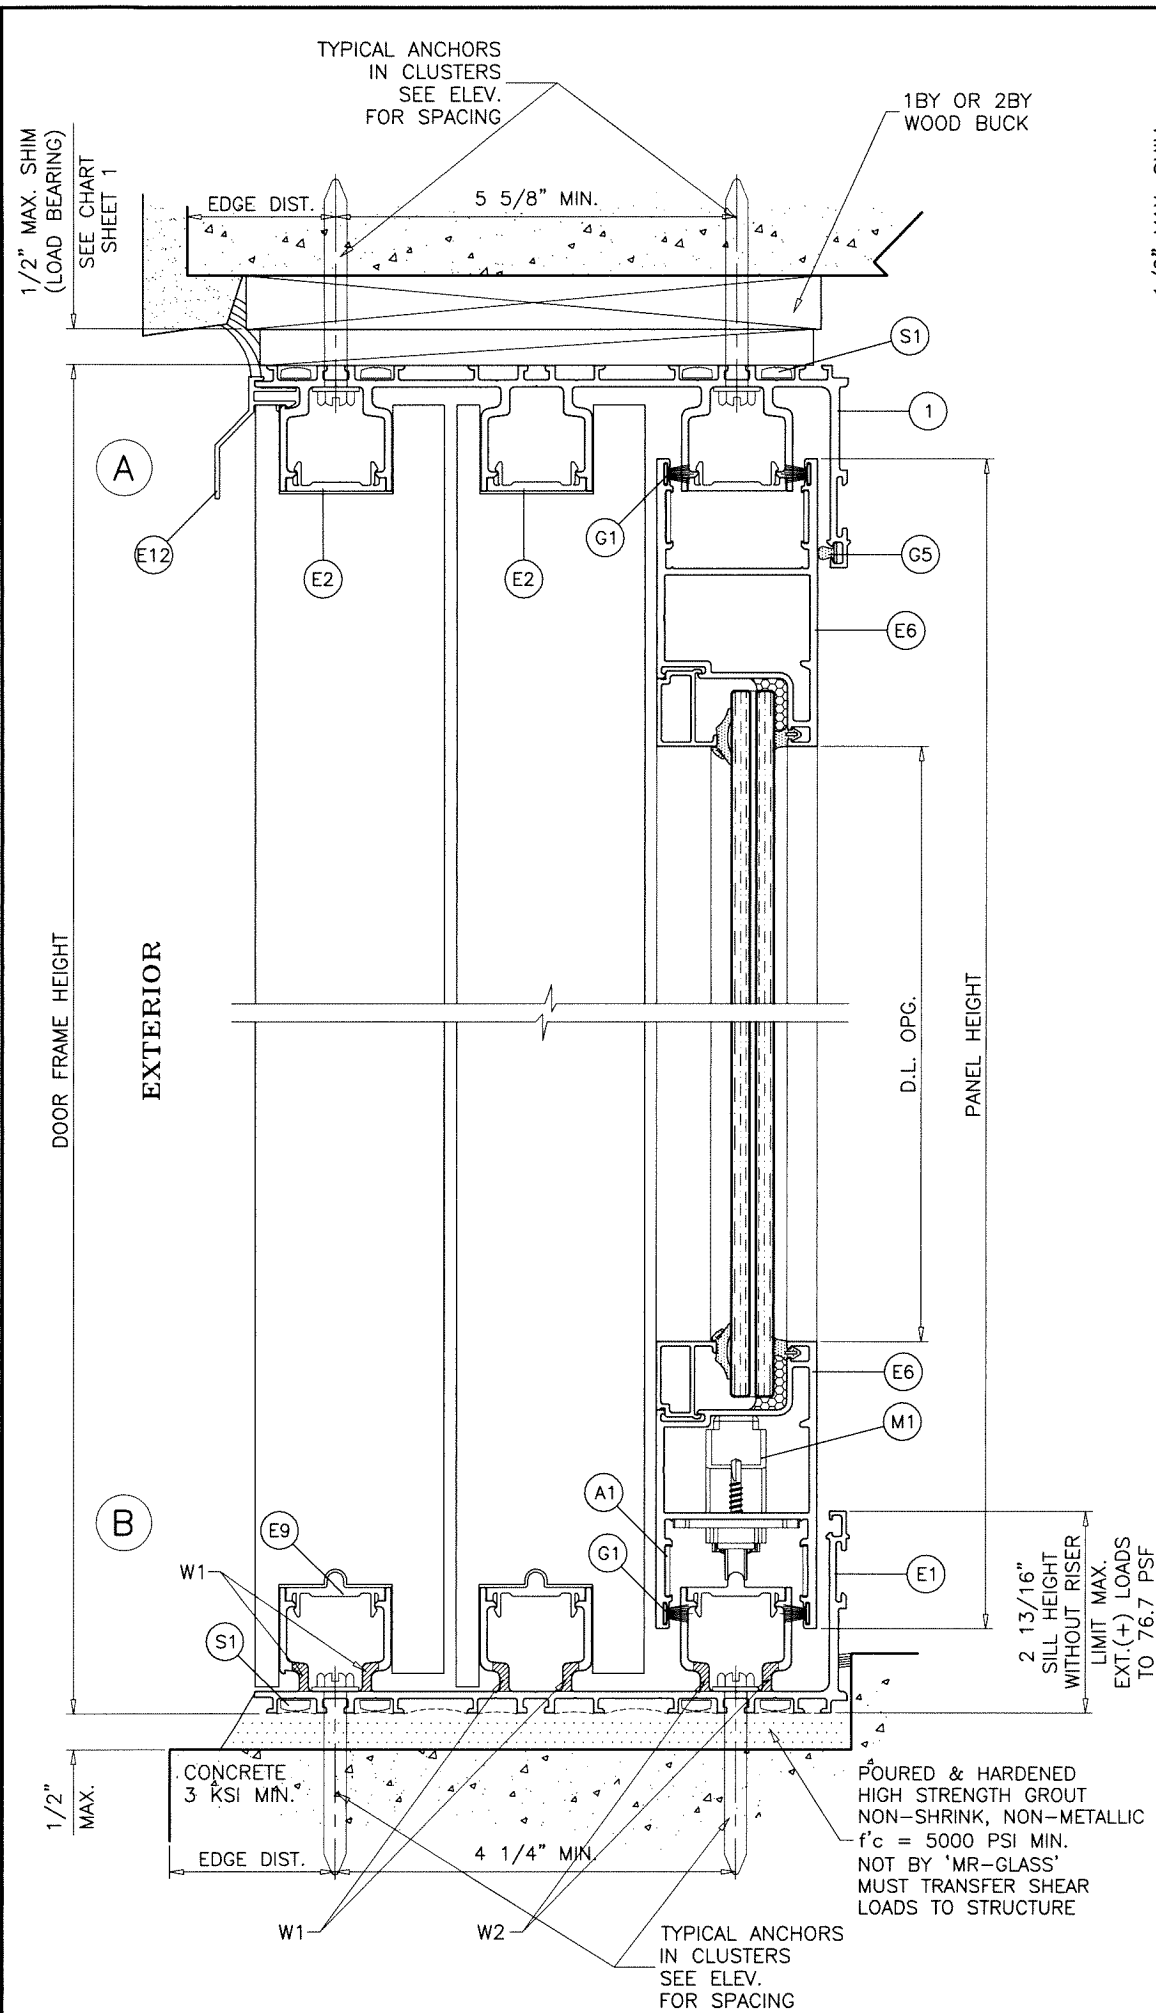

WEEPHOLES:

- W1 = 1/4" X 1-1/2" LONG WEEP HOLES AT 5" FROM EACH END AND 7" O.C.
- W2 = 1/4" X 1-1/2" LONG WEEP HOLES (4) AT MOV. PANEL AT 7" O.C.

Sealed: 04/20/2021

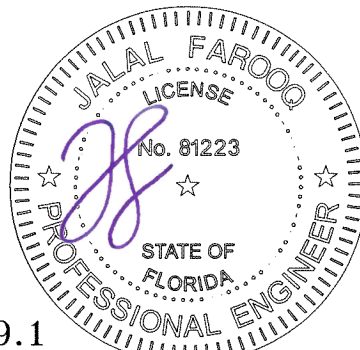




FL #25959.1

af c
AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
 MIAMI, FLORIDA 33173
 TEL. (305) 264-8100 FAX. (305) 262-6978
 COMP-ANL 18-06F-MG

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
 8051 N.W. 79th Place
 Medley, FL. 33166
 Tel. (305) 764-3963 Fax. (305) 470-8285

no	date	description

date: 12-28-17
 scale: 3/8" = 1"
 dr. by: TARIQ
 chk. by:
 drawing no. 18-06F
 sheet 5 of 11

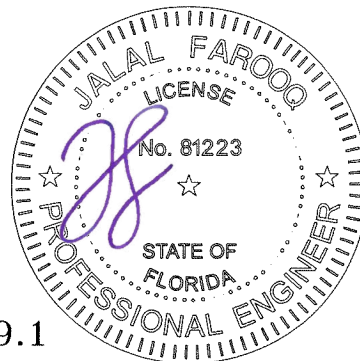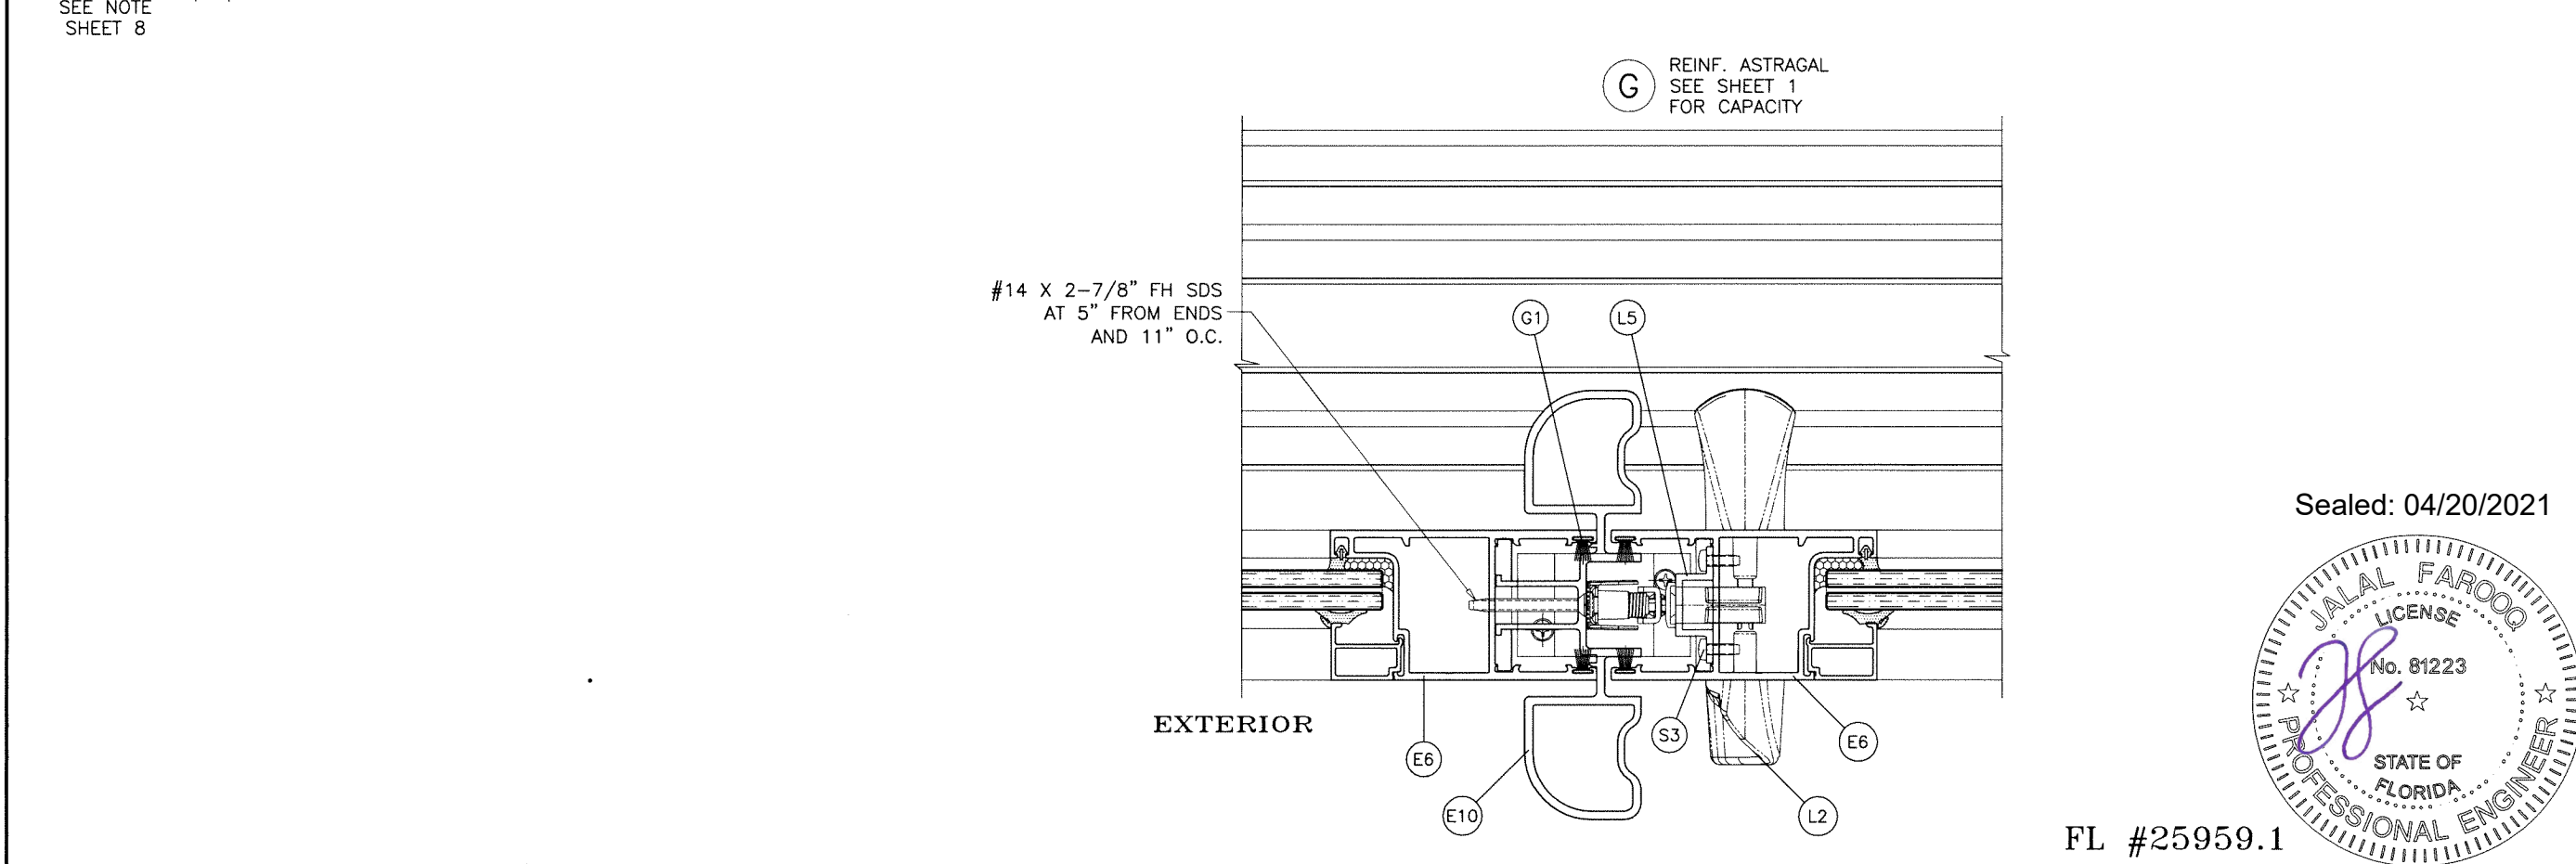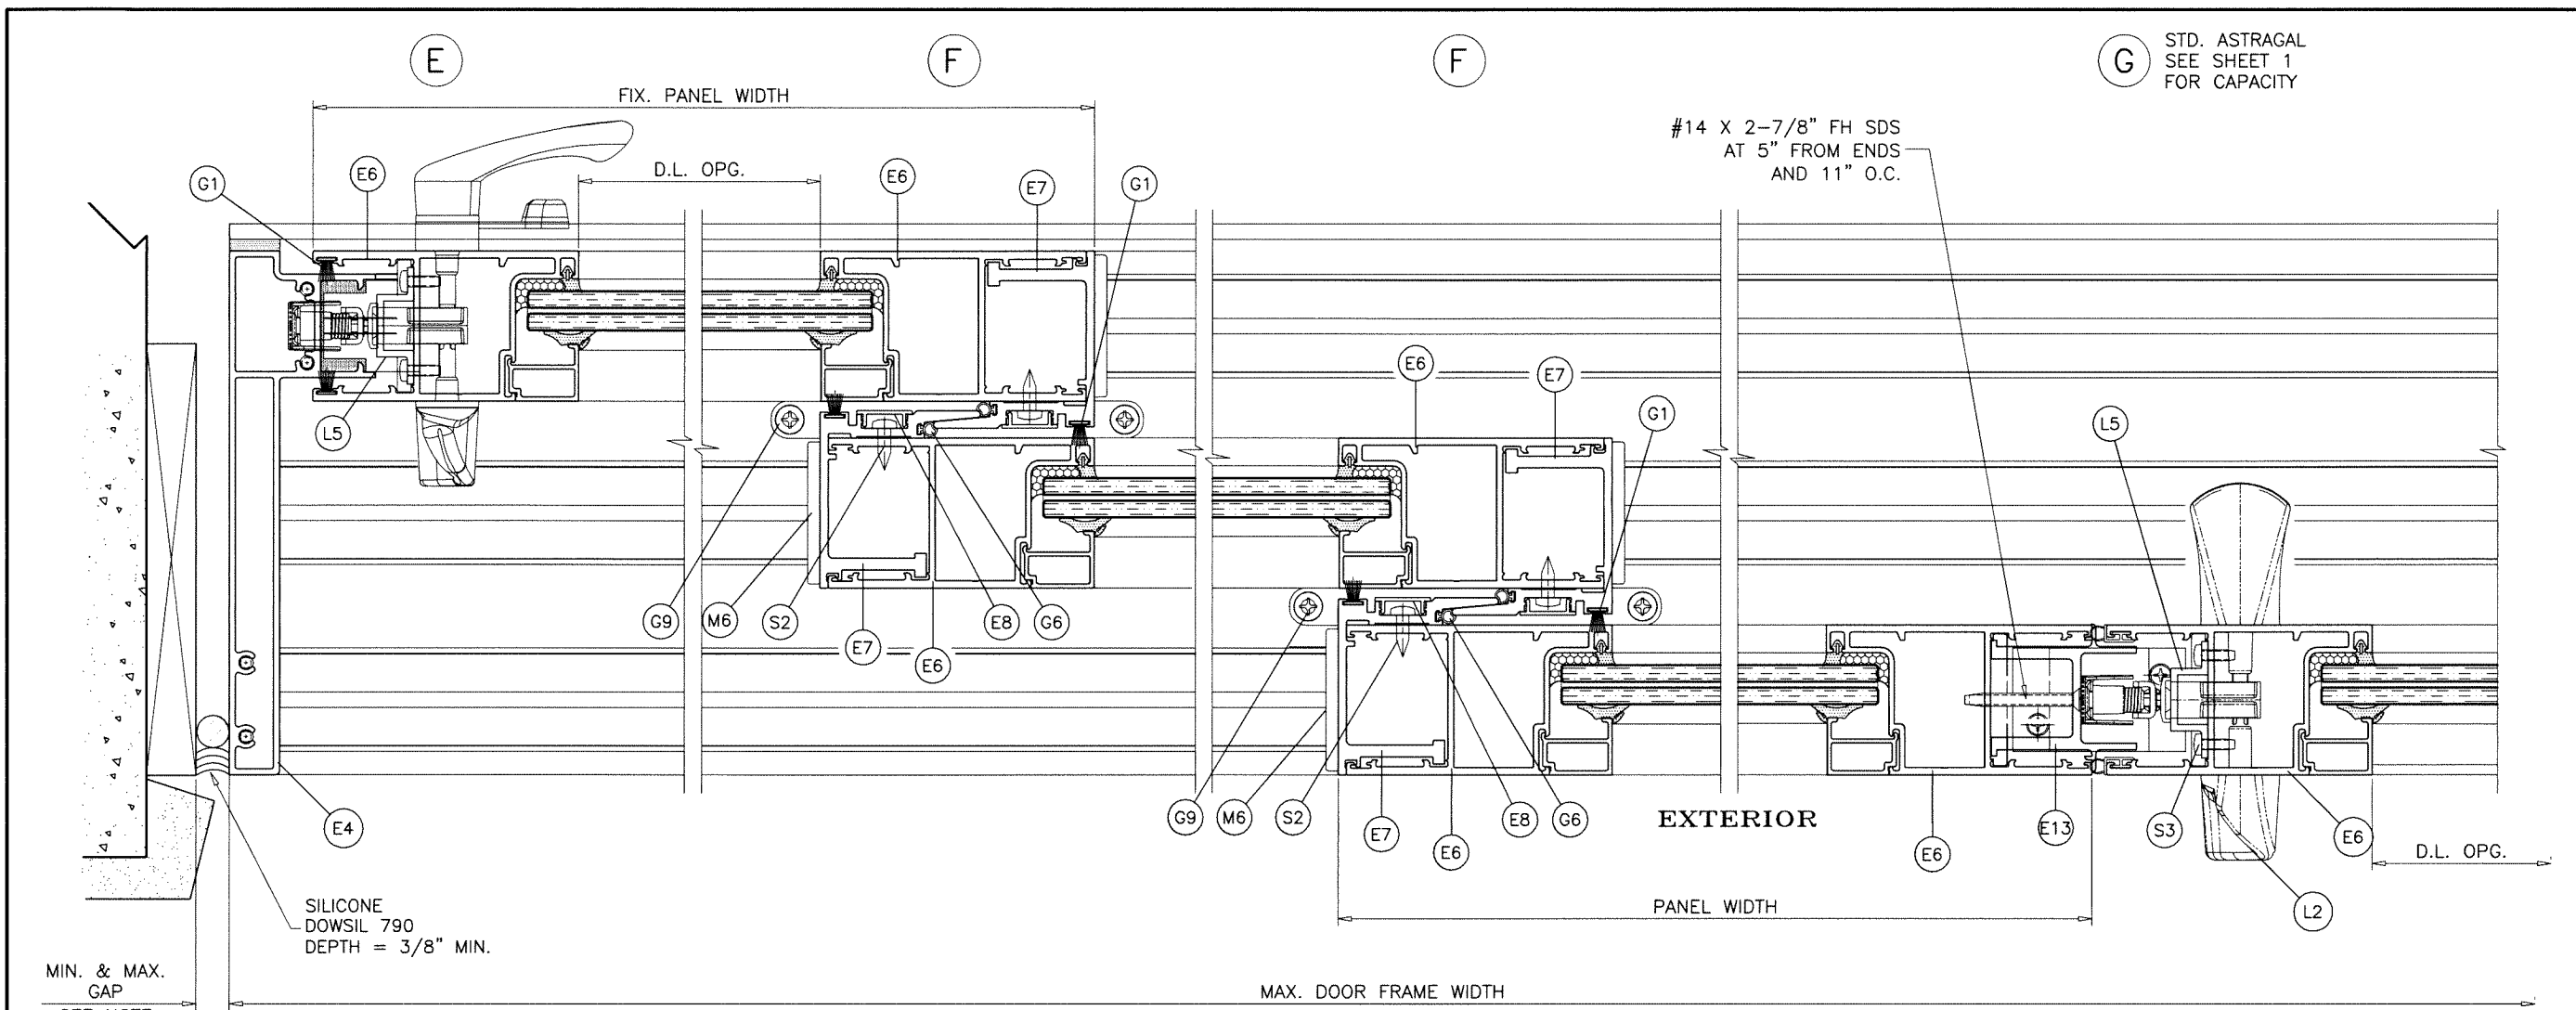

FL #25959.1


af c
AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
 MIAMI, FLORIDA 33173
 TEL. (305) 264-8100 FAX. (305) 262-6978
 COMP-ANL 18-06F-MG

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
 8051 N.W. 79th Place
 Medley, FL. 33166
 Tel. (305) 764-3963 Fax. (305) 470-8285

revisions:	no.	date	by	description

date: 12-28-17	scale: 3/8" = 1"	dr. by: TARIO	chk. by:
drawing no. 18-06F			
sheet 7 of 11			

Sealed: 04/20/2021

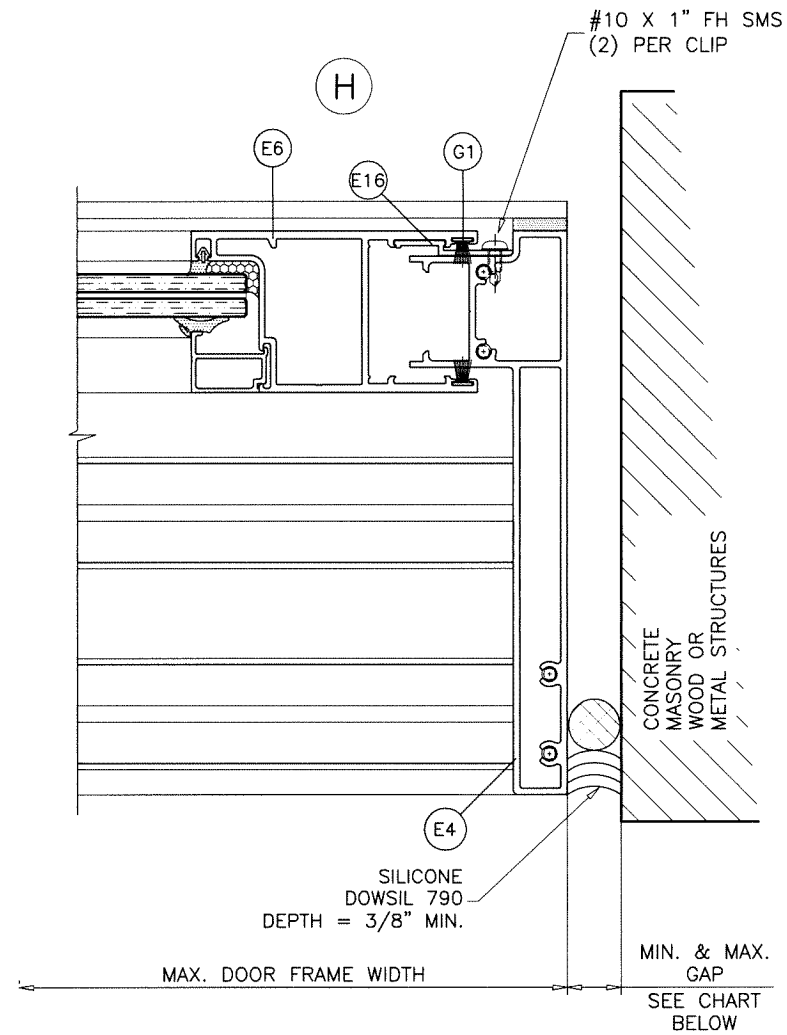


MAX. FRAME HEIGHT	GAP	
	MIN.	MAX.
96"	5/16"	3/4"
108"	3/8"	3/4"
120"	7/16"	3/4"

NOTE:
 MAX. MOVEMENT CONSIDERED=100% STRETCH.
 PLEASE REFER TO SEALANT MANUFACTURER'S DATA AND APPLICATION MANUAL FOR COMPATABILITY OF SEALANT TO SUBSTRATE & WINDOW WALL MATERIAL/FINISH AND COMPLIANCE FOR WARRANTY.
 REFER TO ACI-117-10 FOR CONSTRUCTION TOLERANCES.

ALTERNATE SEALANTS AT JAMB GAPS CAN BE DESIGNED BY ENGINEER OF RECORD BASED ON MANUFACTURER GUIDE LINES.

GAPS LESS THAN 1/4" MAY BE DESIGNED BY ENGINEER OF RECORD BY THE USE OF BOND BREAKER TAPE OR 15% OF GAP ALLOWED MOVEMENT.

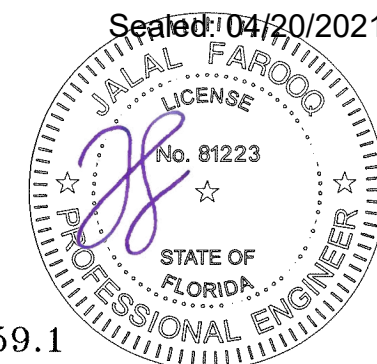

FL #25959.1

af c
AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
 MIAMI, FLORIDA 33173 FAX. (305) 262-6978
 TEL. (305) 264-8100


SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
 8051 N.W. 79th Place
 Medley, FL. 33166
 Tel. (305) 764-3963 Fax. (305) 470-8285

revisions:	no	date	by	description


date: 12-28-17
 scale: 3/8" = 1"
 dr. by: TARIO
 chk. by:

drawing no.
18-06F
 sheet 8 of 11


COMP-ANL \ 18-06F-MG

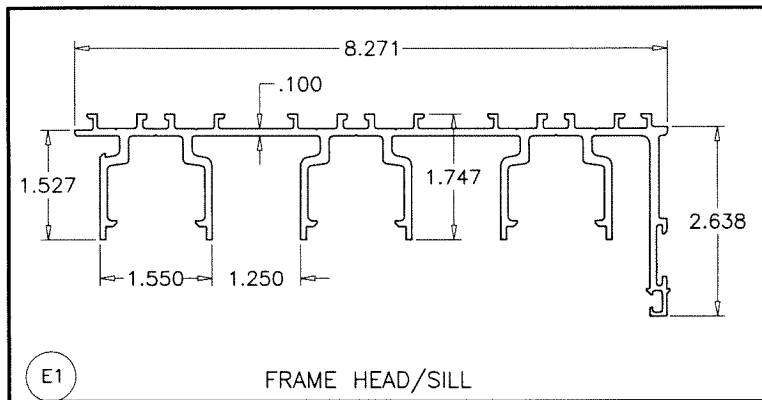


E1 FRAME HEAD/SILL

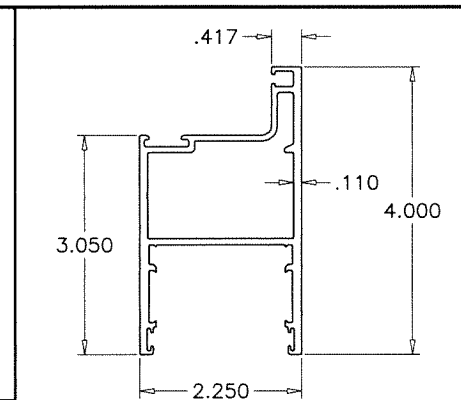


E6 PANEL RAIL/STILE

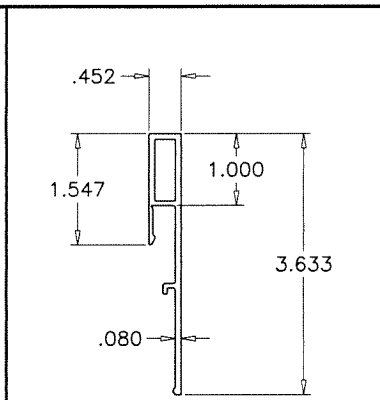


E14 SILL RISER

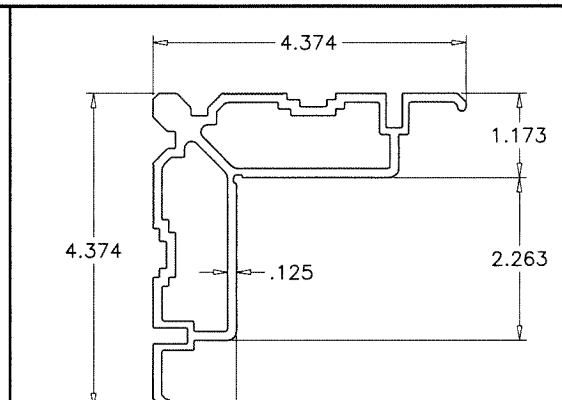


A3 CORNER KEY

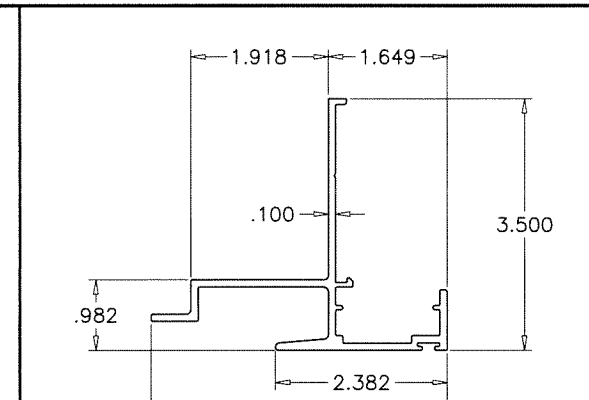


E17 HOOK STRIP

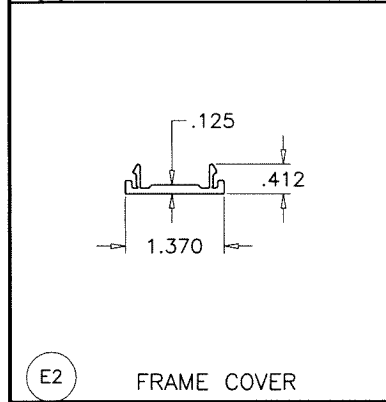


E2 FRAME COVER

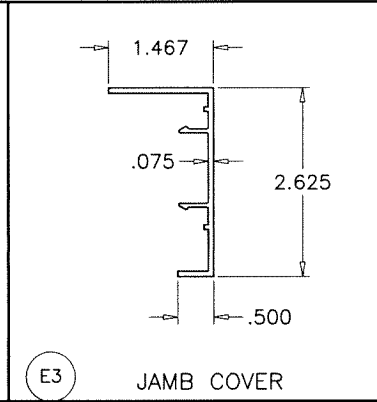


E3 JAMB COVER

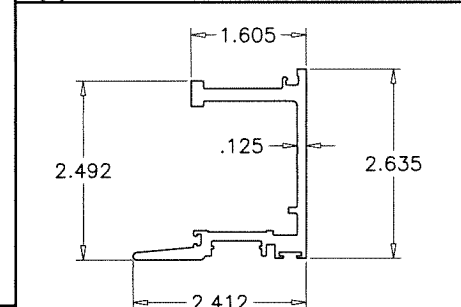


E7 PANEL INTERLOCK

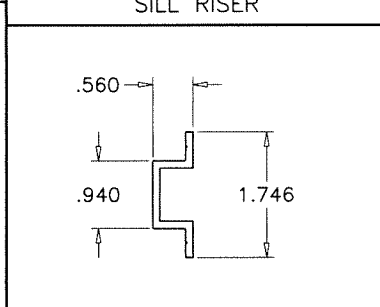


L5 LOCK RECIEVER

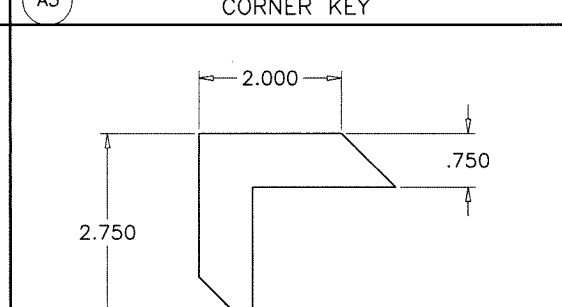


A1 ALIGNMENT CORNER

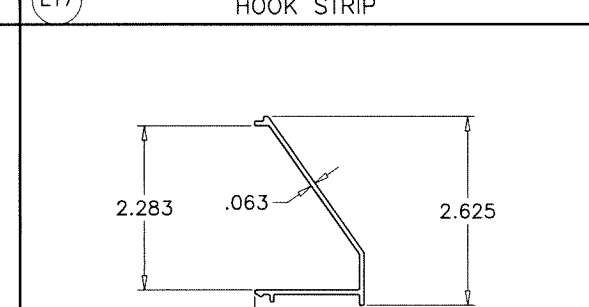


E18 HOOK STRIP COVER

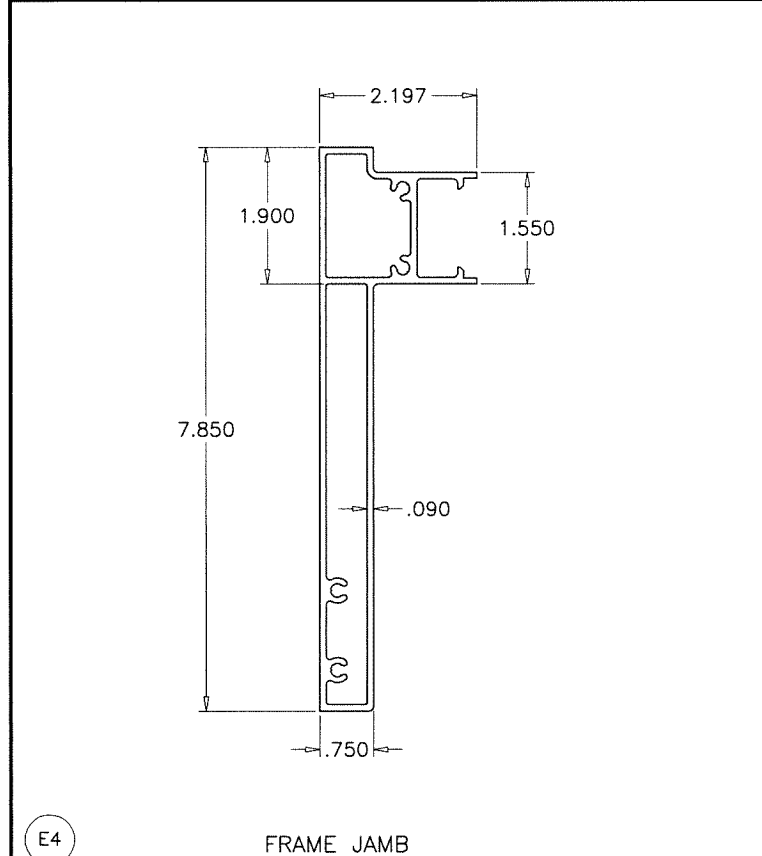


E4 FRAME JAMB

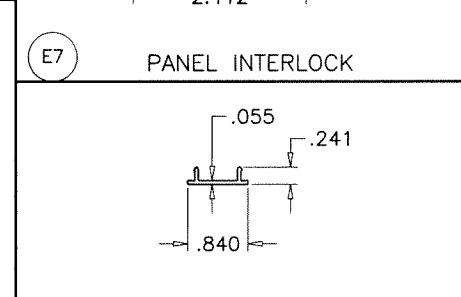


E8 INTERLOCK COVER

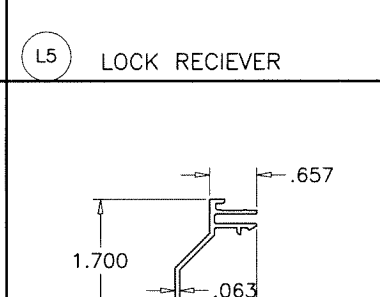


E12 GUTTER

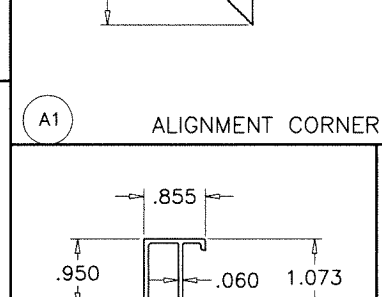


E11 GLASS STOP (LAM. GLASS)

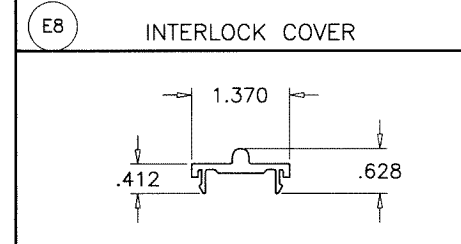


E9 TRACK

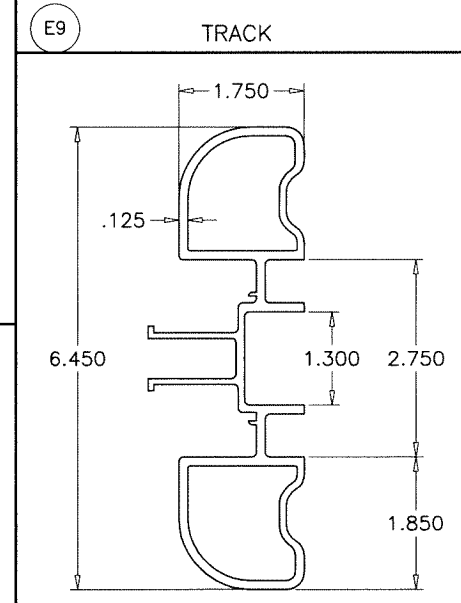


E10 REINF. ASTRAGAL

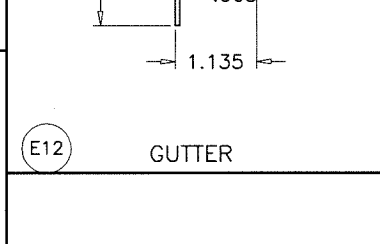

E13 STD. ASTRAGAL

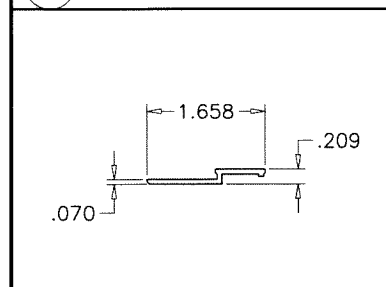

E16 FIXED PANEL CLIP

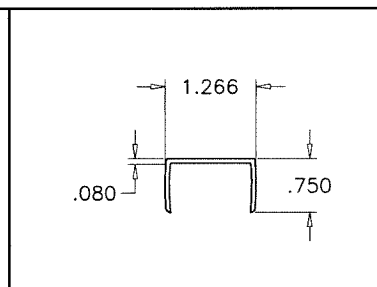

E5 SILL COVER


af c
AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
 MIAMI, FLORIDA 33173 TEL. (305) 262-6978
 TEL. (305) 264-8100 FAX. (305) 262-6978
 COMP-ANL\18-06F-MG

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
 8051 N.W. 79th Place
 Medley, FL. 33166
 Tel. (305) 764-3963 Fax. (305) 470-8285

no	date	by	description

date: 12-28-17
 scale: 3/8" = 1"
 dr. by: TARIQ
 chk. by:
 drawing no. 18-06F
 sheet 9 of 11

Sealed: 04/20/2021

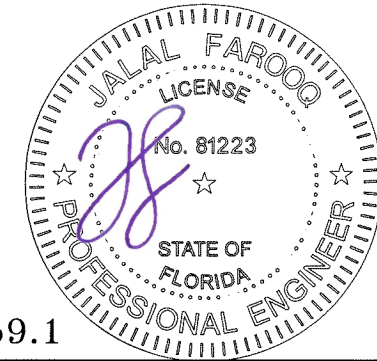

FL #25959.1

ITEM #	PART #	QUANTITY	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS
E1	E-1101	2	FRAME HEAD/SILL	6063-T6	-
E2	E-1008	AS REQD.	FRAME COVER	6063-T5	-
E3	-	AS REQD.	JAMB COVER	6063-T5	-
E4	E-1102	2	FRAME JAMB	6063-T6	-
E5	E-9006	AS REQD.	SILL COVER	6063-T5	-
E6	E-1010	AS REQD.	PANEL RAIL/STILE	6005-T5	-
E7	E-1011	AS REQD.	PANEL INTERLOCK	6005-T5	-
E8	E-1018	AS REQD.	INTERLOCK COVER	6063-T5	-
E9	E-1007	1/ MOV. PANEL	TRACK	6063-T5	-
E10	E-1013	AS REQD.	REINF. ASTRAGAL	6005-T5	-
E11	E-9001	4/ PANEL	GLASS STOP (LAM. GLASS)	6063-T6	-
E12	E-1016	AS REQD.	GUTTER	6063-T5	-
E13	E-1012	AS REQD.	STD. ASTRAGAL	6005-T5	-
E14	E-1014	AS REQD.	3-5/8" SILL RISER	6063-T6	-
E16	E-1021	3/ PANEL	FIXED PANEL CLIP, AT 17" FROM ENDS & 40" O.C.	6063-T5	EACH FASTENED WITH (2) #10 X 1" FH SMS
E17	E-1022	AS REQD.	HOOK STRIP	6063-T6	-
E18	E-9008	AS REQD.	HOOK STRIP COVER	6063-T6	-
G1	W71325NK	AS REQD.	TRI FIN PILE W'STRIPPING	-	ULTRAFAB
G2	-	AS REQD.	COMPRESSION GASKET	EPDM	DUROMETER 70±5 SHORE A
G3	G10-03	AS REQD.	OFFSET GLAZING GASKET	SANTOPRENE	DUROMETER 70±5 SHORE A
G4	G10-04	AS REQD.	WEDGE GASKET	EPDM	DUROMETER 70±5 SHORE A
G5	G10-06	AS REQD.	AIR SEAL GASKET	SANTOPRENE	ULTRAFAB
G6	G10-06	AS REQD.	INTERLOCK GASKET	POLYPROPYLENE	ULTRAFAB
G8	-	-	1/4" THK. FOAM PAD	POLYETHYLENE	-
G9	G10-09	-	AIR SEAL BRIDGE AT INTERLOCK	POLYAMIDE	-
G10	-	-	AIR SEAL BRIDGE AT MTG. STILE	POLYAMIDE	-
G11	-	AS REQD.	SETTING BLOCKS	EPDM	DUROMETER 80±5 SHORE A
A1	A10-01	-	ALIGNMENT CORNER	6063-T5	-
A3	E-9005	-	CORNER KEY	6063-T6	-
L1	L10-01	-	2 POINT MORTISE LOCK & HANDLE	-	INTERLOCK
L2	PS01-7102	-	2 POINT MORTISE LOCK & HANDLE	-	INTERLOCK
L3	PS01-1005	-	ADJUSTABLE STRIKER	-	INTERLOCK
L5	E-1017	-	LOCK RECIEVER	6063-T5	-
M1	M10-10A	2 PANEL	ROLLER ASSEMBLY AT 9" FROM ENDS	ST. STEEL/ACETAL	FASTENED WITH (2) 12-24 X 3/4" PH MS
M6	M10-06	AS REQD.	PANEL GUIDES	NYLON	-
M7	M10-07	AS REQD.	PANEL GUIDES	NYLON	-
S1	#12 X 1 1/2"	4/ CORNER	FRAME ASSEMBLY FASTENERS	ST. STEEL	HWH SDS
S2	10-24 X 1/2"	AS REQD.	INTERLOCK FASTENERS, AT 6" FROM ENDS AND 12" O.C.	ST. STEEL	PH TC MS
S3	#8-18 X 1/2"	AS REQD.	LOCK RECIEVER FASTENERS	AISI 304	PHILIP PH SMS
S4	#10 X 1/2"	AS REQD.	PANEL ASSEMBLY FASTENERS	ST. STEEL	FH SMS

SEALANT:

ALL JOINTS AND FRAME CONNECTIONS SEALED WITH WHITE/ALUMINUM COLORED SILICONE.

LOCKS:

SURFACE MOUNT METALLIC THREE PLY DUAL HOOK LOCK AT 38-1/2" FROM BOTTOM FASTENED TO LOCK STILE WITH (2) 10-24 X 1/2" FH TC MS

SURFACE MOUNT METALLIC HANDLE AT 38-1/2" FROM BOTTOM FASTENED TO LOCK STILE WITH (2) 8-32 X 2-5/8" FH MS

SURFACE MOUNT METALLIC KEEPER FACING LOCK AT 38 1/2" FROM BOTTOM FASTENED WITH (1) #14 X 2-7/8" FH SDS AND (1) 12-24 X 1/2" PH MS


af c
AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
 MIAMI, FLORIDA 33173
 TEL. (305) 262-6978 FAX. (305) 262-6978
 COMP-ANL \ 18-06F-MG

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
 8051 N.W. 79th Place
 Medley, FL. 33166
 Tel. (305) 764-3963 Fax. (305) 470-8285

no	date	by	description


date: 12-28-17
 scale: 3/8" = 1"
 dr. by: TARIQ
 chk. by:

Sealed: 04/20/2021

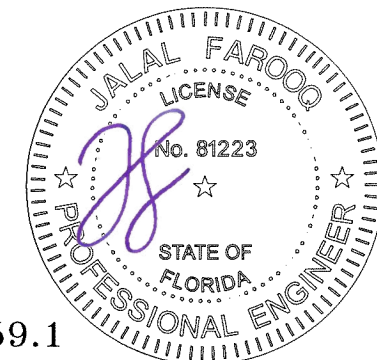


FL #25959.1

drawing no.
18-06F
 sheet 10 of 11

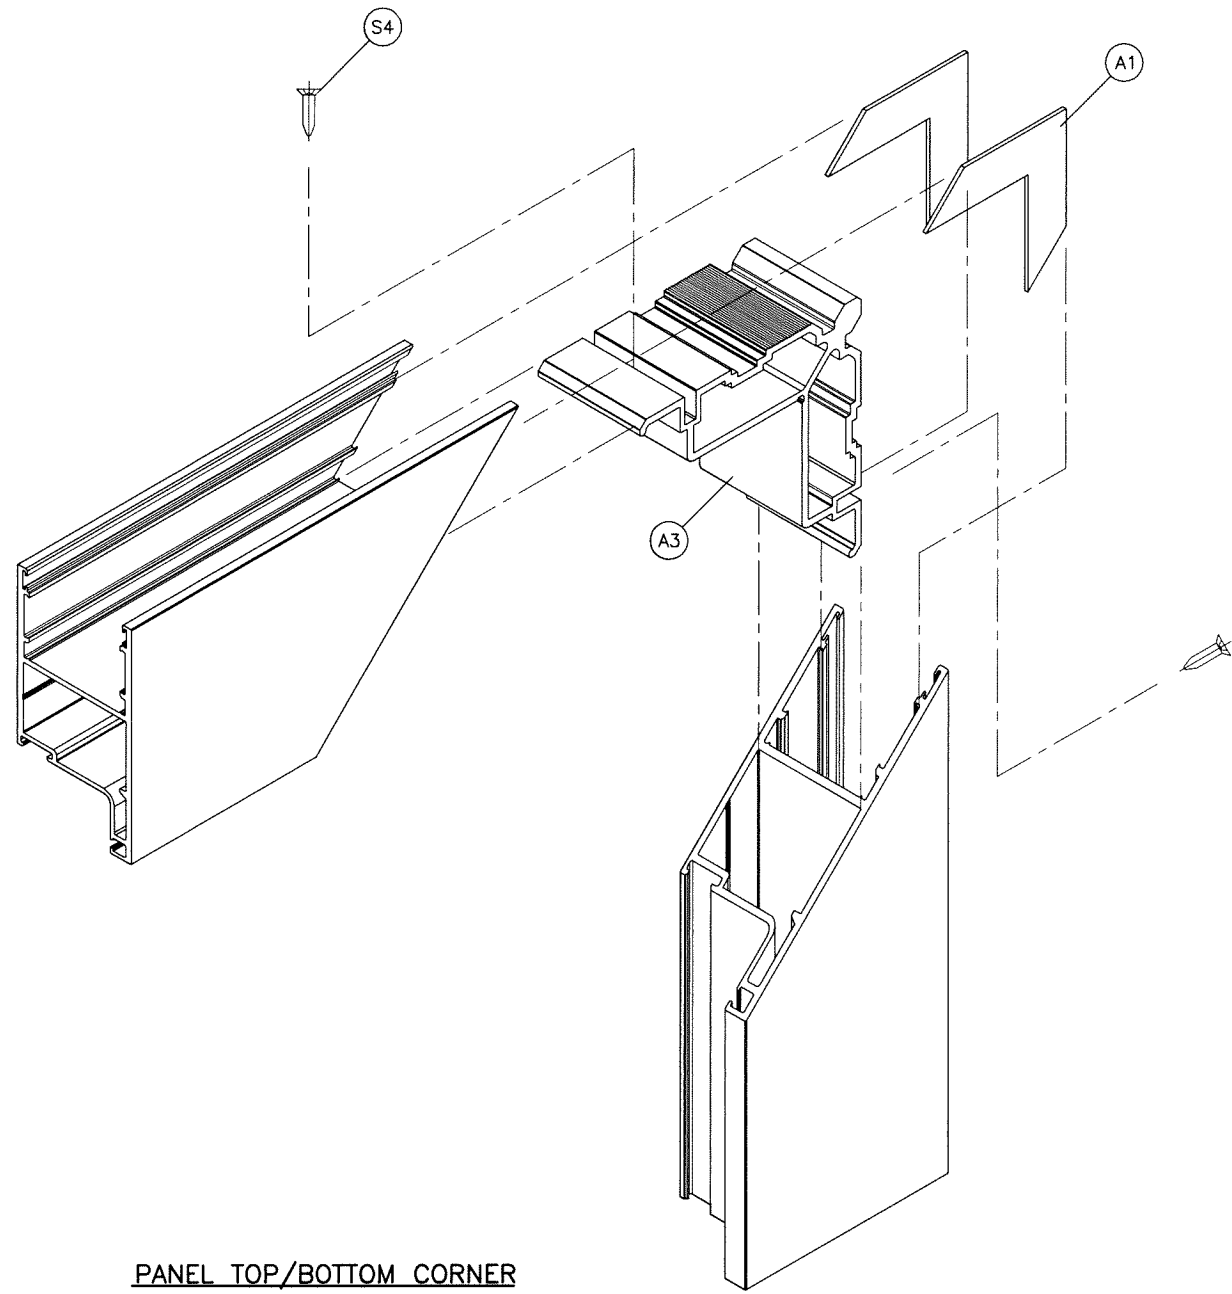


PANEL TOP/BOTTOM CORNER

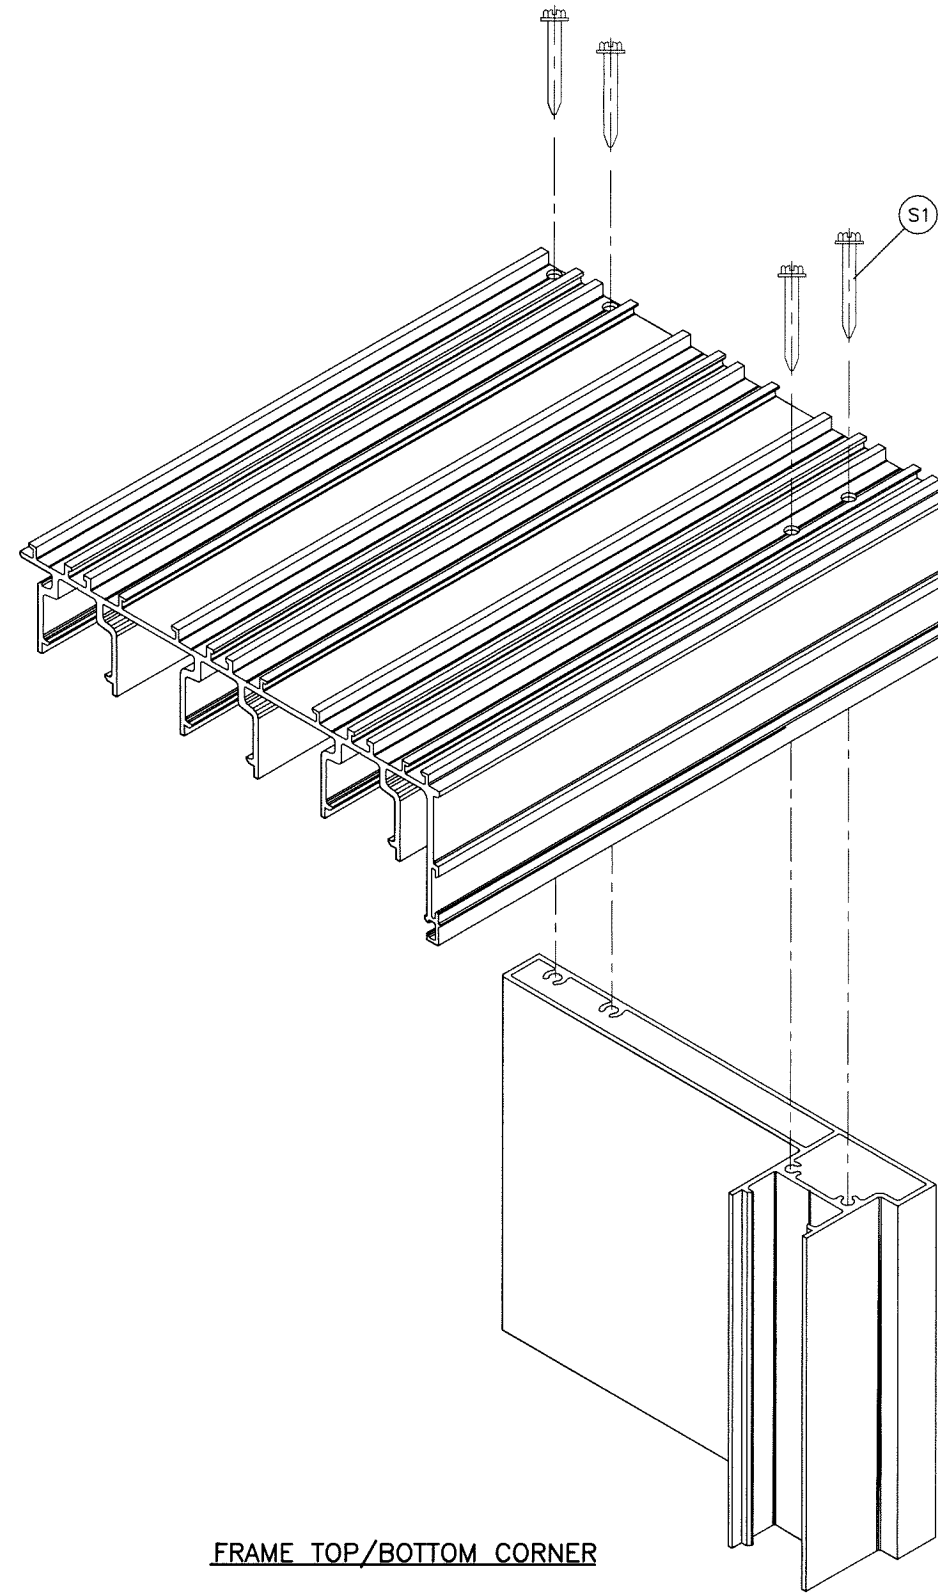

FRAME TOP/BOTTOM CORNER

Sealed: 04/20/2021

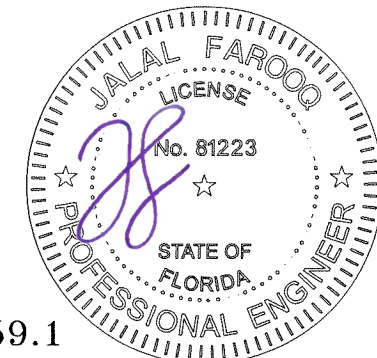

FL #25959.1

afc
AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 9360 SUNSET DRIVE, SUITE 220 (C.A.N. 3538)
 MIAMI, FLORIDA 33173
 TEL. (305) 264-8100 FAX. (305) 262-6978
 COMP-ANL \ 18-06F-MG

SERIES 1100 ALUM SLIDING GLASS DOOR (L.M.I.)
MR-GLASS DOORS & WINDOWS MANUFACTURING, LLC
 8051 N.W. 79th Place
 Medley, FL. 33166
 Tel. (305) 764-3963 Fax. (305) 470-8285

revisions:	no	date	by	description
date:	12-28-17			
scale:	3/8" = 1"			
dr. by:	TARIQ			
chk. by:				
drawing no.	18-06F			
sheet	11 of 11			