


# CURRIES FLUSH PAIRS OF DOORS

PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE (HVHZ).  
LARGE MISSILE IMPACT (LMI) - LEVEL "E"

## INSTRUCTIONS FOR USING THIS APPROVAL

- STEP 1:** USE THE DOOR ELEVATIONS PROVIDED ON SHEET 2 TO DETERMINE THE APPLICABLE ASSEMBLY NUMBER
- STEP 2:** MOVE TO THE CHART BELOW THE DOOR ELEVATIONS, ALSO ON SHEET 2, AND LOCATE YOUR ASSEMBLY NUMBER. BY SCANNING HORIZONTALLY THROUGH THE SAME ROW OF YOUR ASSEMBLY NUMBER, YOU WILL BE ABLE TO DETERMINE THE APPROVED DOOR SERIES, MIN. DOOR GAUGE, MAX. DESIGN PRESSURE, MAX DOOR OPENING, SWINGING OPTIONS, AND LATCHING HARDWARE FOR BOTH ACTIVE AND INACTIVE PANELS.
- STEP 3:** USE SHEET 3 TO DETERMINE YOUR FRAMING PROFILE AND FRAMING CONSTRUCTION OPTIONS
- STEP 4:** USE THE TABLE(S) ON SHEET 4 TO DETERMINE THE ANCHOR TYPE AND SPACING, BASED ON YOUR PRESSURE AND SUBSTRATE CRITERIA
- STEP 5:** USE THE DETAILS PROVIDED ON SHEET 5 AND THE ADDITIONAL WEATHERSTRIPPING NOTES ON SHEET 6 TO DETERMINE YOUR WEATHERSTRIPPING OPTIONS

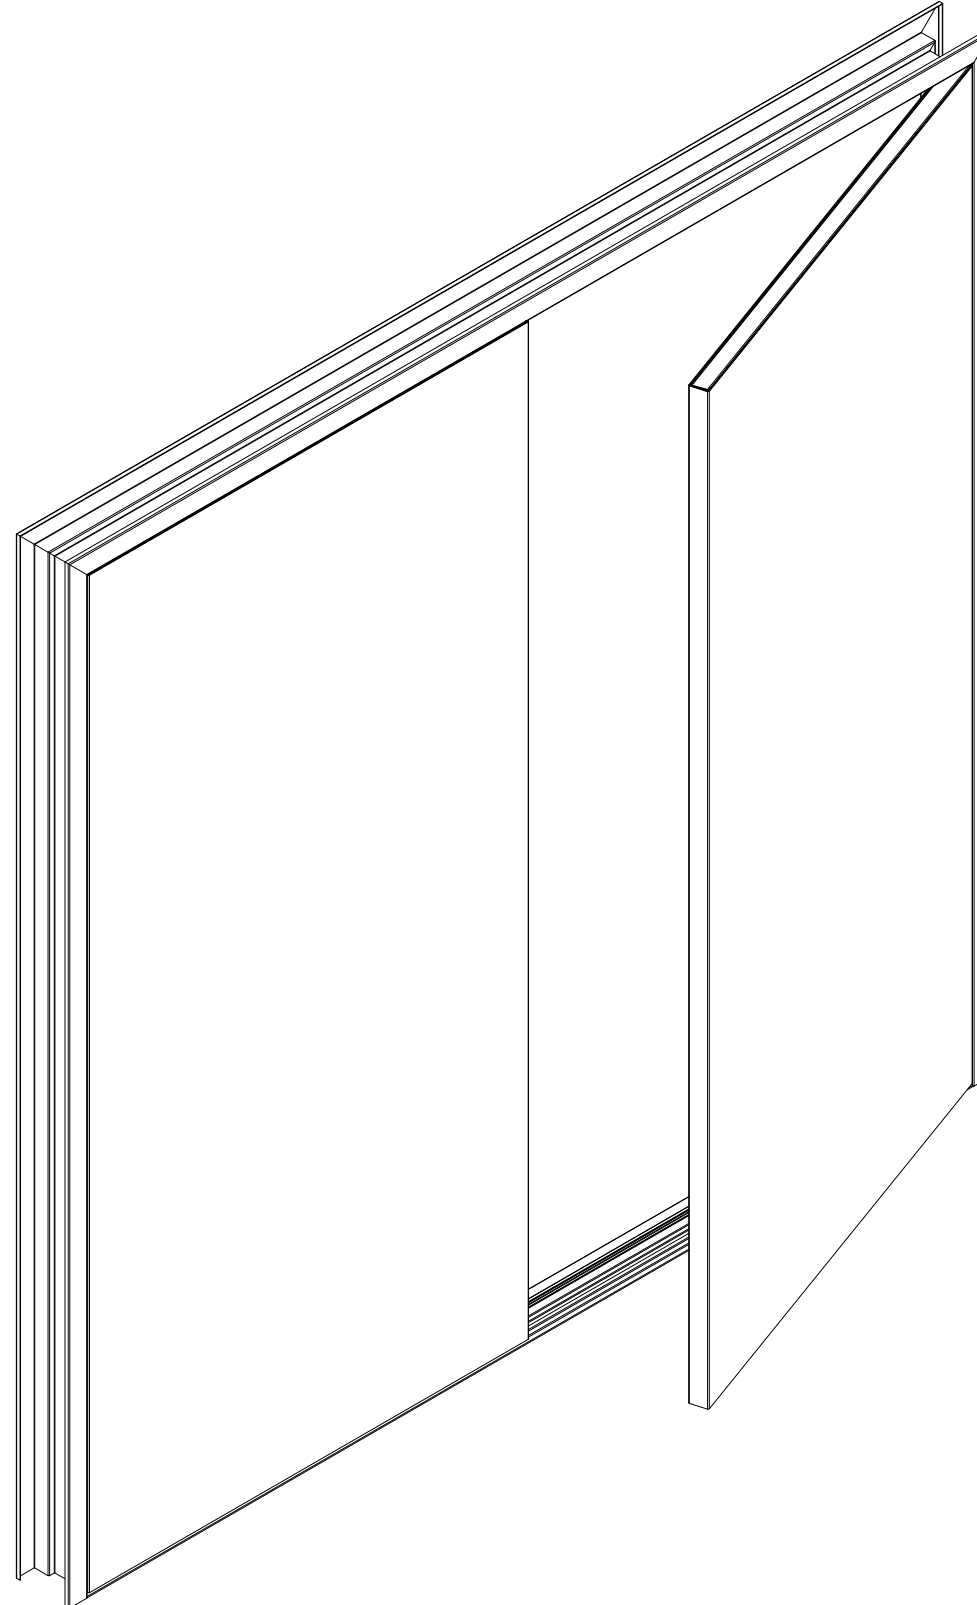

### SHEET INDEX

SHEET #	DESCRIPTION
1	COVER SHEET
2	ASSEMBLY OPTIONS
3	DOOR FRAME OPTIONS
4	DOOR FRAME ANCHORING INFORMATION
5	WATER INFILTRATION DOOR FRAME WEATHER STRIPPING INFORMATION
6	MANUFACTURERS' NOTES

**CURRIES**

**ASSA ABLOY**

Experience a safer  
and more open world

**Curries**  
Division of ASSA ABLOY Door Group, Inc.  
1502 12th NE  
Mason City, Iowa 50401

COMMERCIAL STEEL EXTERIOR DOOR ASSEMBLIES  
FLUSH PAIRS OF DOORS  
Current Adopted Edition of FBC  
FLORIDA PRODUCT APPROVAL 32087.1

REV	DESCRIPTION	DRWN	CHKD	DATE
1	ORIGINAL ISSUE	Rattay	Rattay	03/20/20

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRIES, DIVISION OF ASSA ABLOY DOOR GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRIES IS PROHIBITED.

SCALE: NTS UNLESS NOTED  
DWG #: RD1231  
SHEET: 1 OF 6



# CURRIES FLUSH PAIRS OF DOORS


PRODUCTS ILLUSTRATED IN THIS DOCUMENT ARE QUALIFIED FOR LARGE AND SMALL MISSILE IMPACT. LARGE MISSILE IMPACT IS 9 LB 2 X 4 AT 80 FEET PER SECOND OR 895 FT-LBS. (MISSILE LEVEL E)  
 PRODUCT MEETS REQUIREMENTS OF THE HIGH VELOCITY HURRICANE ZONE.



Experience a safer  
and more open world


**Curries**  
 Division of ASSA ABLOY Door Group, Inc.  
 1502 12th NE  
 Mason City, Iowa 50401

COMMERCIAL STEEL EXTERIOR DOOR ASSEMBLIES  
 FLUSH PAIRS OF DOORS  
 Current Adopted Edition of FBC  
 FLORIDA PRODUCT APPROVAL 32087.1

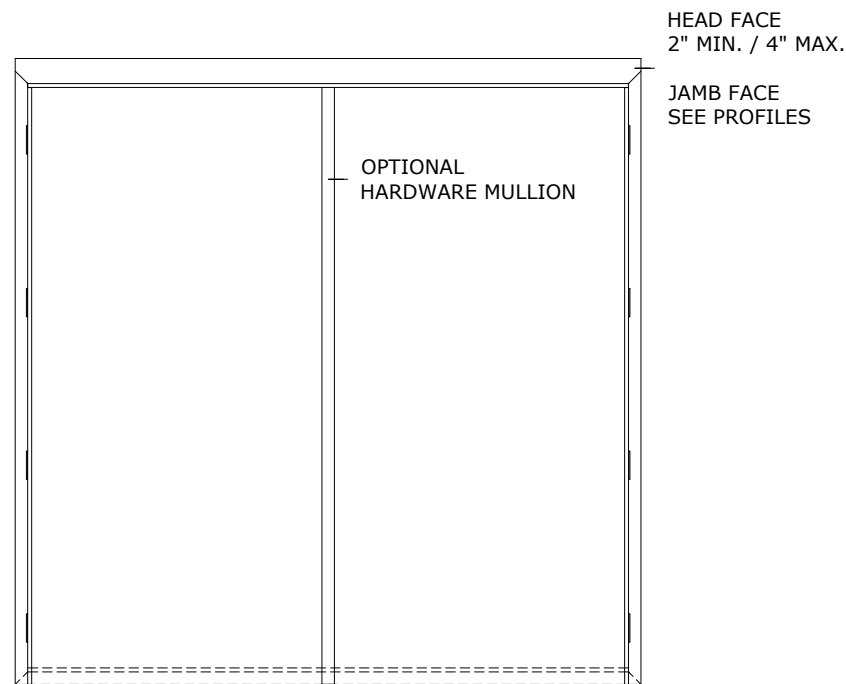


8080 ± 150 PSF MAX. DESIGN PRESSURE  
 4" MIN. / 14" MAX. DEPTH  
 KD CORNER 16 GA. MIN. / 14 GA. MAX.  
 WELDED CORNER 16 GA. MIN. / 12 GA. MAX.  
 FOUR SIDED DOOR FRAME WITH WELDED CORNERS ALSO PERMITTED

## FRAME PROFILES

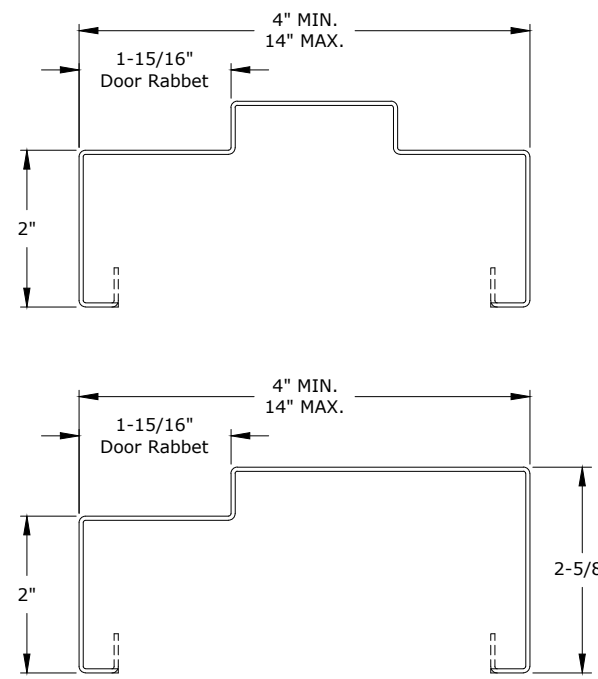


CONVENTIONAL PROFILE

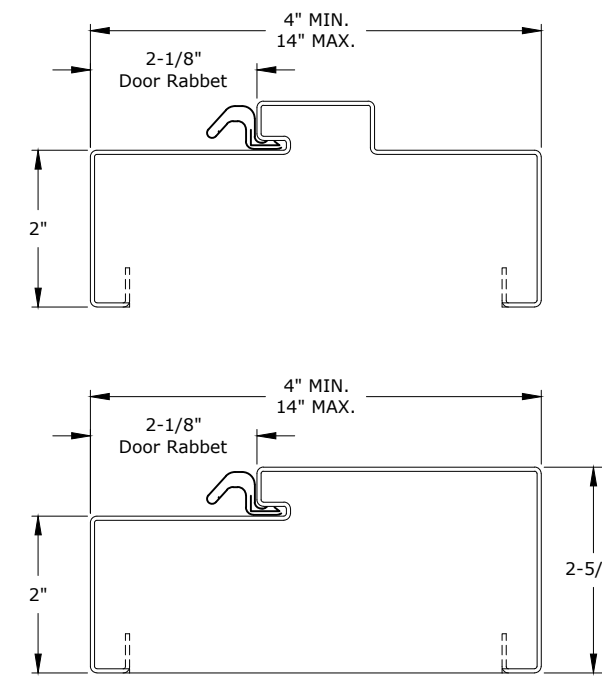

KERF PROFILE

## FRAME CONSTRUCTION OPTIONS

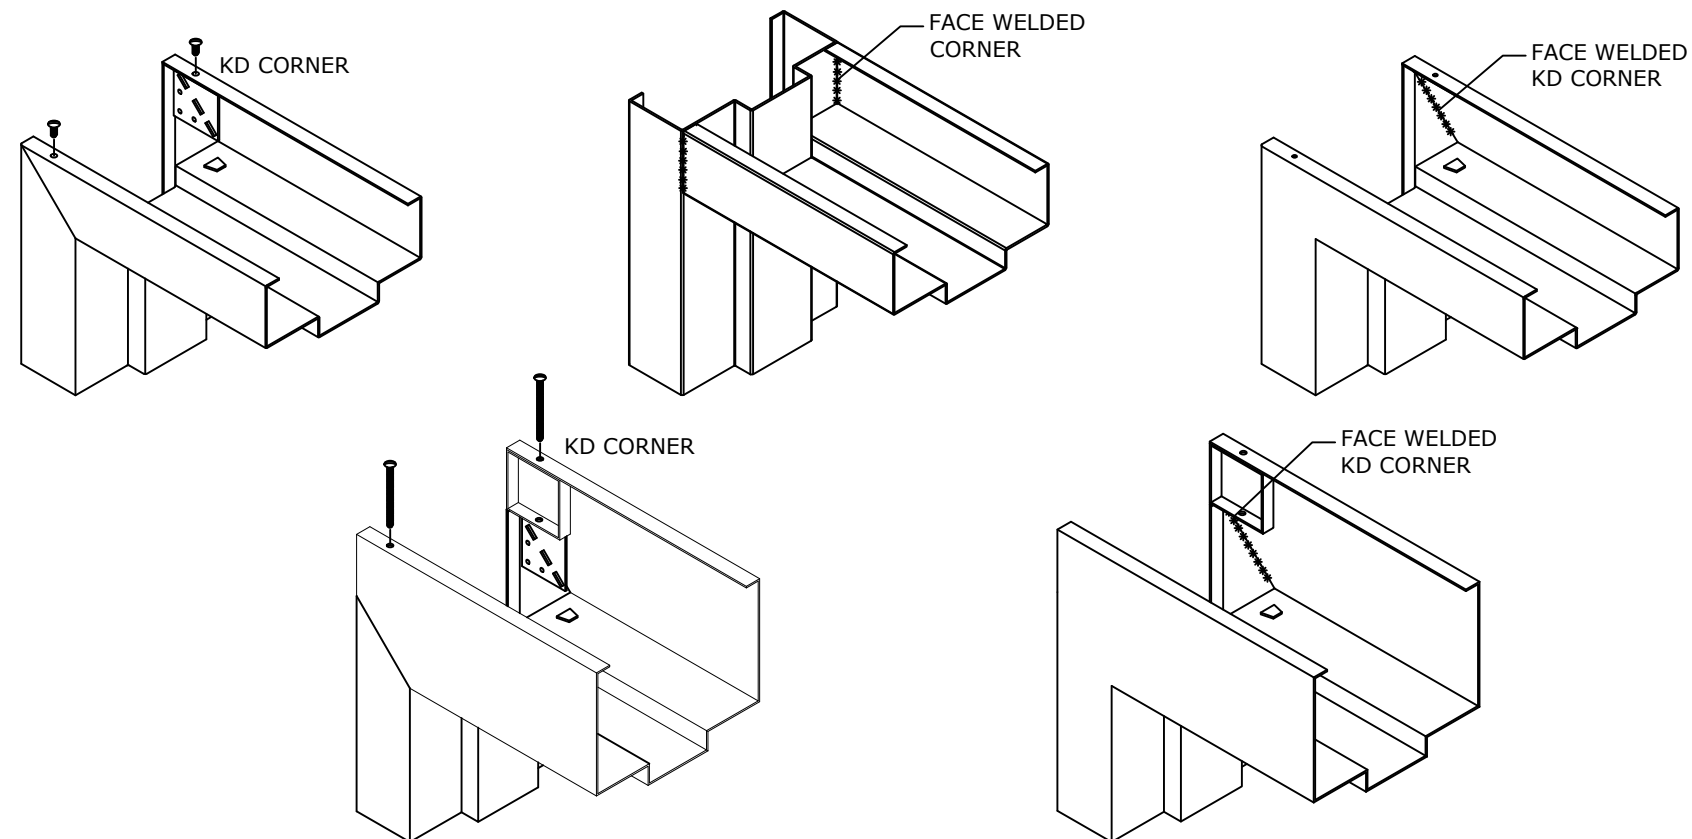

REV	DESCRIPTION	DRWN	CHKD	DATE
-	ORIGINAL ISSUE	Rattay	Rattay	03/20/20
-		-	-	-
-		-	-	-
-		-	-	-
-		-	-	-
-		-	-	-
-		-	-	-
-		-	-	-
-		-	-	-
-		-	-	-

SCALE: NTS UNLESS NOTED  
 DWG #: RD1231  
 SHEET: 3 OF 6

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRIES, DIVISION OF ASSA ABLOY DOOR GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRIES IS PROHIBITED.







