


ELEVATION SL70 SYSTEM, INSTALLATION

GENERAL NOTES

- 1 FASTENER INSTALLATIONS SHOWN ON THIS SHEET ARE CAPABLE OF WITHSTANDING THE DESIGN WIND PRESSURES SHOWN ON THE CURVES IN THE FLORIDA EVALUATION REPORT WITH APPROPRIATE FACTORS OF SAFETY.
- 2 IF THE ROUGH OPENING IS GREATER THAN 3/8", SOLID WOOD BLOCKING MUST BE PROVIDED.
- 3 INWARD OPENING DETAILS ARE SHOWN ON THIS DRAWING. OUTWARD OPENING PANELS REQUIRE THE SAME INSTALLATION FASTENERS AT THE SAME SPACING.
- 4 INSTALLATION FASTENERS SHOWN IN RAISED SILL DETAIL ON THIS DRAWING ALSO APPLY TO ALL RECESSED TYPE SILLS.
- 5 ALL INSTALLATION FASTENERS MUST HAVE WASHER UNDER THE HEAD THAT BEARS ON ALUMINUM.

TEST RESULTS

- UNITS 4 PANELS WIDE, EACH PANEL 3'-3" WIDE BY 9'-9" HIGH
- IN SWING WITH RAISED SILL, D.P.= +45.1/-70.2 PSF, DEFLECTION 1.97"
- OUT SWING WITH RAISED SILL, D.P.= +70.2/-45.1 PSF DEFLECTION 1.97"
- IN SWING WITH SADDLE SILL, D.P.= +45.1/-55.1 PSF DEFLECTION 1.22"

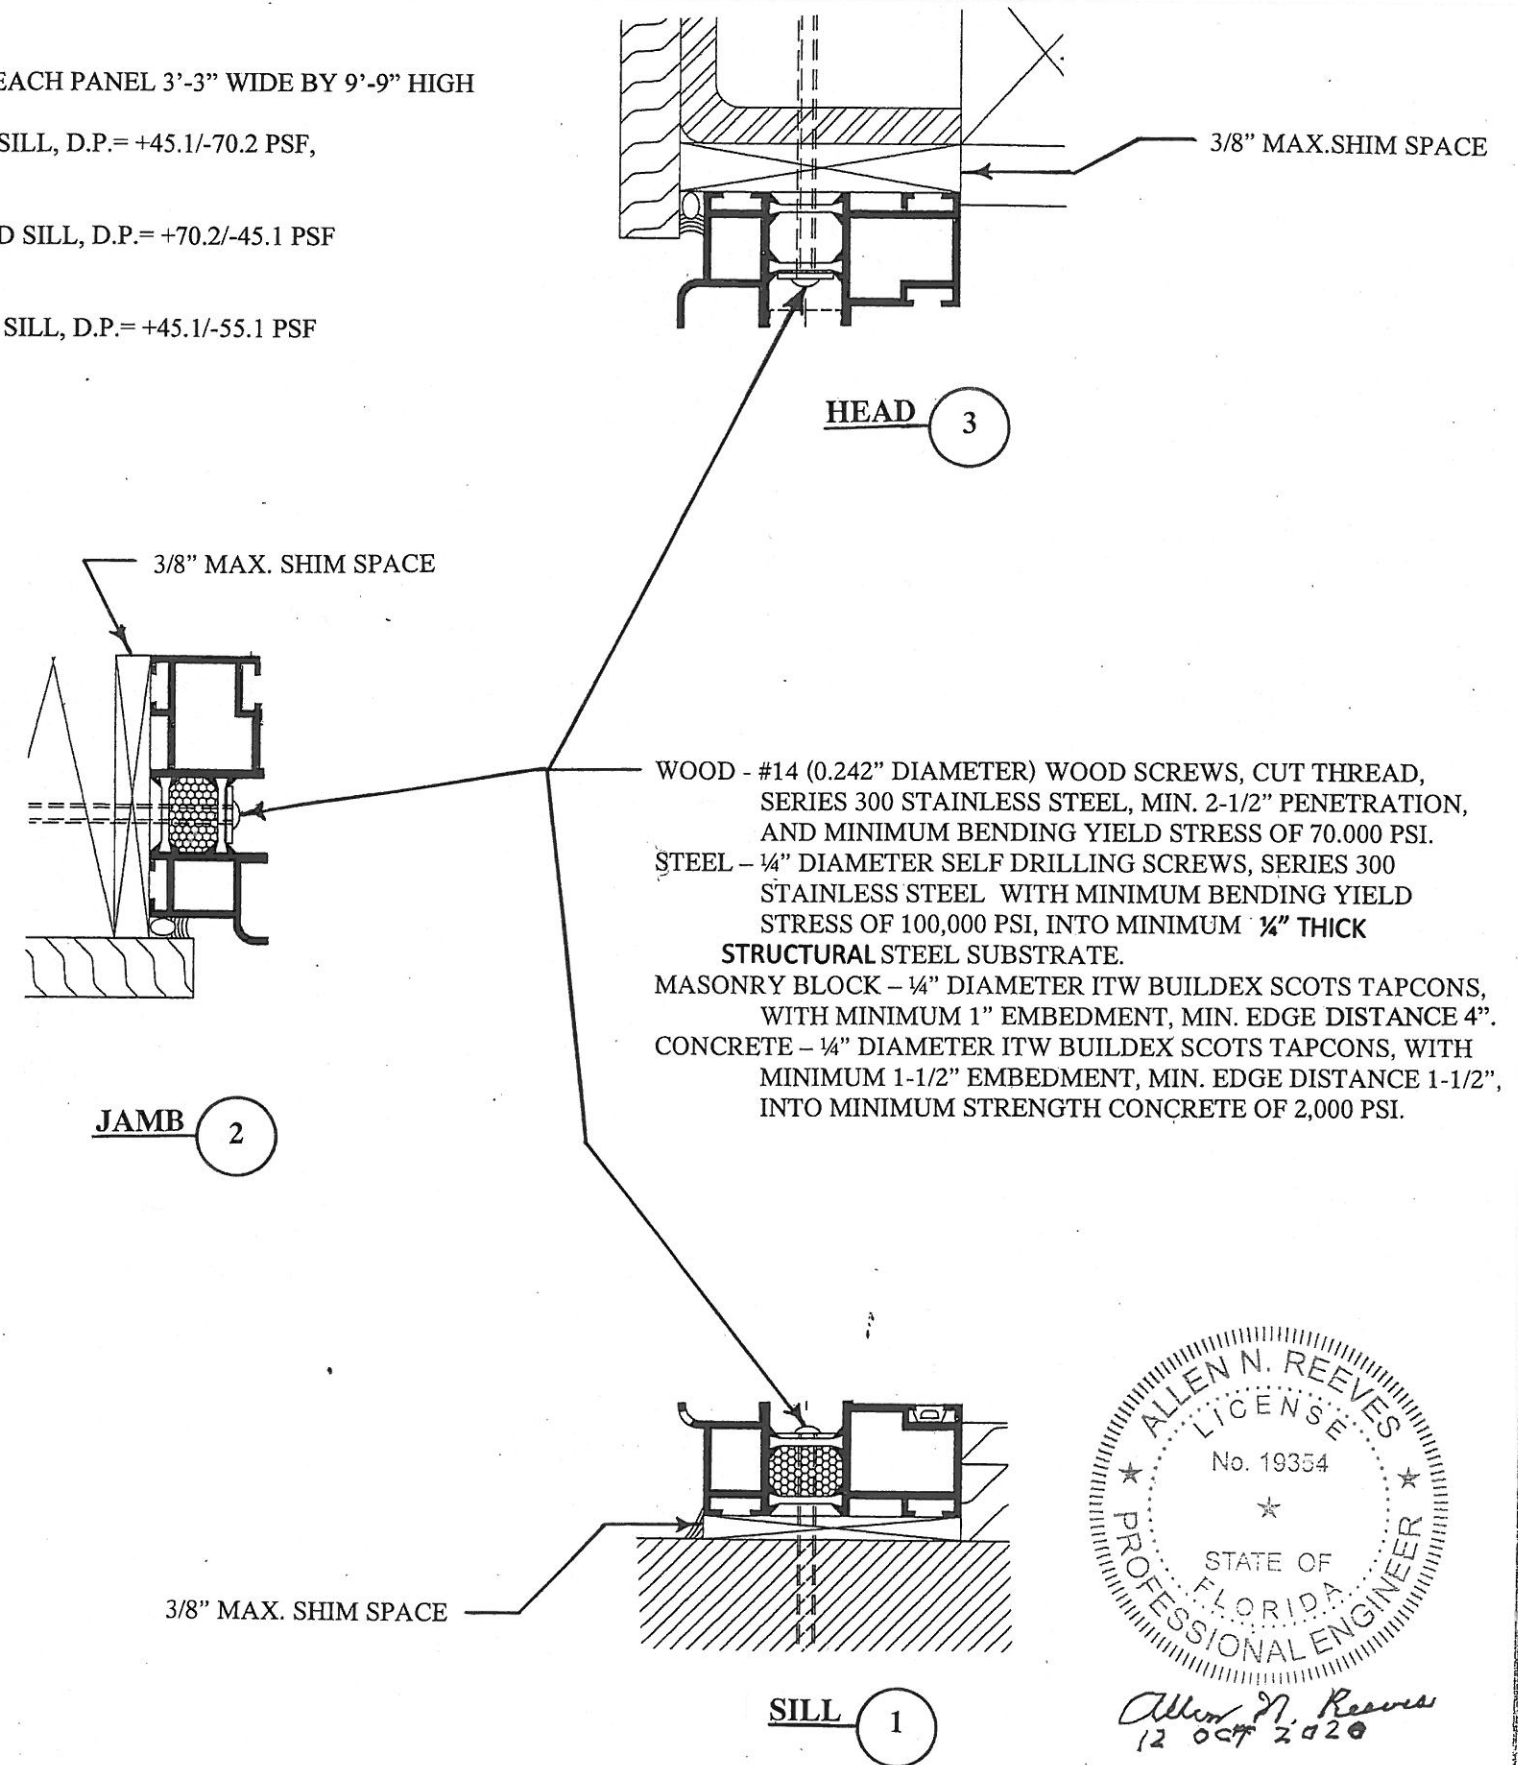

Allen N. Reeves
12 OCT 2020

Allen N. Reeves, P.E. Structural Engineer Florida License #19354	
HR Engineering, Inc.	REV. 6 OCT. 2020
CLIENT: NANA WALL SYST.	DATE: 21 MAY 2010
BY: A. REEVES	PROJECT NO. 20090001
	PROJECT NAME: SL70 SYSTEM
	10040009-2 SHEET 1 OF 1