	REVISIONS		
REV	DESCRIPTION	DATE	APPROVED

NOTES:

- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING THE HVHZ.
- 2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
- 4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
- 5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- 6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
- 7. SHIM AS NEEDED. AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
- 8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
- 9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
- 10. FRAME MATERIAL: ALUMINUM 6063-T5.
- 11. UNITS MUST BE GLAZED PER ASTM E1300, WITH SAFETY GLAZING.
- 12. APPROVED IMPACT PROTECTIVE SYSTEM <u>IS REQUIRED</u> FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.


- 13. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 14. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 15. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 16. ALL FASTENERS TO BE CORROSION RESISTANT.
- 17. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: GROUT/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI 1/8" THICK MINIMUM


SIGNED: 12/19/2022

		E6 GLOBAL IPA, LLC. 12-1394, 369 gangnam-daero, seocho-gu seoul 06621, south korea						
		AZ57-HWF2 TWIN CORE ALUMINUM BIFOLD DOOR				1111		
TABLE OF CONTENTS			NON-IMPAC NOTES	I			=	
SHEET NC	. DESCRIPTION	DRAWN:		DWG NO.			REV	=
1	NOTES	R.L.		08-03852			_	
2	ELEVATION AND GLAZING DETAILS	SCALE NTS	DATE 1	1/18/2022	SHEET 1	OF 7		
3 - 6	INSTALLATION DETAILS	L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com						
7	COMPONENTS							

No. 62514 *
No. 62514 *
No. 62514 *
STATE OF WILLIAM STAT

Luis R. Lomas P.E. FL No.: 62514

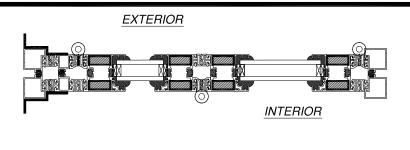

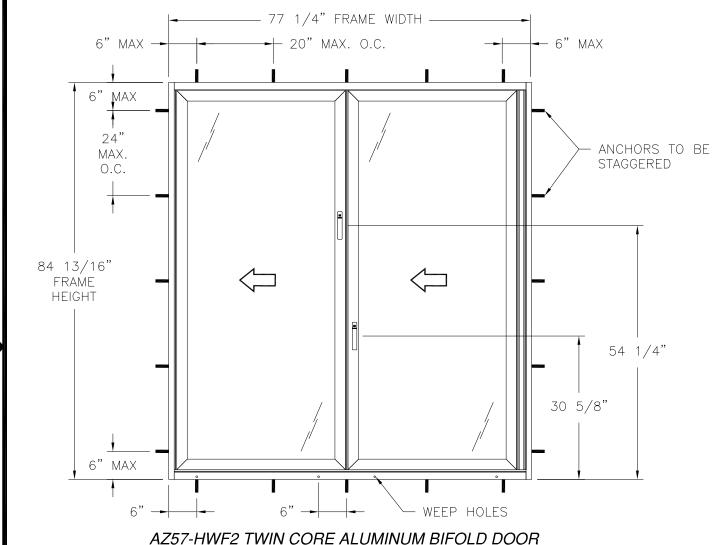

DESIGN PRESSURE RATING	IMPACT RATING		
±70.0PSF	NONE		

INTERIOR VIEW

	HARDWARE SCHEDULE				
A.	HINGE WITH ROLLER, 4" FROM EACH END OF THE STILES ON PANELS				
B.	MULTI-POINT LOCK SHOOT BOLTS AT HEAD AND SILL OF EACH PANEL AND AT HANDLE LOCATION				
C.	ALUMINUM CLIP RUNNING FULL LENGTH OF JAMB				
D.	L-BRACKET (ALUMINUM 6063-T5) AT FRAME JAMB				
E.	HANDLE (ZINC) AT PANEL STILE				
F.	ALUMINUM 6063-T5 PANEL REINFORCEMENT (TWIN CORE) AT TOP, BOTTOM RAIL AND STILES				
G.	(2) ALUMINUM REINFORCEMENT BAR ON EACH RAIL AND STILE				

REVISIONS


REV DESCRIPTION DATE APPROVED

NOTES:


- 1. PANEL SIZE: 36" X 80"
- 2. D.L.O. SIZE: 32 3/8" X 76 3/8""

SIGNED: 12/19/2022

E6 GLOBAL IPA, LLC. 12-1394, 369 GANGNAM-DAERO, SEOCHO-GU SEOUL 06621, SOUTH KOREA AZ57-HWF2 TWIN CORE ALUMINUM BIFOLD DOOR NON-IMPACT ELEVATION DRAWN: DWG NO. R.L. 08-03852 SCALE NTS DATE 11/18/2022 SHEET 2 OF 7 L. ROBERTO LOMAS P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com




Luis R. Lomas P.E. FL No.: 62514

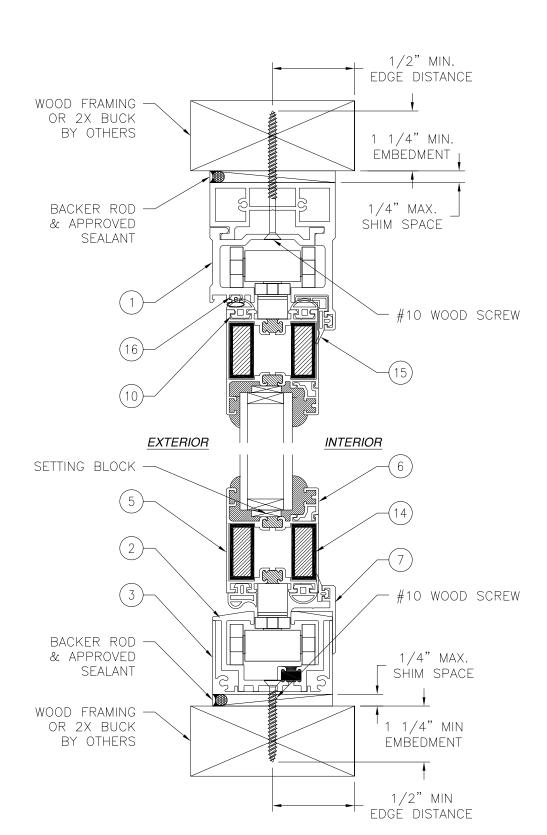

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

REVISIONS


REV DESCRIPTION DATE APPROVED

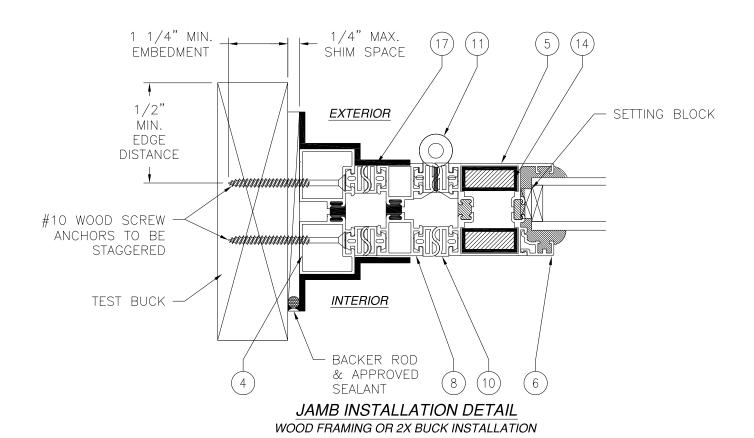

NOTES:


- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 12/19/2022

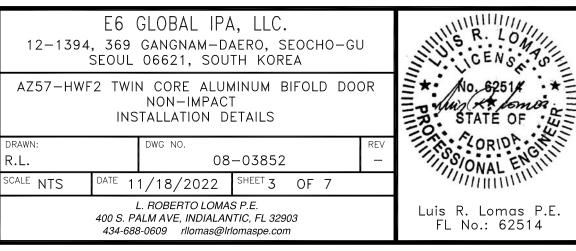

REVISIONS


REV DESCRIPTION DATE APPROVED

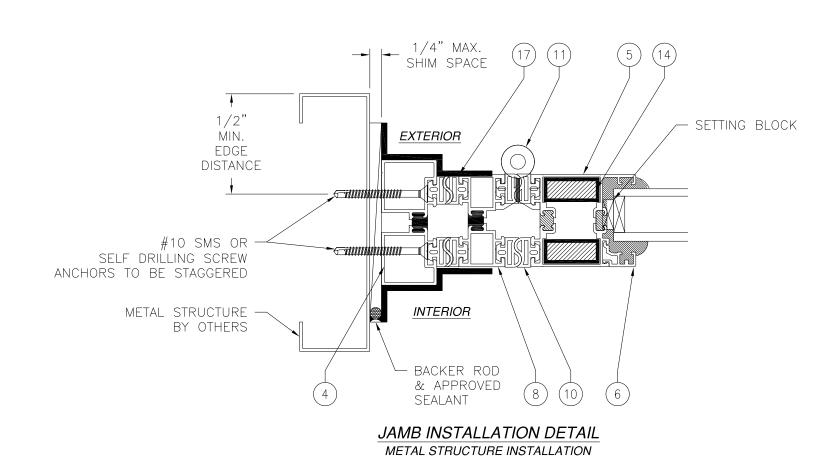

NOTES:


- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 12/19/2022 E6 GLOBAL IPA, LLC. 12-1394, 369 GANGNAM-DAERO, SEOCHO-GU SEOUL 06621, SOUTH KOREA TREV STATE CORIDA GIANTING OMAL ENGLISHMENT OF THE PROPERTY OF AZ57-HWF2 TWIN CORE ALUMINUM BIFOLD DOOR NON-IMPACT INSTALLATION DETAILS DRAWN: DWG NO. R.L. 08-03852 SCALE NTS DATE 11/18/2022 SHEET 4 OF 7 L. ROBERTO LOMAS P.E. Luis R. Lomas P.E. 400 S. PALM AVE, INDIALANTIC, FL 32903 FL No.: 62514 434-688-0609 rllomas@lrlomaspe.com

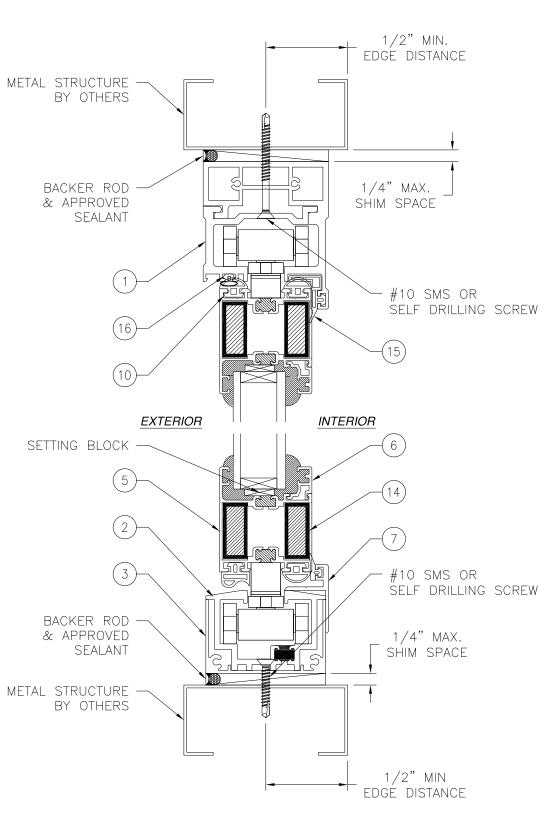

VERTICAL CROSS SECTION


METAL STRUCTURE INSTALLATION

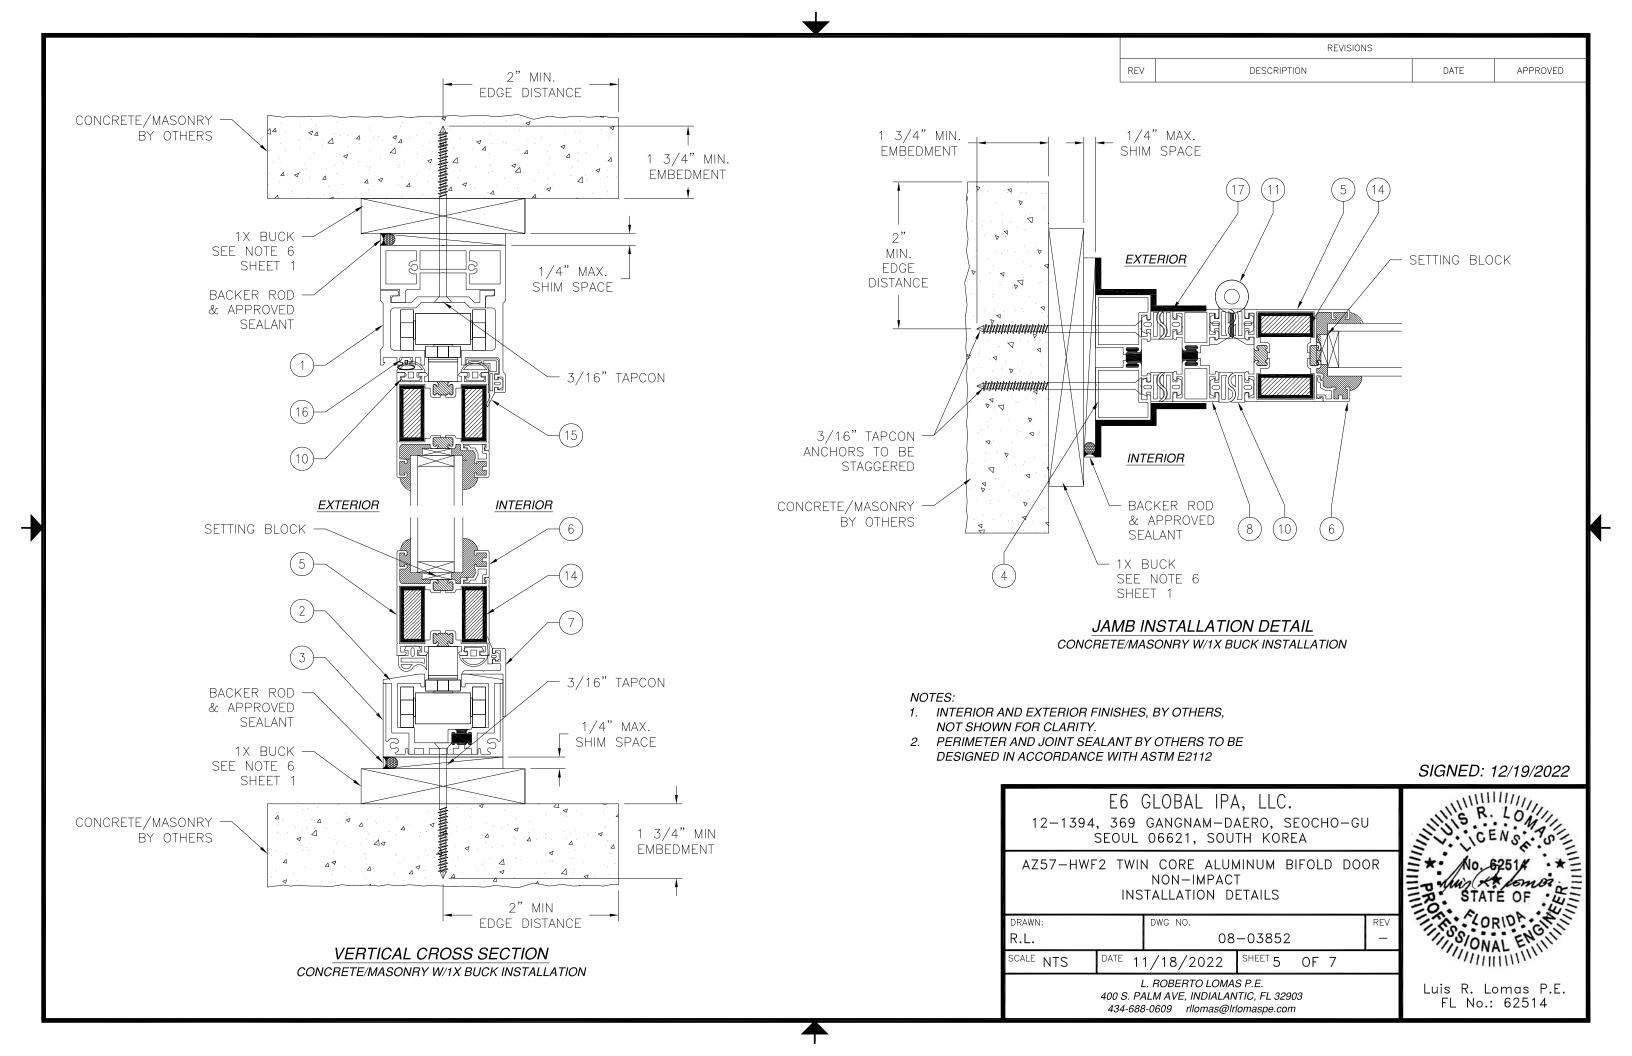

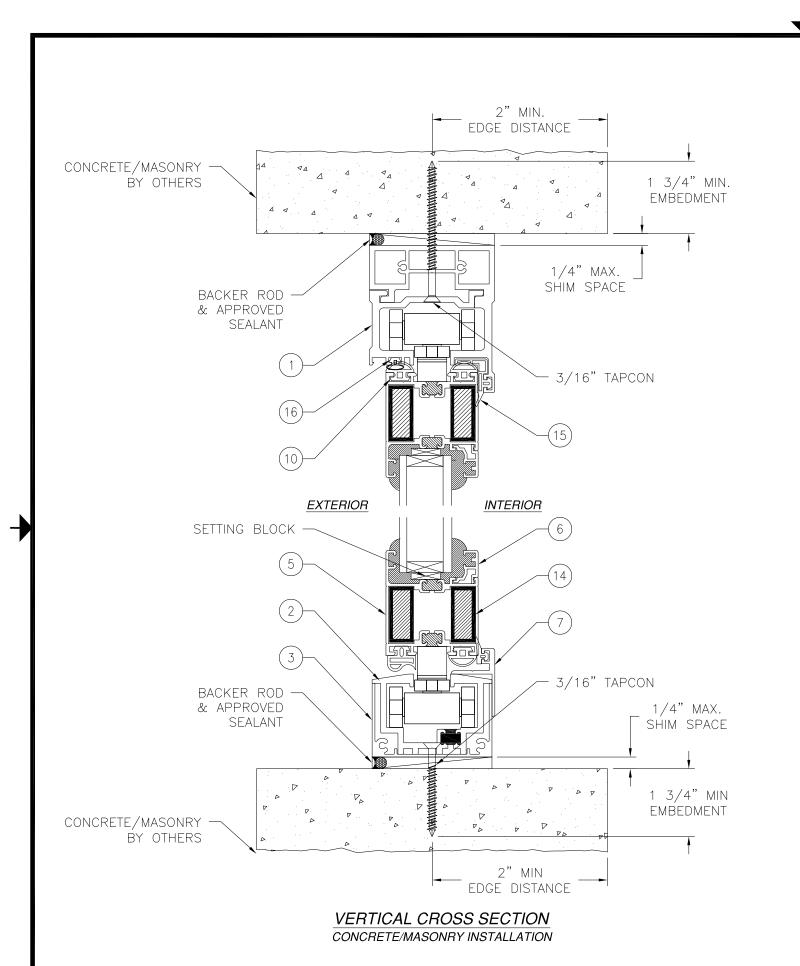

REVISIONS

REV DESCRIPTION DATE APPROVED

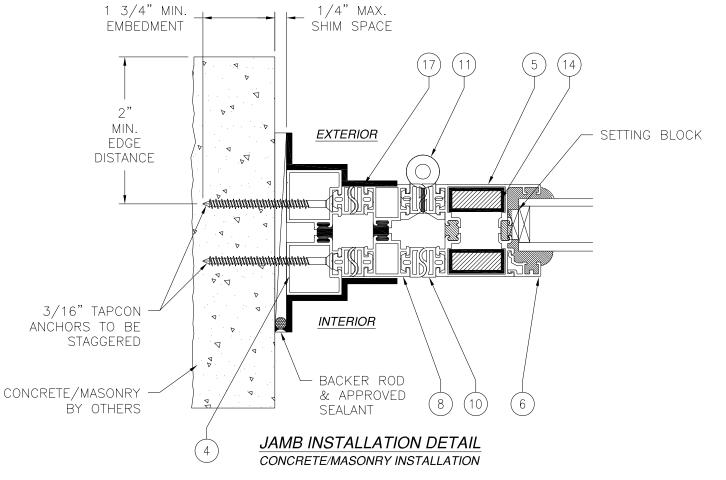

NOTES:

- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 12/19/2022

