DRUTEX S.A.

MB-86N SI FIXED WINDOW (HVHZ)(IMPACT)

GENERAL NOTES:

- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), INCLUDING HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - AAMA/WDMA/CSA 101/I.S.2/A440-17
 - TAS 201-94
 - TAS 202-94
 - TAS 203-94
 - ASTM E1886-19
 - ASTM E1996-20
- ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING, AND METAL FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 4. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/4 INCH OF THE DEPICTED LOCATION IN THE ANCHOR LAYOUT DETAIL (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- 5. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
- 6. APPROVED IMPACT PROTECTIVE SYSTEM **IS NOT REQUIRED**ON THIS PRODUCT IN AREAS REQUIRING IMPACT
 RESISTANCE.
- 7. WINDOW FRAME MATERIAL: ALUMINUM 6063-T5
- 8. GLASS MEETS THE REQUIREMENTS OF ASTM E1300 GLASS CHARTS. SEE SHEET 1 FOR GLAZING DETAIL.
- CUSTOM SIZES AVAILABLE UPON REQUEST. CUSTOM DESIGN PRESSURE WILL BE ASSIGNED EQUAL TO NEXT LARGER STANDARD SIZE.


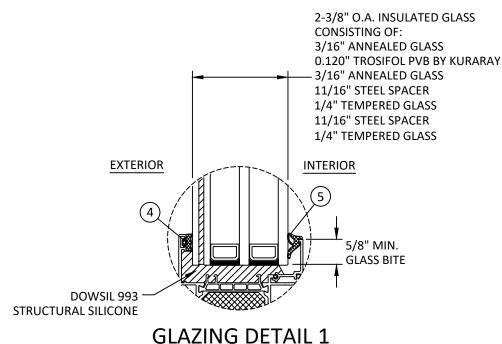


TABLE OF CONTENTS			
SHEET	SHEET DESCRIPTION		
1	GENERAL NOTES AND GLAZING DETAIL		
2	ELEVATION AND DESIGN PRESSURE TABLE		
3	ANCHOR LAYOUT		
4	VERTICAL SECTION		
5	HORIZONTAL SECTION		
6	ANCHOR DETAILS AND INSTALLATION NOTES		
7	BILL OF MATERIALS & COMPONENTS		

DESIGN PRESSURE RATING (PSF)				
CONFIGURATION	WIDTH (IN.)	HEIGHT (IN.)	DESIGN PRESSURE	MISSILE IMPACT RATING
О	SEE TABLE ON SHEET 2		LARGE & SMALL MISSILE IMPACT	



- 1. GLASS TYPE COMPLIES WITH ASTM E1300 REQUIREMENTS. PER THE FBC TEMPER AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
- 2. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
- 3. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
- 4. D.L.O. AND DESIGN PRESSURES MAY NOT EXCEED MAX VALUES SHOWN HEREIN

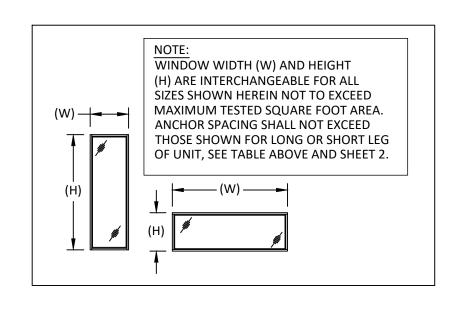



LEBORSKA 31, 77-100 BYTOW, POLAND PH: +48-59-822-9101 FX: +48-59-822-9103


WB-80N ST ED WINDOW HZ) (IMPACT) NERAL NOTES & LAZING DETAIL

D BY:
BUILDING DROPS,
1900 NE MIAMI COURT, STE.

REPARED BY:

REMARKS BY DATE

ITHE INSTALLATION DETAILS DESKRIBED HEREIN ARE GENER.
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFI
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIAT
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL46727

DATE: 03.19.24

DWG. BY: CHK. BY:

FB SCALE: NTS


DWG. #: DRU046

SHEET:

1

OF 7

HFN

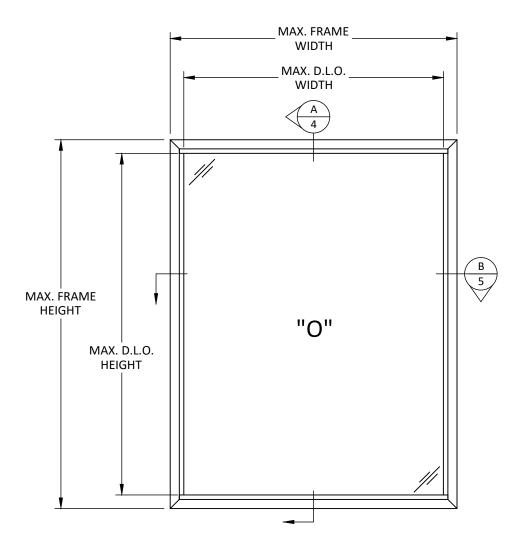

ELEVATION

D.L.O. HEIGHT = FRAME HEIGHT - 5.25" D.L.O. WIDTH = FRAME WIDTH - 5.25"

NOMIN			
FRAME WIDTH (IN.)	FRAME HEIGHT (IN.)	POS. (+)	NEG. (-)
22	40	70.0	70.0
28		70.0	70.0
34		70.0	70.0
40		70.0	70.0
22		70.0	70.0
28		70.0	70.0
34	46	70.0	70.0
40		70.0	70.0
46		70.0	70.0
22		70.0	70.0
28	8	70.0	70.0
34 40 52	70.0	70.0	
	70.0	70.0	
46		70.0	70.0
52		70.0	70.0
22		70.0	70.0
28]	70.0	70.0
34]	70.0	70.0
40	58	70.0	70.0
46]	70.0	70.0
52]	70.0	70.0
58]	66.5	66.5
22		70.0	70.0
28		70.0	70.0
34		70.0	70.0
40	64	70.0	70.0
46	64	70.0	70.0
52		70.0	70.0
58		66.5	66.5
64		60.3	60.3
22	22 28 34	70.0	70.0
28		70.0	70.0
34		70.0	70.0
40	70.875	70.0	70.0
46]	70.0	70.0
52]	70.0	70.0
55.125]	70.0	70.0

NOMINA	DOC	NEC	
FRAME WIDTH (IN.)	FRAME HEIGHT (IN.)	POS. (+)	NEG. (-)
22		70.0	70.0
28	76	70.0	70.0
34		70.0	70.0
40		70.0	70.0
46	1	70.0	70.0
22		70.0	70.0
28		70.0	70.0
34	82	70.0	70.0
40		70.0	70.0
46		70.0	70.0
22	88	70.0	70.0
28		70.0	70.0
34		70.0	70.0
40		70.0	70.0
22		70.0	70.0
28	04	70.0	70.0
34	94	70.0	70.0
40		70.0	70.0
22		70.0	70.0
28	100	70.0	70.0
34		70.0	70.0
22		70.0	70.0
28	106	70.0	70.0
34		70.0	70.0
22		70.0	70.0
28	112	70.0	70.0
34		70.0	70.0
22	110	70.0	70.0
28	- 118	70.0	70.0
22	124	70.0	70.0
28	124	70.0	70.0



LEBORSKA 31, 77-100 BYTOW, POLAND PH: +48-59-822-9101 FX: +48-59-822-9103


ELEVATION & DESIGN PRESSURE TABLE

PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478

REMARKS BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIG AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

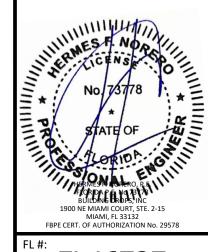

FL46727


03.19.24 DATE:

DWG. BY: CHK. BY:

NTS SCALE: **DRU046** DWG. #:

SHEET:

NOTE: TWO (2) INSTALLATION ANCHORS PER STRAP LOCATION.

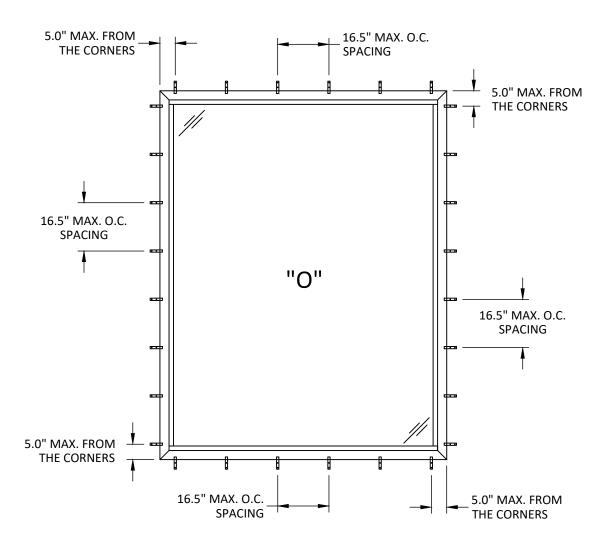

ANCHOR LAYOUT STRAP INSTALLATION



LEBORSKA 31, 77-100 BYTOW, POLAND PH: +48-59-822-9101 FX: +48-59-822-9103

ANCHOR LAYOUT

REMARKS

BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL #: FL46727


03.19.24 DATE:

DWG. BY: CHK. BY:

NTS SCALE: DRU046 DWG. #:

SHEET:

EXTERIOR INTERIOR

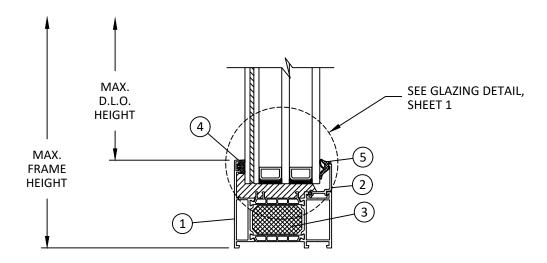





LEBORSKA 31, 77-100 BYTOW, POLAND PH: +48-59-822-9101 FX: +48-59-822-9103

VERTICAL SECTION

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132

REMARKS BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIG AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL46727


03.19.24 DATE:

DWG. BY:


CHK. BY: NTS SCALE:

DRU046 DWG. #:

SHEET:

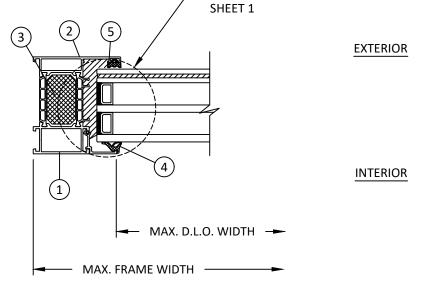

- SEE GLAZING DETAIL,

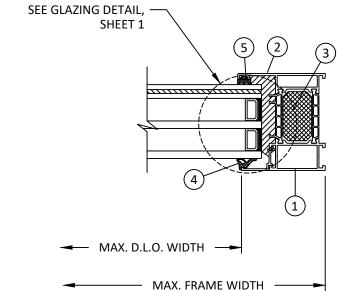

B HORIZONTAL SECTION
5



LEBORSKA 31, 77-100 BYTOW, POLAND PH: +48-59-822-9101 FX: +48-59-822-9103

HORIZONTAL SECTION


REMARKS

PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI, EL 33132
MIAMI, EL 33132
nut. (954)3399-8478

BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERI AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATI FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL46727


03.19.24 DATE: CHK. BY:


DWG. BY:

NTS SCALE: **DRU046** DWG. #:

SHEET:



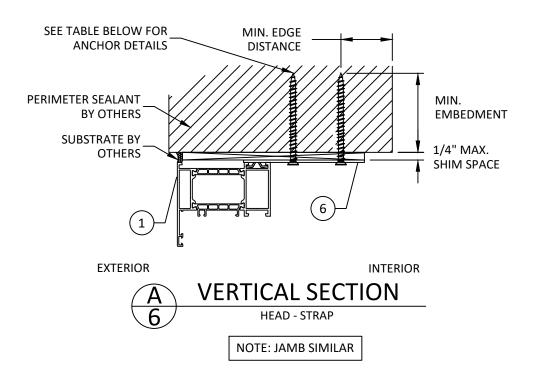

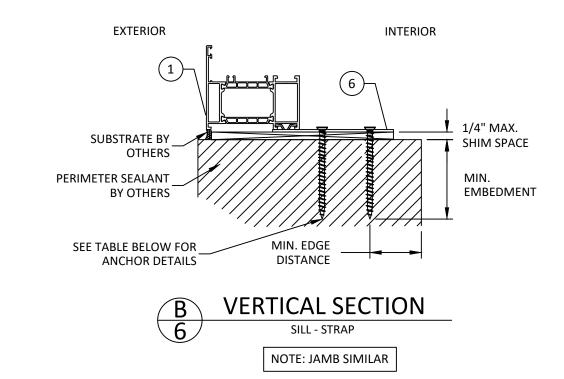

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS OTHERWISE STATED ON SHEET 3.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE
- 3. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR MASONRY OR CONCRETE OPENINGS, A 1X WOOD BUCK MAY BE USED (OPTIONAL) AS LONG AS THE MINIMUM EMBEDMENT AND EDGE DISTANCE REQUIREMENTS ARE STILL MET WITHIN THE CORRESPONDING HOST SUBSTRATE. SEE GENERAL NOTE #3 ON SHEET 1 FOR MORE INFORMATION.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR TYPE	MIN. EMBEDMENT	MIN. EDGE DISTANCE
	WOOD: MIN. SG = 0.55	#8 WOOD SCREW	1.50"	0.75"
STRAP	METAL: 18 GAUGE STEEL, MIN. Fy = 33KSI ALUMINUM: 1/8" MIN., 6063-T5	#8 SELF-DRILLING SCREW	3 THREADS MIN. PENETRATION BEYOND STRUCTURE	0.50"
	CONCRETE: f'c=3000PSI	3/16" ITW TAPCON	1.25"	2.00"
	MASONRY: CMU per ASTM C90 MIN. 2000 PSI	3/16" ITW TAPCON	1.00"	2.00"



LEBORSKA 31, 77-100 BYTOW, POLAND PH: +48-59-822-9101 FX: +48-59-822-9103

ANCHOR DETAILS & INSTALLATION NOTES MB-86N SI FIXED WINDOW (HVHZ) (IMPACT)

REMARKS

UILDING DROPS,

BY DATE

HE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENER ND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIF: ITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIA FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

FIOR DAPE NO 18178 BUILDING DROPS, INC 1900 NE MIAMI COURT, STE. 2-15 MIAMI, FL 33132 FBPE CERT. OF AUTHORIZATION No. 29578

FL #: FL46727


03.19.24 DATE: CHK. BY: HFN

DWG. BY:

NTS SCALE: **DRU046** DWG. #:


SHEET:

b












LEBORSKA 31, 77-100 BYTOW, POLAND PH: +48-59-822-9101 FX: +48-59-822-9103

MB-86N SI FIXED WINDOW (HVHZ) (IMPACT) BILL OF MATERIALS & COMPONENTS

BY DATE

FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL #: FL46727

03.19.24 DATE:

DWG. BY:

CHK. BY: NTS

DRU046 DWG. #:

SHEET:

SCALE:

BILL OF MATERIALS				
PART NO.	DESCRIPTION	MATERIAL		
K528612	FRAME	6063-T5		
K431629	GLAZING BEAD	6063-T5		
-	THERMAL MATERIAL	POLYETHYLENE		
120518	GASKET	EPDM		
120541	GASKET	EPDM		
80311040	STRAP	STEEL		
	K528612 K431629 - 120518 120541	PART NO. DESCRIPTION K528612 FRAME K431629 GLAZING BEAD - THERMAL MATERIAL 120518 GASKET 120541 GASKET		

