

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

Boral Roofing LLC. 7575 Irvine Center Drive, Suite 100 Irvine, CA. 92618

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Capri Concrete Roof Tile

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This renews NOA# 12-0308.07 and consists of pages 1 through 6. The submitted documentation was reviewed by Alex Tigera.



ALANA

NOA No.: 12-0904.07 Expiration Date: 12/16/17 Approval Date: 12/06/12 Page 1 of 6

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599 www.miamidade.gov/pera

ROOFING ASSEMBLY APPROVAL

Category:	Roofing
Sub-Category:	Roofing Tiles
Material:	Concrete

1. SCOPE

This approves a system using Capri Concrete Roof Tile, as manufactured Boral Roofing LLC in Lake Wales, FL., and described this Notice of Acceptance. For locations where the pressure requirements, as determined by applicable Building Code does not exceed the design pressure values obtained by calculations in compliance with RAS 127 using the values listed in the installation section herein. The attachment calculations shall be done as a moment based system.

2. PRODUCT DESCRIPTION

<u>Manufactured by</u> <u>Applicant</u>	Dimensions	Test <u>Specifications</u>	Product <u>Description</u>
Capri Concrete Tile	l = 17" w = 12-3/8" $\frac{1}{2}$ " thick	TAS 112	Low profile, interlocking, high pressure extruded concrete roof tile equipped with one nail hole and double roll ribs. For direct deck or battened nail-on, mortar or adhesive set applications.
Trim Pieces	l = varies w = varies varying thickness	TAS 112	Accessory trim, concrete roof pieces for use at hips, rakes, ridges and valley terminations. Manufactured for each tile profile.

2.1 PRODUCT DESCRIPTION

1. Lake Wales, FL.

2.2 SUBMITTED EVIDENCE:

Test Agency	<u>Test Identifier</u>	Test Name/Report	Date
Redland Technologies	7161-03	Static Uplift Testing	Dec. 1991
	Appendix III	PA 102 & PA 102(A)	
Redland Technologies	7161-03	Wind Tunnel Testing	Dec. 1991
	Appendix II	PA 108 (Nail-On)	
Redland Technologies	P0402	Withdrawal Resistance Testing of	Sept. 1993
		screw vs. smooth shank nails	
The Center for Applied	94-060B	Static Uplift Testing	March, 1994
Engineering, Inc.		PA 101 (Adhesive Set)	
The Center for Applied	94-084	Static Uplift Testing	May 1994
Engineering, Inc.		PA 101 (Mortar Set)	
Redland Technologies	P0631-01	Wind Tunnel Testing	July 1994
		PA 108 (Mortar Set)	
Redland Technologies	Letter Dated Aug. 1, 1994	Wind Tunnel Testing	Aug. 1994
		PA 108 (Nail-On)	



NOA No.: 12-0904.07 Expiration Date: 12/16/17 Approval Date: 12/06/12 Page 2 of 6

2.2 SUBMITTED EVIDENCE:

Test Agency	<u>Test Identifier</u>	Test Identifier <u>Test Name/Report</u>	
The Center for Applied	Project No. 307025	Wind Driven Rain	Oct. 1994
Engineering, Inc.	Test #MDC-76□	PA 100	
The Center for Applied	25-7183-1	Static Uplift Testing	Feb. 1995
Engineering, Inc.		PA 102	
		(2 Quik-Drive Screws, Direct Deck)	
The Center for Applied	25-7183-2	Static Uplift Testing	Feb. 1995
Engineering, Inc.		PA 102	
The Center for Applied	25-7214-2	Static Uplift Testing	March, 1995
Engineering, Inc.	25-7214-6		
Celotex Corporation		· · ·	Sep. 1998
-		• •	-
e			
e			
Walker Engineering, Inc.	Evaluation Calculations		December 1996
		25-7848-6	
Walker Engineering, Inc.	Evaluation Calculations	<i>v</i> 1	October 2007
Walker Engineering, Inc.	Evaluation Calculations	•	-
Nutting Engineering	TAS-112	13343.1	June 2007
Engineering, Inc. The Center for Applied Engineering, Inc. Celotex Corporation Testing Services Walker Engineering, Inc. Walker Engineering, Inc. Walker Engineering, Inc. Walker Engineering, Inc. Walker Engineering, Inc. Walker Engineering, Inc. Walker Engineering, Inc.	25-7214-6 528454-2-1 520109-2 Calculations Evaluation Calculations Evaluation Calculations Evaluation Calculations Evaluation Calculations	PA 102 (2 Quik-Drive Screws, Battens) Static Uplift Testing PA 102 (1 Quik-Drive Screw, Direct Deck) (1 Quik-Drive Screw, Battens) Static Uplift Testing PA 101 Aerodynamic Multiplier 25-7183 25-7094 25-7496 25-7584 25-7804b-8 25-7804b-8 25-7804-4 & 5 25-7804-4 & 5 25-7848-6 Aerodynamic Multipliers Two Patty Adhesive Set System	Dec. 1998 August 2007 March 1995 February 1996 April 1996 December 1996 October 2007 April 1999

3. LIMITATIONS

- **3.1** Fire classification is not part of this acceptance.
- **3.2** For mortar or adhesive set tile applications, a static field uplift test shall be performed in accordance with TAS 106.
- **3.3** Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with TAS 112, appendix 'A'. Such testing shall be submitted to the Building Code Compliance Office for review.
- **3.4** Minimum underlayment shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- **3.5** 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- **3.6** This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with applicable building code.



4. INSTALLATION

- **4.1** Capri Concrete Roof Tile and its components shall be installed in strict compliance with Roofing Application Standard RAS 118, RAS 119, and RAS 120.
- 4.2 Data For Attachment Calculations

Table 1: Average Weight (W) and Dimensions (I x w)					
Tile Profile	Weight-W (lbf)	Length-I (ft)	Width-w (ft)		
Capri Concrete Tile	9.51	1.42	1.03		

Table 2: Aerodynamic Multipliers - λ (ft³)				
Tile Profile	λ (ft ³) Batten Application	λ (ft ³) Direct Deck Application		
Capri Concrete Tile	0.265	0.287		

Table 3: Restoring Moments due to Gravity - M _g (ft-lbf)												
Tile Profile	2":1	2"	3":1	2"	4":'	12"	5":'	12"	6":	12"	7":12 grea	
Capri	Battens	10 - California -	Battens	The second procession of the	Battens		Battens		Battens	Direct	Battens	Direct
Concrete		Deck		Deck		Deck		Deck		Deck		Deck
Tile	5.71	6.41	5.63	6.40	5.52	6.26	5.39	6.10	5.24	5.93	5.07	5.75

Table 4: Attachment Resistance Expressed as a Moment - M _f (ft-lbf) for Nail-On Systems						
Tile Profile	Fastener Type	Direct Deck (min 15/32" plywood)	Direct Deck (min. 19/32" plywood)	Battens		
Capri Concrete	2-10d Ring Shank Nails	27.8	37.4	28.8		
Tile	1-10d Smooth or Screw Shank Nail	8.8	11.8	4.1		
	2-10d Smooth or Screw Shank Nails	16.4	21.9	7.1		
	1 .#8 Screw	25.8	25.8	22.9		
	2 .#8 Screws	47.1	47.1	49.1		
	1-10d Smooth or Screw Shank Nail (Field Clip)	24.3	24.3	24.2		
	1-10d Smooth or Screw Shank Nail (Eave Clip)	19.0	19.0	22.1		
	2-10d Smooth or Screw Shank Nails (Field Clip)	35.5	35.5	34.8		
	2-10d Smooth or Screw Shank Nails (Eave Clip)	31.9	31.9	32.2		



Table 6: Attachment Resistance Expressed as a Moment M _f (ft-lbf) for Two Patty Adhesive Set Systems					
TileTile ApplicationMinimum AttachmentProfileResistance					
Capri Concrete Tile	Concrete Tile Adhesive ¹ 26.1 ²				
1 See manufactures component approval for installation requirements.					
2 Flexible Products Company TileBond Average weight per patty 11.4 grams.					
3M [™] 2-Component Foam Roof Tile	Adhesive AH-160 Average weight per patty 8 gi	rams.			

Table 7: Attachment Resistance Expressed as a Moment - M_f (ft-lbf) for Single Patty Adhesive Set Systems

Tile Profile	Tile Application	Minimum Attachment Resistance		
Capri Concrete Tile	3M [™] 2-Component Foam Roof Tile Adhesive AH-160	86.61 ³		
3M [™] 2-Component Foam Roof Tile Adhesive AH-160		45.5 ⁴		
3 Large paddy placement of 54grams of 3M [™] 2-Component Foam Roof Tile Adhesive AH-160.				
4 Medium paddy placement of	of 24grams of 3M [™] 2-Component Foam Roof Tile Adhesi	ve AH-160.		

Table 8: Attachment Resistance Expressed as a Moment - M _f (ft-lbf) for Mortar Set Systems					
Tile Profile	Tile Application	Attachment Resistance			
Capri Concrete Tile Mortar Set ⁵ 20.60					
5 Tile-Tite Roof Tile Mortar.					

5. LABELING

All tiles shall bear the imprint or identifiable marking of the manufacturer's name or logo (See Detail Below), or following statement: "Miami-Dade County Product Control Approved".



BORAL ROOFING LLC CAPRI TILE IDENTIFICATION MARK (LAKE WALES, FL.) (LOCATED ON UNDERSIDE OF TILE)




NOA No.: 12-0904.07 Expiration Date: 12/16/17 Approval Date: 12/06/12 Page 5 of 6

6. BUILDING PERMIT REQUIREMENTS

- 6.1 Application for building permit shall be accompanied by copies of the following:
- 6.1.1 This Notice of Acceptance.
 - **6.1.2** Any other documents required by the Building Official or applicable building code in order to properly evaluate the installation of this system.

PROFILE DRAWINGS

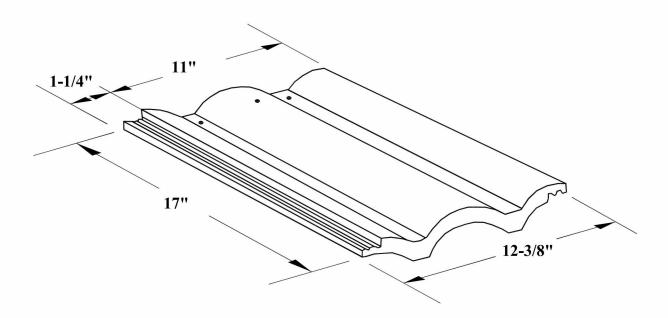

CAPRI CONCRETE TILE (POMPANO BEACH, FL.)

END OF THIS ACCEPTANCE



NOA No.: 12-0904.07 Expiration Date: 12/16/17 Approval Date: 12/06/12 Page 6 of 6