
Print Status: Approved

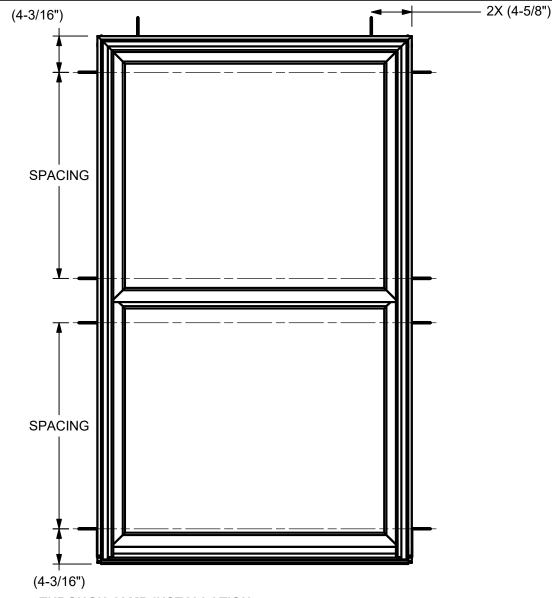

THROUGH JAMB INSTALLATION:

- SECURE THE JAMBS THROUGH ALL PRE-DRILLED HOLES WITH #8 X 3" PAN HEAD SCREWS
- MAXIMUM SPACING OF JAMBS NOT TO EXCEED 35-9/16"
- SECURE THE HEAD JAMB WITH #8 X 3" PAN HEAD SCREWS AS INDICATED ON CHART
- PLACE A U-SHAPED BEAD OF SEALANT ON THE SILL PANNING

NOTES:

- 1. FOR GENERAL SPECIFICATIONS, REFER TO DOC 00003952
- 2. THIS PRINT IS FOR STRUCTURAL PERFORMANCE ONLY. FOR FLASHING AND SEALING INSTRUCTIONS REFER TO THE INSTALLATION INSTRUCTIONS
- △ 3. SHIMS:

27575 8/22/2023

7/13/2021

DATE

25450


ECN NO

JΗ

JHS

REV BY

- PLACE SHIMS A MAX OF 6" FROM EACH CORNER AND 12" ON CENTER PLACE A SHIM WITHIN 1" OF EACH THRU JAMB SCREW
- 4. IF CHEMICALLY TREATED LUMBER IS USED FOR A BUCK MATERIAL, FASTENERS INTO THE BUCK MUST BE A MINIMUM OF 0.90 OZ/FT^2 ZINC HOT DIPPED GALVANIZED OR STAINLESS STEEL TYPE 304 OR 316
- △ 5. MINIMUM SCREW EMBEDMENT DEPTH: 1-13/16"
- △ 6. MINIMUM SCREW EDGE DISTANCE: 1"
 - 7. FOR THROUGH JAMB SCREW QUANTITY, REFER DOC 00114414, 00083628 OR 00083629
- △ 8. GLASS COMPLIES WITH ASTM E1300



GLAZING DETAIL

UNIT	MAX FRAME SIZE	DP RATING	
ELDHIN	42-1/16 X 84-1/2	+40/-40	
ELDHIN	54-1/16 X 84-1/2	+35/-35	
ELDHIN P	62 X 84-1/2	+40/-40	

THROUGH JAMB/ HEAD JAMB SCREW QUANTITIES						
FRAME TYPE HEADER FRAME TYPE JAME			JAMBS			
ELDHIN > 42" WIDE	2	ALL ≥ 36-1/2" TALL	3			
ELDHIN < 42"	0	ALL > 74-3/8"	4			

6	NA	SILICONE	
5	NA	SHIMS	
4	NA	INTERIOR STOPS OR TRIM	
3	NA	EXISTING BLIND STOP	
2	NA	TREATED FRAME MATERIAL	
1	00003264	#8-18 X 3.000" TYPE AB, FULL THREAD	
ITEM	DWG NO	DESCRIPTION	

PARTS LIST



RESEARCH & DEVELOPMENT

COLLECTION: ELEVATE

DWG TYPE: INSTALLATION

DESCRIPTION: INSTALLATION ELEVATION/METHOD, THROUGH JAMB

CHK:	JDD	SIZE:	CLASS:		DWG NO:		
09/13	3/23	В	ASSY			00	115532
APP:	CRR	SCALE:	DATE:	DWG BY	′ :		SHEET:
09/13	3/23	1/11	10/17/2018		f_justins		1 OF 2

Template Version 1

NOTICE - CONFIDENTIAL INFORMATION

CATEGORY:

DOUBLE HUNG

2 ADDED GLAZING DETAIL AND SIZE CHART

WEATHERSTRIP, UPDATED TEMPLATE

3/16" MAX SPACING

UNIT TYPE:

ELDHIN,

ADDED HEADER END PLUGS, UPDATED CHECKRAIL

DESCRIPTION / REQUESTOR

ELDHIN P

HEAD JAMB

1/4" MAX SPACING

JAMB

SILL

REV