



398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Product Evaluation Report

of

Mesker MBM, LLC
“N” Series Commercial Single Opaque Door – Outswing
(HVHZ) (Impact)

for

Florida Product Approval

FL# FL11218

Report No. 8390

Current Florida Building Code

Method:	1 – D (Engineering Evaluation)
Category:	Exterior Doors
Sub – Category:	Swinging Exterior Door Assemblies
Product:	“N” Series Commercial Single Opaque Door – Outswing
Materials:	Min. 18 Gauge Steel
Product Dimensions:	See Installation Instructions, MDI015

Prepared for:

Mesker MBM, LLC
3440 Stanwood Blvd.
Huntsville, AL 35811

Prepared by:

Hermes F. Norero, P.E.

Florida Professional Engineer # 73778

Date: 03/02/2023

Contents:


Evaluation Report Pages 1 – 3

 954.399.8478

 954.744.4738

 BUILDINGDROPS.COM

 CONTACT@BUILDINGDROPS.COM

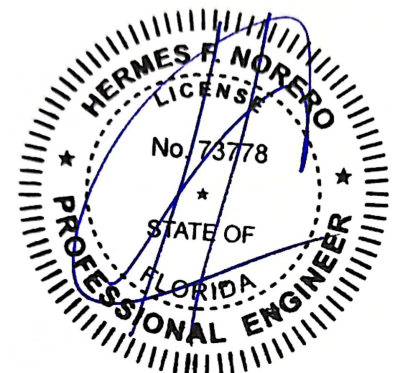

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Manufacturer: Mesker MBM, LLC

Product Category: Exterior Doors

Product Sub-Category: Swinging Exterior Door Assemblies

Compliance Method: State Product Approval Method (1)(d)

Product Name: "N" Series Commercial Single Opaque Door – Outswing (HVHZ) (Impact)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Mesker MBM, LLC** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **MDI015**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does not** require an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **MDI015** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **MDI015** for size and design pressure limitations.

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Quality Assurance: The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **National Accreditation & Management Institute, Inc.** (FBC Organization # QUA1789).

Performance Standards: The product described herein has been tested per:

- TAS 201-94
- TAS 202-94
- TAS 203-94

Referenced Data:

1. Product Testing performed by **Testing Evaluation Laboratories, Inc.**
(FBC Organization # TST4317)
Report #: TEL-08-02200007, Report Date: 02/07/08
Report #: TEL-01280050, Report Date: 08/20/08
Signed and Sealed by Wendell W. Haney, FL PE No. 54158
2. Quality Assurance
National Accreditation & Management Institute, Inc.
(FBC Organization # QUA1789)

Installation:

Refer to Installation Instructions (**MDI015**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**MDI015**) for design pressures based on size, configuration, and glass types.