



BUILDING DROPS

A Perfect Solution in Every Drop

Certificate of Authorization: 29578

398 East Dania Beach Blvd.

Suite 338

Dania Beach, FL 33004

954.399.8478 PH

954.744.4738 FX

contact@buildingdrops.com

Product Evaluation Report *of*

JELD-WEN, inc.
Builders Vinyl (V-2500) Double Hung Fixed Window

for

Florida Product Approval

Report No. 3040

Current Florida Building Code

Method: 1 – A (Certification)
Category: Windows
Sub – Category: Fixed

Product: *Builders Vinyl (V-2500) Double Hung Fixed Window*
Material: PVC
Product Dimensions: 72" X 72"


Prepared For:
JELD-WEN, inc.
3737 Lakeport Blvd.
Klamath Falls, OR. 97601

Prepared by:
Hermes Norero, P.E.
Florida Professional Engineer # 73778
Date: 07/23/2014

Contents:

Evaluation Report Pages 1 – 4
Installation Details Pages 5 – 6

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2015.05.21 07:32:12 -04'00'

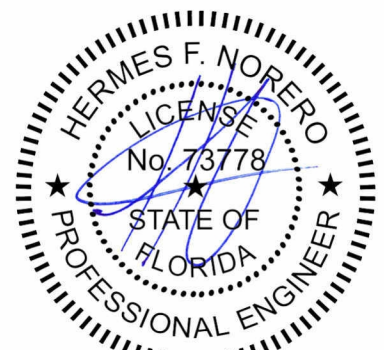

Hermes Norero, P.E.
Florida No. 73778



BUILDING DROPS

A Perfect Solution in Every Drop

Certificate of Authorization: 29578

Date: 07/23/2014

Report No: 3040

Manufacturer: JELD-WEN, inc.

Product Category: Windows

Product Sub-Category: Fixed

Compliance Method: State Product Approval Method (1)(a)

Product Name: Builders Vinyl (V-2500) Double Hung Fixed Window
72" X 72"

Scope: This is a Product Evaluation Report issued by Hermes Norero, P.E. (FL # 73778) for **JELD-WEN inc.** based on Method 1a of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **SJW2012-194-FBC**, signed and sealed by Hermes Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Section 1609.1.2 of the current Florida Building Code and does require an impact resistant covering.
4. Site conditions that deviate from the details of drawing **SJW2012-194-FBC** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **SJW2012-194-FBC** for size and design pressure limitations.



BUILDING DROPS

A Perfect Solution in Every Drop

Certificate of Authorization: 29578

Date: 07/23/2014

Report No: 3040

Certification Agency: The manufacturer has demonstrated compliance of products in accordance with the Florida Building Code for manufacturing under a Certification Agency through **American Architectural Manufacturers Association** (FBC Organization #CER1498)

Performance Standards: The product described herein has been tested per:

- AAMA/WDMA/CSA 101/I.S.2/A440-08

Referenced Data:

1. Product Testing performed by **National Certified Testing Laboratories** (FBC Organization # TST 9341)
Report #: SJW2012-194, Report Date: 12/06/2012
Report #: SJW2013-047, Report Date: 05/17/2013
2. Certification Agency
American Architectural Manufacturers Association
(FBC Organization #: CER1498)



BUILDING DROPS

A Perfect Solution in Every Drop
Certificate of Authorization: 29578

Date: 07/23/2014
Report No: 3040

Installation: 1. Approved anchor types and substrates are as follows:

Through Frame Installation:

- A. For two by (2X) wood frame substrate, use **#8 Wood Screw** type wood frame anchors of sufficient length to achieve minimum embedment of 1.50" into wood framing.
- B. For concrete or masonry substrate where one by (1X), non-structural, wood bucking is employed, use **3/16" diameter ITW Tapcon** type concrete screw anchors of sufficient length to achieve minimum embedment of 1.25" into concrete or masonry.
- C. For concrete or masonry substrate where wood bucking is NOT employed, use **3/16" diameter ITW Tapcon** type concrete screw anchors of sufficient length to achieve minimum embedment of 1.25" into concrete or masonry.
- D. For steel stud substrate, use **#8 ITW TEK Screw** type steel stud anchors of sufficient length to achieve minimum 3 threads penetration beyond steel structure.

Nail Fin Installation:

- A. For two by (2X) wood frame substrate, use **#8 Wood Screw** type wood frame anchors of sufficient length to achieve minimum embedment of 1.50" into wood framing.

Refer to Installation Instructions (**SJW2012-194-FBC**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Design Pressure	
Positive	50 PSF
Negative	50 PSF




BUILDING DROPS

A Perfect Solution in Every Drop
Certificate of Authorization: 29578

Date: 07/23/2014
Report No: 3040

Installation Method JELD-WEN, inc. Builders Vinyl (V-2500) Double Hung Fixed Window

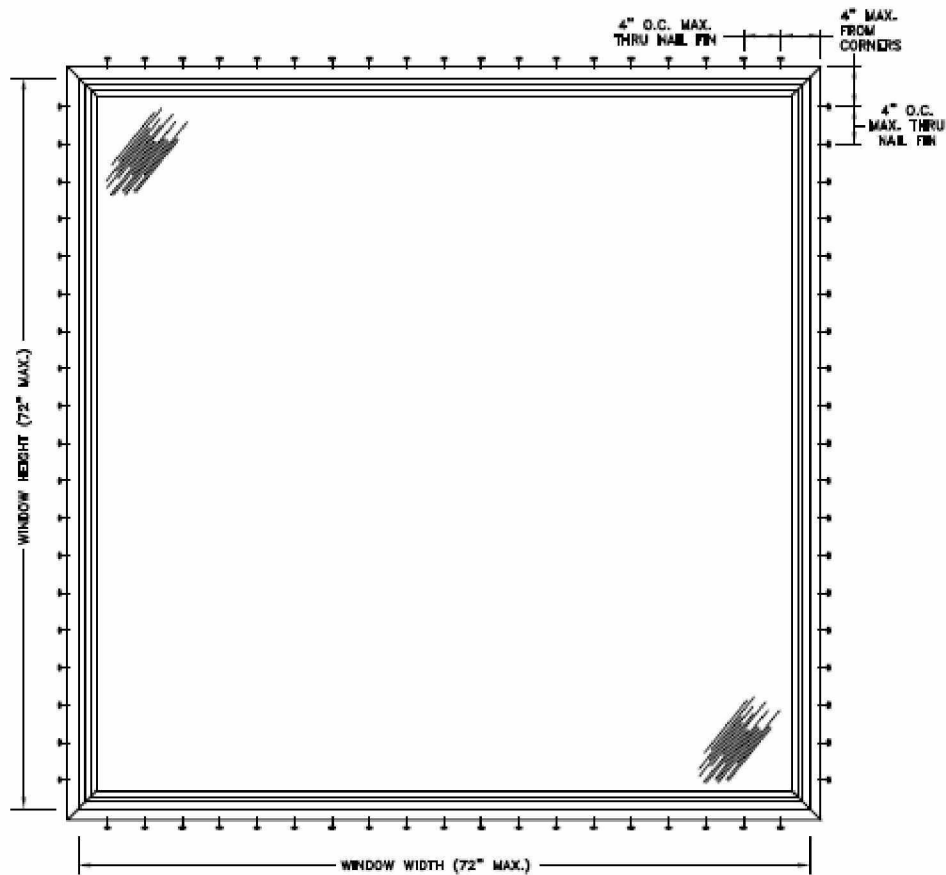

Nail Fin Installation




BUILDING DROPS

A Perfect Solution in Every Drop
Certificate of Authorization: 29578

Date: 07/23/2014
Report No: 3040

Installation Method JELD-WEN, inc. Builders Vinyl (V-2500) Double Hung Fixed Window

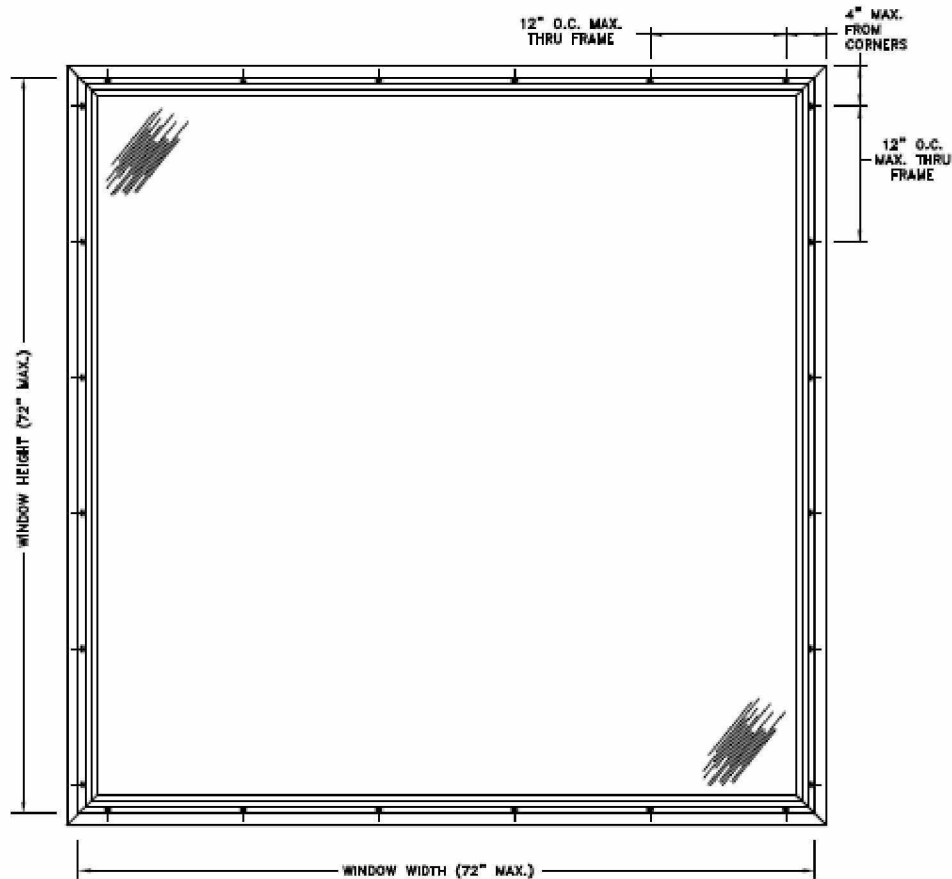

Through Frame Installation