



# BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

398 E. Dania Beach Blvd.  
Suite 338  
Dania Beach, FL 33004  
954.399.8478 PH  
954.744.4738 FX  
contact@buildingdrops.com

## Product Evaluation Report

of

**JELD-WEN, inc.**  
**Contours Steel Sidelite, Wood Edge**  
**6'-8" or 8'-0" Impact Glazed Fixed Sidelite**  
**(HVHZ)(Impact)**

for

**Florida Product Approval**

**Report No. 3394.2**

**Current Florida Building Code**


**Method: 1 – A (Certification Method)**  
**Category: Window**  
**Sub – Category: Fixed**

**Product: Contours Steel Door, Wood Edge**  
**Material: Wood/24 Ga. Steel**  
**Product Dimensions: 37.25" W x 96" H (Maximum)**

**Prepared for:**  
**JELD-WEN, inc**  
**3737 Lakeport Blvd.**  
**Klamath Falls, OR. 97601**

**Prepared by:**  
**Hermes F. Norero, P.E.**  
Florida Professional Engineer # 73778  
Date: 11/12/2020

Contents:  
Evaluation Report      Pages 1 – 3

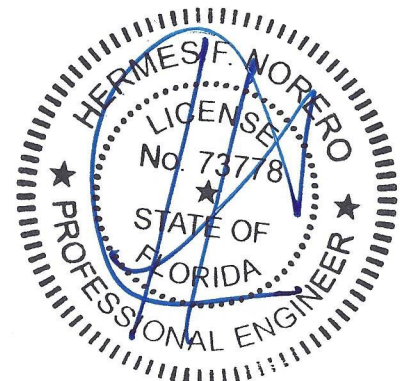

Hermes F. Norero, P.E.  
Florida No. 73778



# BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

Date: 11/12/2020

Report No:3394.2

---

**Manufacturer:** JELD-WEN, inc.

**Product Category:** Exterior Door

**Product Sub-Category:** Swinging Exterior Door Assemblies

**Compliance Method:** State Product Approval Method (1)(a)

**Product Name:** Contours Steel Door, Wood Edge

**Scope:** This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **JELD-WEN, inc.** based on Method 1a of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions provided by manufacturer for specific use parameters.

## Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and does not require an impact resistant covering.
4. Site conditions that deviate from the details of manufacturer require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions for size and design pressure limitations.

**Certification Agency:** The manufacturer has demonstrated compliance of door products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **National Accreditation and Management Institute** (FBC Organization #: CER1773)

Hermes F Norero, P.E.

Florida No.73778

Page 2 of 3



# BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

Date: 11/12/2020

Report No:3394.2

**Performance Standards:** The product described herein has been tested per:

- TAS 201-94
- TAS 202-94
- TAS 203-94

**Referenced Data:**

1. Product Testing performed by **National Certified Testing Laboratory, Inc.**  
(FBC Organization #: TST1589)  
Report #: NCTL-210-3194-1 Report Date: 09/28/2005  
Report #: SJW2011-073 Report Date: 06/29/2011  
Signed and Sealed by Kevin P. Tyra, P.E. No.72805
2. Component Material Testing of Dylite Expandable Polystyrene by  
**Intertek Testing Services NA, Inc.**  
ASTM E84  
Report#: 3113726SAT-001 R1 Report Date: 03/13/2009
3. Material Certification  
**Miami-Dade RER- product Control Section NOA**  
Eastman Chemical Company Saflex Clear and Color Glass Interlayer

**Installation:** Refer to Installation Instructions (**JW0509-05**) for anchor spacing and more details of the installation requirements.

**Design Pressure:** Refer to drawing (**JW0509-05**) for pressure information