

Evaluation Report DA0012r4
November 12, 2020

Product Description: Stormbreaker Plus 300VL Impact Resistant PVC Horizontal Roller Window, XO or OX Configuration, +/-50 PSF Design Pressure

Manufacturer: Simonton Windows, 1 Cochrane Ave., Pennsboro, WV

Statement of Compliance: This report evaluates the above-listed product per the requirements of FAC Product Approval Rule Chapter 61G20-3.005 (4). This product complies with the requirements of the 7th Edition (2020) Florida Building Code including the High Velocity Hurricane Zone. The product testing standards performed are outlined below.

Technical Documentation:


- 1) This report, prepared by Lucas A. Turner, P.E., at 2428 Old Natchez Trc Trl, Camden, TN
- 2) Installation drawing DA0012r4, signed and sealed by Lucas A. Turner, P.E.
- 3) Test Reports A9263.01-501-47 and B8415.01-501-18-r1, from Architectural Testing, Inc., Springdale, PA, TAS testing signed and sealed by Michael D. Stremmel, P.E., with testing performed: AAMA/WDMA/CSA 101/I.S.2/A440-08/11, TAS 201/202/203-94
- 4) Supplemental Calculations to support DA0012r4, signed and sealed by Lucas A. Turner, P.E.
- 5) Test Report ETC-97-264-4091.0 (report used for PVC extrusion Dade master file), from ETC Laboratories, Rochester, NY, signed and sealed by J. L. Doldan, P.E, with testing performed: ASTM D1929-96 Ignition Temperature, ASTM D2843-93 Smoke Density, ASTM D635-96 Rate of Burning, ASTM G26-95 UV Exposure for 4500 hours, ASTM D638-96
- 6) Statement of equivalency of tested flame, smoke, UV, and tensile standards, with those required per FBC 7th Ed. (2020) and Dade Plastics checklist #0445, signed/sealed by Lucas A. Turner, P.E.

Installation: Units must be installed according to installation drawing DA0012r4.

Limitations of Use: This product:

- May be used in the sizes and Design Pressures as shown in DA0012r4
- Requires 1" overall I.G. consisting of 1/8" tempered outboard, and inboard laminated glass made up of 1/8" annealed – 0.105" Solutia/Saflex PVB – 1/8" annealed
- Is Large Missile Impact Resistant and does not require the use of shutters
- May be used in the High Velocity Hurricane Zone
- Requires white SimEx, Inc. PVC extrusions in accordance with Technical Documentation 5) and 6) above, with current listing as an AAMA Certified Profile Licensee under AAMA 303
- Requires Eastman Solutia/Saflex HP PVB Interlayer per Miami-Dade NOA #20-0622.02.

Certification of Independence: I do not have, nor do I intend to acquire, nor will I acquire, a financial interest in Simonton Windows or in any company manufacturing or distributing products for which this report is being issued. I do not have, nor do I intend to acquire, nor will I acquire, a financial interest in any other entity involved in the testing or approval process of this product.

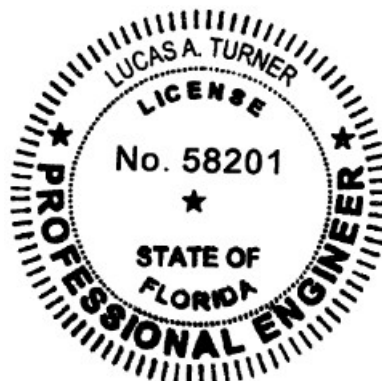

22

11/12/2020
Lucas A. Turner, P.E.
FL PE #58201