



BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

398 East Dania Beach Blvd.

Suite 338

Dania Beach, FL 33004

954.399.8478 PH

954.744.4738 FX

contact@buildingdrops.com

Product Evaluation Report

of

JELD-WEN, inc.

Siteline or W-5500 Clad Casement/Awning Mullions

for

Florida Product Approval

Report No. 7410

Current Florida Building Code

Method:	1-D (Engineering Evaluation)
Category:	Windows
Sub – Category:	Mullions
Product:	Siteline or W-5500 Clad Casement/Awning Mullions
Material:	Wood (Pine) w/ Aluminum 6063-T5 Cladding

Prepared for:

JELD-WEN, inc.

3737 Lakeport Blvd.

Klamath Falls, OR. 97601

Prepared by:

Hermes F. Norero, P.E.


Florida Professional Engineer # 73778

Date: 12/15/20

Contents:

Evaluation Report

Pages 1 – 3

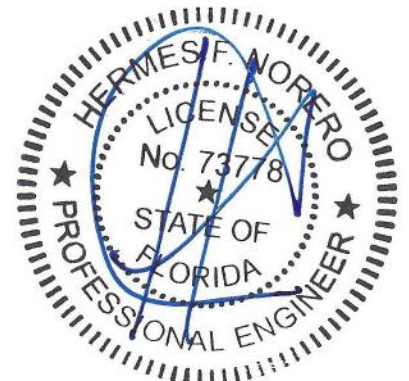

Hermes F. Norero, P.E.

Florida P.E. No. 73778



BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

Date: 12/15/20

Report No: 7410

Manufacturer: JELD-WEN, inc.

Product Category: Windows

Product Sub-Category: Mullions

Compliance Method: State Product Approval Method (1)(d)

Product Name: Siteline or W-5500 Clad Casement/Awning Mullions

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **JELD-WEN inc.** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the Current Florida Building Code (FBC).

See Installation Instructions **JW060**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the Current Florida Building Code, excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the Current Florida Building Code and does not require an impact resistant covering in Wind Zones 3 or less provided window assemblies are minimum Wind Zone 3 impact rated. In Wind Zone 4, units shall require impact resistant protection.
4. Site conditions that deviate from the details of Installation Instructions **JW060** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **JW060** for size and design pressure limitations.



BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

Date: 12/15/20

Report No: 7410

Quality Assurance: The manufacturer has demonstrated compliance of products in accordance with the Florida Building Code and Florida Product Approval system for manufacturing under a quality assurance program audited by an approved quality assurance entity through **Window and Door Manufacturers Association**. (FBC Organization # QUA2515)

Performance Standards: The product described herein has been tested per:

- AAMA 450-10

Referenced Data:

1. Product Testing performed by **Architectural Testing, Inc./Intertek** (FBC Organization # TST2609)
Report: F4256.01-301-47-r0, Report Date: 03/10/16
Report: F4258.01-301-47-r1, Report Date: 06/03/16
Report: F4260.01-301-47-r0, Report Date: 03/10/16
Report: F4262.01-301-47-r0, Report Date: 03/10/16
Report: F4262.02-301-47-r0, Report Date: 04/12/16
Report: F4263.01-301-47-r0, Report Date: 04/12/16
Report: NCTL-310-18-073, Report Date: 01/11/19
Report: NCTL-310-20-021 E1A0, Report Date: 01/28/20
Report: NCTL-310-20-024 E0A0, Report Date: 02/19/20
Report: I8039.01-301-47 r0, Report Date: 09/17/18
Report: L5198.01-301-47 r0, Report Date: 04/12/16
2. Quality Assurance
Window and Door Manufacturers Association
(FBC Organization #: QUA2515)
3. ICC Evaluation Report, ESR-1539

Installation:

Refer to Installation Instructions (**JW060**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**JW060**) for design pressures dependent on mull assembly, configuration, and size of units.

Hermes F. Norero, P.E.

Florida P.E. No. 73778

Page 3 of 3