

L. Roberto Lomas P.E.

208 7th Avenue
Indialantic, 32903
434-688-0609 (phone fax)
rllomas@lrlomaspe.com

Client: Masonite
Report: 514014C
Date: 12/20/2023

Test Report: N/A
Product: Single door 3'x6'8" (Composite frame)

Scope:
This analysis provides calculations, quantities, and spacing requirements for installing product to substrate, and it applies only to the product described herein. These calculations comply with requirements of the Florida Building Code 8th edition (2023).


Anchor capacity in shear condition:

Solid members w/ & w/out gap:

a. With threads present in shear plane

Fastener type: #10 wood screw			(NDS 2018, TR12)		
Nominal diameter:	D:	0.190 in	Gap:	g:	0.0000 in
Root diameter:	Dr:	0.152 in	Moment arm:		0.0000 in
Minimum required penetration:	p:	1.140 in	Screw bending yield strength:	Fyb =	80,000 psi
Side member:	PVC		Main member:	Spruce-Pine-Fir (G=0.42)	
Side member thickness:	ts =	1.000 in	Main member thickness:	tm =	1.500 in
Side member dowel bearing strength:	Fes =	10,000 psi	Main member dowel bearing strength:	Fem =	3,350 psi
Side member dowel bearing length:	ls =	1.000 in	Main member dowel bearing length:	lm =	1.140 in
Mode Im			Mode III_m		
qm =	636.5 lbs/in		A:	0.00066	
P =	725.61 lbs		B:	0.57	
Kb =	2.400		C:	-253.623	
Zm =	302 lbs		Ms =	46.8 in-lbs	
			P =	324 lbs	
			Kb =	2.400	
			Z =	135 lbs	
Mode Is			Mode III_s		
qs =	1900 lbs/in		A:	0.00092	
P =	1900 lbs		B:	0.5	
Kb =	2.400		C:	-521.824	
Zs =	792 lbs		Mm =	46.8 in-lbs	
			P =	529 lbs	
			Kb =	2.400	
			Z =	221 lbs	
Mode II			Mode IV		
A:	0.0005		A:	0.001049	
B:	1.07		B:	0.000	
C:	-681.799		C:	-93.6	
P =	510 lbs		P =	299 lbs	
Kb =	2.400		Kb =	2.400	
Z =	212 lbs		Z =	125 lbs	
Min. Design value:	Z =	125 lbs			
Duration Factor:	Cd =	1.6			
Allowable Design Value (ZCd):	Z' =	199 lbs/anchor			

Fastener type: 1/4 ITW Tapcon			Tabulated values		
N.O.A. 21-0201.06					
Substrate: Hollow block					
Minimum embedment:	1.25 in				
Actual edge distance:	2.50 in				
Actual C To C spacing:	3.00 in				
Allowable Design Value:	Z'' =	155 lbs/anchor (per interpolation when needed)			
Fastener type: #10 Self tapping screw			(Calculations per 2020 Aluminum Design Manual)		
Nominal screw diameter:	D:	0.190 in	Screw root area:	Ar	0.0151 in ²
Actual edge distance:	de:	1.085 in	Screw shear ultimate strength:	Fsu	54.0 ksi
Side member material: Vinyl PVC			Per table J3.2 of 2010 Steel Construction Manual 14th Edition		
Thickness:	t1	1.000 in	Main member material: 6063-T5 aluminum		
Ultimate tensile strength:	Ftu1	14 ksi	Thickness:	t2	0.052 in
Nominal strength per bearing (side member):	Rn = 2Dt1Ftu1		Ultimate tensile strength:	Ftu2	22 ksi
Nominal strength per bearing (main member):	Rn = 2Dt2Ftu2		Rn1 =	5320 lbs	(Eq J.5-12)
Nominal strength per tilting:	Rn = 4.2(t2 ³ D) ^{1/2} Ftu2		Rn2 =	435 lbs	(Eq J.5-12)
Nominal screw shear strength:	Rn = ArFsu/1.25		Rn =	478 lbs	(Eq J.5-13)
Safety factor:	Ω =	3	Rn =	654 lbs	(Eq J.5-14)
Allowable shear and bearing capacity:	Pas	145 lbs/anchor			

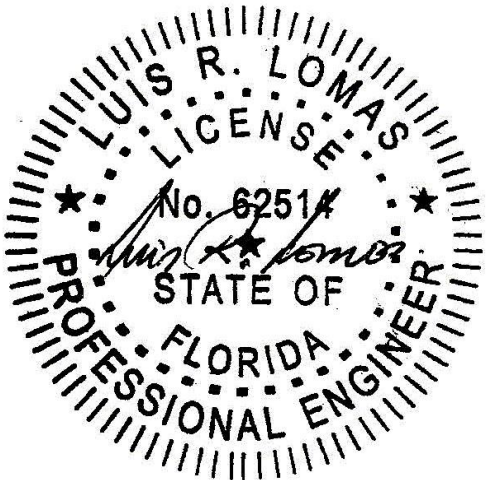

Luis R. Lomas P.E.
FL No.: 62514
12/20/2023

L. Roberto Lomas P.E.


208 7th Avenue
Indialantic, 32903
434-688-0609 (phone fax)
rllomas@lrlomaspe.com

Client: Masonite
Report: 514014C
Date: 12/20/2023

Fastener type:	#10 Self tapping screw	(Calculations per AISI S100-16 and AISC 2017)
Nominal screw diameter:	D: 0.190 in	Screw shear ultimate strength: F_{su} 54.0 ksi
Screw root area:	A_r 0.0151 in ²	Per table J3.2 of 2010 Steel Construction Manual 14th Edition
Side member material:	Vinyl PVC	Main member material: Metal framing
Thickness:	t_1 1.000 in	Thickness: t_2 0.048 in
Ultimate tensile strength:	F_{u1} 14 ksi	Ultimate tensile strength: F_{u2} 52 ksi
Nominal strength per tilting:	$R_n = 4.2(t_2^3 D)^{1/2} F_{u2}$	$R_n =$ 1001 lbs (Eq E4.3.1-1)
Nominal strength per bearing (side member):	$R_n = 2.7 D t_1 F_{u1}$	$R_{n1} =$ 7182 lbs (Eq E4.3.1-2 and -4)
Nominal strength per bearing (main member):	$R_n = 2.7 D t_2 F_{u2}$	$R_{n2} =$ 1280 lbs (Eq E4.3.1-3 and -5)
Nominal screw shear strength:	$R_n = A_r F_{su} / 1.25$	$R_n =$ 654 lbs
Safety factor:	$\Omega = 3$	
Allowable shear and bearing capacity:	P_{as} 218 lbs/anchor	
Minimum anchor capacity:	145 lbs/anchor	



Note: Anchors with the least capacity is used for calculations to qualify anchors with higher capacity.

Anchor calculations, minimum required anchors



		Design pressure: 85.0 psf						
Zone	Area (ft ²)	Load (lbs)	Ind. (in)	Max. O.C. (in)	Anchor			Result
					Cap. (lbs)	Qty	Load (lbs)	
A ₁	2.3	195	N/A	N/A	145	2	98	OK
A ₂	7.7	656	6.00	18.00	145	5	131	OK

Anchor Locations:

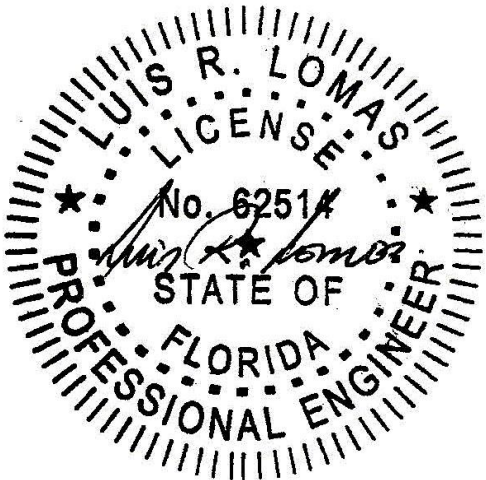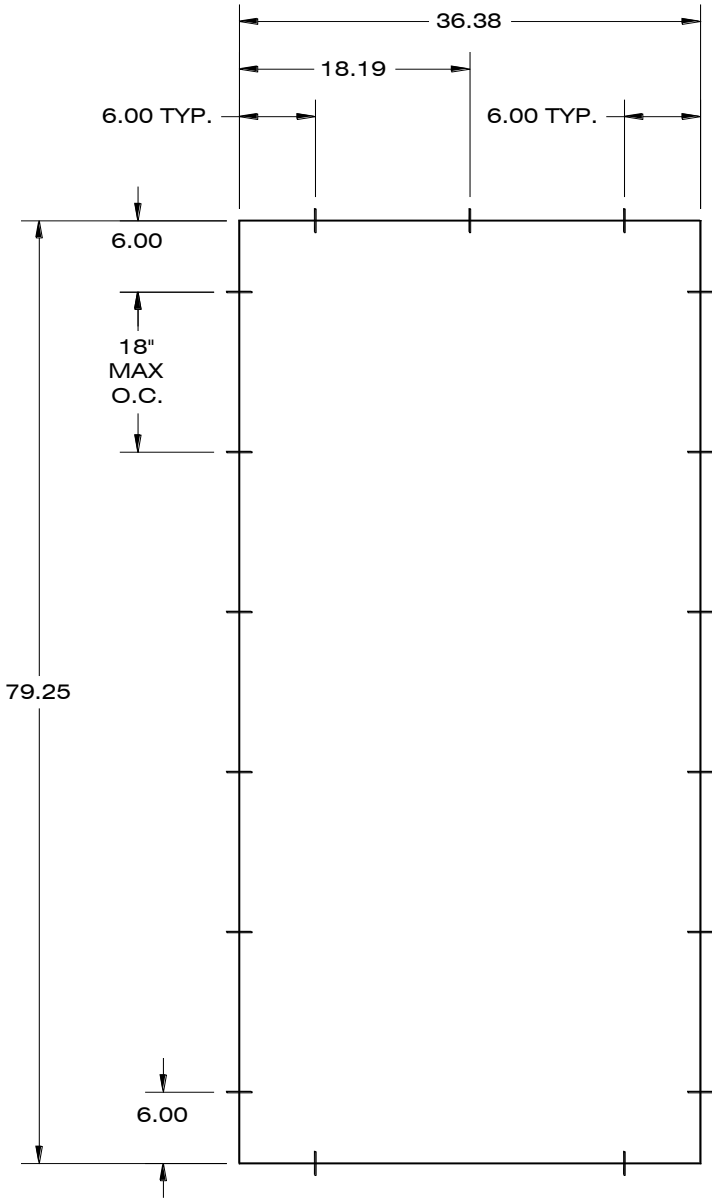

Luis R. Lomas P.E.
FL No.: 62514
12/20/2023


L. Roberto Lomas P.E.

208 7th Avenue
Indialantic, 32903
434-688-0609 (phone fax)
rllomas@lrlomaspe.com

Client: Masonite
Report: 514014C
Date: 12/20/2023

Installation instructions:

1. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 1/2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN BELOW.
2. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 1/4" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2 1/2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN BELOW.
3. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL WITH 1/2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN BELOW.
4. ALL FASTENERS TO BE CORROSION RESISTANT.
5. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI .052" THICK MINIMUM
6. ANCHOR LOCATIONS SHOWN IN THIS DOCUMENT ARE THE MINIMUM REQUIRED FOR THE DESCRIBED PRODUCT EXPOSED AT THE DESIGN PRESSURE INDICATED HEREIN.
7. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
8. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
9. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
10. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
11. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.

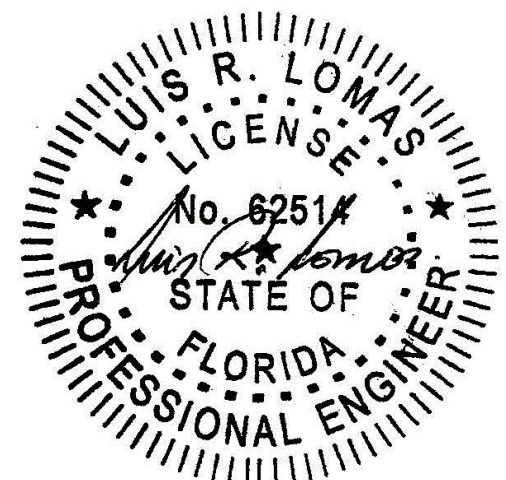

Luis R. Lomas P.E.
FL No.: 62514
12/20/2023