



398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Product Evaluation Report

of

**Marco Industries
Python™ Rolled Ridge Vent**

for

Florida Product Approval

FL# FL39162

Report No. 7891

Current Florida Building Code


Method:	1 – A (Certification)
Category:	Roofing
Sub – Category:	Roofing Accessories that are an Integral Part of the Roofing System
Product:	Python™ Rolled Ridge Vent
Materials:	Polypropylene

Prepared for:

Marco Industries
4150 S. 100th E. Avenue, Suite 301
Tulsa, OK 74146

Prepared by:

Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 02/23/2022

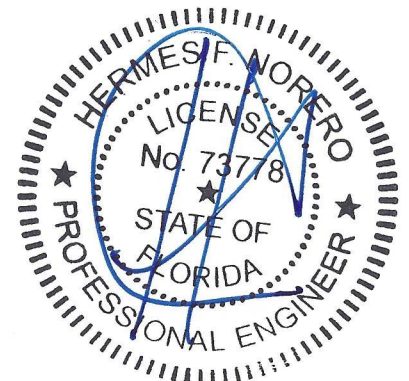

Contents:

Evaluation Report Pages 1 – 3

Hermes F. Norero, P.E.
Florida No. 73778

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Manufacturer: Marco Industries

Product Category: Roofing

Product Sub-Category: Roofing Accessories that are an Integral Part of the Roofing System

Compliance Method: State Product Approval Method (1)(a)

Product Name: Python™ Rolled Ridge Vent

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Marco Industries** based on Method 1a of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See applicable manufacturer's installation instructions for specific use parameters and installation procedures.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the "High Velocity Hurricane Zone" (HVHZ).
2. Refer to applicable Building Code required ventilation.
3. Python™ Rolled Ridge Vent are approved to be installed over asphalt shingles.
4. Python™ Rolled Ridge Vent approved to be installed on roofs with minimum pitch of 2:12.
5. Python™ Rolled Ridge Vent shall not be installed on roof mean heights greater than 33 feet.
6. The installation shall be applied in compliance with the manufacturer's current published application instructions and the requirements set forth in applicable building code.
7. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.

8. Site conditions that deviate from the details of applicable manufacturer's installation instructions require further engineering analysis by a licensed engineer or registered architect.
9. Product design pressures shall be compared to "ASD" component and cladding wind loads as determined in accordance with Chapter 16.

Certification Agency: The manufacturer has demonstrated compliance of manufacture of products in accordance with the Florida Building Code for manufacturing under an approved certification agency through **National Accreditation & Management Institute, Inc.** (FBC Organization # CER1773).

Performance Standards: The product described herein has been tested per:

- TAS 100(A)-95

Referenced Sections: The product described herein has been evaluated for compliance with the Current Edition Florida Building Code per the following code sections:

- 1523.6.5.2.13
- 1609.1

Referenced Data:

1. Product Testing performed by **PRI Construction Materials Technologies, LLC** (FBC Organization # TST5878)
Report #: L7628.01-801-18-R1, Report Date: 05/25/21
Report Signed and Sealed by Tyler Westerling, FL PE No. 72012

Installation:

Refer to applicable manufacturer's installation instructions for anchor spacing and more details of the installation requirements.

Dimension and Wind Resistance:

Refer to product certification (**NI015286-R1**) for product rating and resistant windspeed.