



1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Product Evaluation Report

of
ODL, Inc.
Outswing Opaque Fiberglass Door
(HVHZ) (Impact)

for
Florida Product Approval

FL# FL47392

Report No. 9721

Current Florida Building Code


Method:	1 – D (Engineering Evaluation)
Category:	Exterior Doors
Sub – Category:	Swinging Exterior Door Assemblies
Product:	Outswing Opaque Fiberglass Door (HVHZ) (Impact)
Materials:	Varies
Product Dimensions:	See Installation Instructions, ODL003

Prepared for:

ODL, Inc.
215 East Roosevelt Ave.
Zeeland, Michigan, 4946-4

Prepared by:

Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 03/14/2025

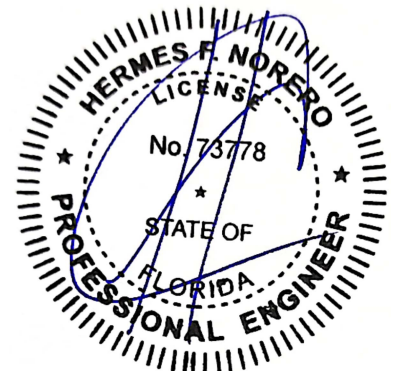

Contents:

Evaluation Report Pages 1 – 4

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Manufacturer: ODL, Inc.

Product Category: Exterior Doors

Product Sub-Category: Swinging Exterior Door Assemblies

Compliance Method: State Product Approval Method (1)(d)

Product Name: Outswing Opaque Fiberglass Door (HVHZ) (Impact)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **ODL, Inc.** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **ODL003**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does not** require an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **ODL003** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **ODL003** for size and design pressure limitations.

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Quality Assurance: The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **Keystone Certifications, Inc.**
(FBC Organization #QUA1824)

Performance Standards: The product described herein has been evaluated per:

- TAS 201-94
- TAS 202-94
- TAS 203-94

Referenced Data:

1. Product Testing performed by **QAI Laboratories, Inc.**
(FBC Organization #1657)
Report #: MED-2226a Report Date: 02/24/2025
Report #: MED-2226b Report Date: 02/24/2025
TAS reports signed and sealed by Andrew V. Tan, P.E. No. 81662
2. Quality Assurance
Keystone Certifications, Inc.
(FBC Organization #QUA1824)
3. Material Certification
Miami-Dade County Notice of Acceptance
Eastman Chemical Company
Saflex PVB Interlayer
4. Material Certification performed by **Testing Evaluation Laboratories, Inc.**
(FBC Organization #TST4317)
Report #: TEL04503861D Report Date: 10/23/2024
Report #: TEL04503860D Report Date: 10/23/2024
Report #: TEL04503860A Report Date: 07/05/2024
Report #: TEL04503860B Report Date: 07/05/2024
Report #: TEL04503860C Report Date: 07/05/2024
Report #: TEL04503861A Report Date: 07/05/2024
Report #: TEL04503861B Report Date: 07/05/2024
Report #: TEL04503861C Report Date: 07/05/2024

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Installation:

Refer to Installation Instructions (**ODL003**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**ODL003**) for design pressures based on size, configuration, and glass types.