



1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

## Product Evaluation Report

*Of*

**ODL, Inc.**

**Inswing & Outswing Flush Glazed Fiberglass Door  
(Non-HVHZ) (Non-Impact)**

*For*

**Florida Product Approval**

**FL# FL47925**

**Report No. 10216**

### Current Florida Building Code

<b>Method:</b>	<b>1 – D (Engineering Evaluation)</b>
<b>Category:</b>	<b>Exterior Doors</b>
<b>Sub – Category:</b>	<b>Swinging Exterior Door Assemblies</b>
<b>Product:</b>	<b>Inswing &amp; Outswing Flush Glazed Fiberglass Door (Non-HVHZ) (Non- Impact)</b>
<b>Materials:</b>	<b>Fiberglass</b>
<b>Product Dimensions:</b>	<b>See Installation Instructions, ODL014</b>

### Prepared for:


**ODL, Inc.**  
**215 East Roosevelt Ave.**  
**Zeeland, Michigan 49464**

### Prepared by:

**Hermes F. Norero, P.E.**  
Florida Professional Engineer #73778  
Date: 12/01/2025

### Contents:

Evaluation Report      Pages 1 – 3

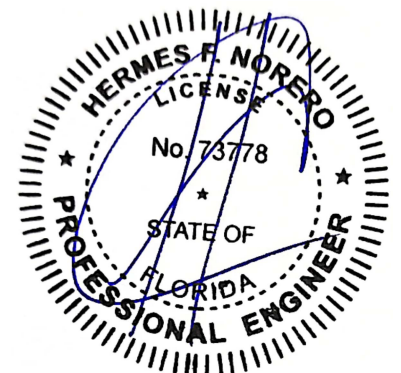

Hermes F. Norero, P.E.  
Florida No. 73778

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

**Manufacturer:** ODL, Inc.  
**Product Category:** Exterior Doors  
**Product Sub-Category:** Swinging Exterior Door Assemblies  
**Compliance Method:** State Product Approval Method (1)(d)  
**Product Name:** Inswing & Outswing Flush Glazed Fiberglass Door  
(Non-HVHZ) (Non-Impact)

**Scope:** This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **ODL, Inc.** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **ODL014**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

**Limits of Use:**

1. This product has been evaluated and is in compliance with the current Florida Building Code, **excluding** the “High Velocity Hurricane Zone” (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does require** an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **ODL014** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **ODL014** for size and design pressure limitations.

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

**Quality Assurance:** The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **Keystone Certifications, Inc.** (FBC Organization #QUA1824)

**Performance Standards:** The product described herein has been evaluated per:

- ASTM E330-14
- ASTM E331-00
- ASTM E283-04

**Referenced Data:**

1. Product Testing performed by **IFET, Inc.** (FBC Organization #TST14775)  
Report #: TR-IFET-25-0051                      Report Date: 09/19/2025  
Signed and sealed by Arshad Viqar, P.E. No. 38863
2. Product Testing performed by **Testing Evaluation Laboratories, Inc.** (FBC Organization #TST4317)  
Report #: TEL 01313865                      Report Date: 08/16/2024  
TEL 01313864                              08/13/2024  
TEL 01313855-B                          02/03/2025  
TEL 01313863A                          11/14/2024
3. Quality Assurance  
**Keystone Certifications, Inc.**  
(FBC Organization #QUA1824)

**Installation:** Refer to Installation Instructions (**ODL014**) for anchor spacing and more details of the installation requirements.

**Design Pressure:** Refer to Installation Instructions (**ODL014**) for design pressures based on size, configuration, and glass types.