


PETERSEN ALUMINUM CORPORATION
Tite-Loc Plus Panel
(Max. 18" wide, nom. 0.040" thick aluminum panel)

Description	Clip Spacing (ft)	Uplift Design Load (psf)
Coverage width: Maximum 18" Minimum 12" Sliding Clip with (2) fasteners per clip	1	202.5
	1.5	184.2
	2	140.0
	2.5	112.0
	3	93.3
	3.5	80.0
	4	70.0
	4.5	62.2
	5	56.0

Notes:

1. The bold numbers indicate design loads calculated from test data with safety factor of 2.
2. The design loads for other spans are based on linear interpolation.
3. Panels must be installed as per Evaluation Report FL 5562.4 and Petersen Aluminum current installation procedure.

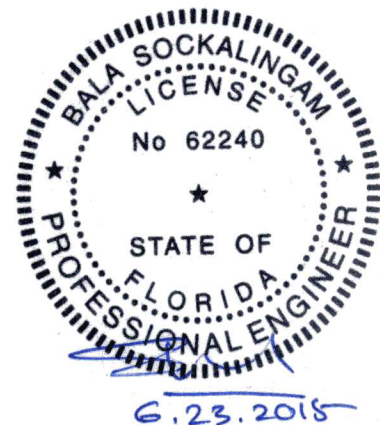

1216 N Lansing Ave. Suite C
Tulsa, OK 74106
918 492 5992

Bala Sockalingam, Ph.D., P.E.
FL 62240