

WINDOW HEIGHT (36" MAX.) TYPICAL ELEVATION WITH FASTENER SPACING WINDOW WIDTH (72" MAX.) 4" MAX. FROM CORNERS 8" O.C.

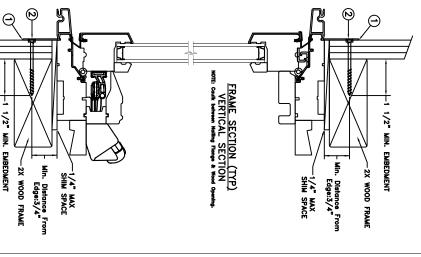

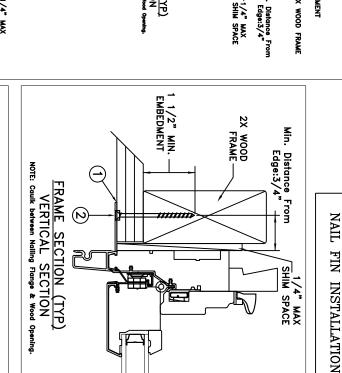

Max Frame 36 +50, P /-55 IMPACT <u>N</u>0

Installed Fastener Schedule:

- Seal flange/frame to substrate.
- Use #8 PH or greater fasteners through nail fin with sufficient length to penetrate a minimum of 1 1/2" into the wood framing. For 2X wood frame substrate (min. S.G. = 0.42).
- ယ Host structure (wood buck, stud framing and opening) to be designed and anchored to properly transfer all project of installation. loads to the structure. The host structure is the responsibility of the architect or engineer of record for the

www.jeld-wen.com/resources/installation. packaged with the window or go to conditions. For the complete installation procedure, see the instructions not address the sealing consideration that may arise in different wall noted. It is not intended as a guide to the installation process and does window to achieve the rated design pressure up to the size limitations This schedule addresses only the fasteners required to anchor the

DISCLAIMER:

except as authorized by JELD-WEN Inc. reproduced or copied in whole or in part or used or disclosed to others This drawing and its contents are confidential and are not to be

General Notes:

- Buck, framing and masonry by others and is responsibility of architect or engineer of record Building Code (FBC) and the industry standard requirement for the stated conditions. the adopted International Building Code (IBC), the International Residential Code (IRC), the Florida The product shown herein is designed, tested and manufactured to comply with the wind load criteria of
- 0 2 4 0 All glazing shall conform to ASTM E1300.

 - At minimum, glazing shall be double strength annealed insulating glass.
- Maximum sizes are buck sizes and do not include fin or flange.

_				
	K. Campbell	01/21/2015	3737 LAKEPORT BLVD	3737 LAKEPORT BLVD.
	DRAWN BY: D. Vezo	SCALE: NTS		PHONE: (541) 882-3451
	CHECKED BY: K. Campbell	TITLE:		
	APPROVED BY D. Stokes		Siteline Clad Awning Window	Indow
	PART/PROJECT No.: D009406		Nali i III III Stalladioii (72 × 30)	> 00)
	IDENTIFIER No.	PLANT NAME AND LOCATION	ON: CAD DWG, No.:	REV: OO SHEET 1 Of 1
	•	Rantoul, IL		101.