



MASTER WALL® EIFS SYSTEMS: AGGRE-FLEX CLASS PB EIFS; AGGRE-FLEX DRAINAGE™ CLASS PB EIFS; ROLLERSHIELD DRAINAGE™ CLASS PB EIFS; and QRW1 DRAINAGE™ CLASS PI EIFS

CSI SECTION: 07 24 00—Exterior Insulation and
Finish Systems

CSI SECTION: 07 42 43—Composite Wall Panels

1.0 RECOGNITION

Master Wall® EIFS systems recognized in this report have been evaluated for use as exterior, non-bearing, insulation and wall finishes in compliance with IBC Section 1408 and IRC Section R703.9 over exterior walls or used as interior wall finish material. The EIFS systems have been evaluated for structural strength, weather resistance, water-resistive barrier, water drainage, surface-burning characteristics, ignition resistance, noncombustible construction, and installation, as applicable. The Master Wall® EIFS systems evaluated in this report are satisfactory alternatives to the following codes and regulations:

- 2015, 2012 and 2009 International Building Code® (IBC)
- 2015, 2012 and 2009 International Residential Code® (IRC)
- ASTM E2568, ASTM E2273 and ASTM E2570
- ICC-ES AC219, AC235, AC212
- 2014 Florida Building Code, Building (FBC, Building) – Supplement attached
- 2014 Florida Building Code, Residential (FBC, Residential) – Supplement attached

2.0 LIMITATIONS

Use of the Master Wall® EIFS systems recognized in this report are subject to the following:

2.1 “Foam plastic shall be separated from the interior of a building by an approved thermal barrier” in accordance with IBC Section 2603.4 or IRC Section R316.4, as applicable.

2.2 Installation shall be by applicators acceptable to Master Wall®, Inc.

2.3 “The clearance between foam plastic installed above grade and exposed earth shall be not less than 6 inches (152 mm).” in accordance with 2015 IBC Section 2603.8, 2012 IBC Section 2603.9, 2009 IBC Section 2603.8, and IRC Section R318.4, as applicable.

2.4 Adequacy of fasteners for attaching foam plastic insulation boards to brick, masonry, concrete, and cement

plaster substrates shall comply with Section 4.2.4.3 of this report.

2.5 Exterior use of the Master Wall®, Inc., EIFS shall conform to Sections 3.1.1 through 3.1.4 of this report, and interior use of the Master Wall® EIFS system lamina (base coats, mesh, and finish coats) shall to conform Section 3.5 of this report.

2.6 Special inspection shall be provided as required by IBC Section 1408.6.

3.0 PRODUCT USE

3.1 Exterior Insulation and Finish Systems (EIFS)

3.1.1 Master Wall® Aggre-Flex Class PB EIFS is used on the exterior walls of buildings of framed construction under the IRC and Type V Group R1, R2, R3 and R4 Occupancies under the IBC, and in Type I, II, III, or IV construction under the IBC when installed in accordance with Section 3.12 of this report.

Exception: Master Wall® Aggre-Flex Class PB EIFS system is recognized for use on concrete or masonry walls of buildings of Type V construction.

3.1.2 Master Wall® Aggre-Flex Drainage™ Class PB EIFS is used on the exterior walls of “framed construction under the IRC and Type V Group R1, R2, R3 and R4 Occupancies and under the IBC [AC235]”, and provides drainage of incidental water entering the system in accordance with IBC Section 1408.4.1 and IRC Section R703.9.

3.1.3 Master Wall® Rollershield Drainage™ Class PB EIFS is used on the exterior walls of framed construction under the IRC and Type V Group R-1, R-2, R-3 and R-4 Occupancies under the IBC, and in Type I, II, III, or IV construction under the IBC when installed in accordance with Section 3.13 of this report. The system provides drainage of incidental water entering the system in accordance with IBC Section 1408.4.1 and IRC Section R703.9.

3.1.4 Master Wall® QRW1 Drainage™ Class PI EIFS is used on the exterior walls of “framed construction under the IRC and Type V Group R1, R2, R3 and R4 Occupancies under the IBC” [AC235]”, and provides drainage of incidental water entering the system in accordance with IBC Section 1408.4.1 and IRC Section R703.9.

3.1.5 Interior Use: Interior use of the Master Wall EIFS system lamina (base coats, mesh, and finish coats) is permitted in accordance with IBC Section 803.1 and IRC Section R302.9, provided the lamina components are

The product described in this Uniform Evaluation Service (UES) Report has been evaluated as an alternative material, design or method of construction in order to satisfy and comply with the intent of the provision of the code, as noted in this report, and for at least equivalence to that prescribed in the code in quality, strength, effectiveness, fire resistance, durability and safety, as applicable, in accordance with IBC Section 104.11.

Copyright © 2016 by International Association of Plumbing and Mechanical Officials. All rights reserved. Printed in the United States. No part of this publication may be reproduced, stored in an electronic retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of the publisher. Ph: 1-877-4IESRPT • Fax: 909.472.4171 • web: www.uniform-es.org • 4755 East Philadelphia Street, Ontario, California 91761-2816 – USA





installed without foam plastic insulation boards. The Master Wall® Foam & Mesh (F&M) Adhesive/Base coat, standard mesh, and Master Wall® Finish coat described in this report have a Class A interior finish rating as defined in IBC Section 803.1.1 (flame-spread index 0-25; smoke-developed index 0-450) when applied to substrates of brick, concrete masonry, concrete, or gypsum wallboard.

3.2 General Installation Requirements

3.2.1 Master Wall® EIFS shall be installed in accordance with this report; the manufacturer's published installation instructions, specifications, applicable technical bulletins, and details; and applicable sections of the IBC or IRC. In the event of a conflict between the manufacturer's instructions and this report, the more restrictive governs. The manufacturer's installation instructions for the systems evaluated in this report are available at www.masterwall.com.

3.2.2 "Installation shall be by a (sic) applicator recognized by the applicant (Master Wall®, Inc.) as being trained to perform such installations. A list of the names and addresses of recognized contractors shall be maintained by the applicant, and shall be available to the building official . . . upon request." [AC219, AC235]

3.2.3 "The underlying structural framing and substrate shall be designed and constructed to resist loads as require by Chapter 16" of the IBC, in accordance with Section 1408.3 of the IBC.

3.2.4 Expansion joints shall be required in the EIFS systems where the substrate material changes, at floor lines in wood-frame construction in which lumber shrinkage will occur, where the EIFS abuts another material, and where structural movement is anticipated. "When the EIFS is placed over platform-frame construction with dimensional lumber, control joints are required at each floor level." [AC219, AC235] Control joints shall be installed as specified by the designer or design professional.

3.2.5 An approved sealant, described in Section 4.2.2.5, shall be applied at EIFS terminations, exposed joints, floor lines of wood-frame construction, changes in building shape or roof line, substrate changes, and expansion joints. The sealant shall be bonded to the base coat, not to the finish coat. All edges of the system, except at drainage track locations, shall be back-wrapped or edge-wrapped. The details of sealant installation, including width and thickness of the sealant, shall be designed by a design professional.

3.2.6 "Maximum allowable deflection of structural wall components shall be specified and shall be limited to a maximum (1/240) of span, except where more restrictive requirements prevail." [AC219, AC235].

3.2.7 Substrates shall be structurally sound, clean, dry, and smooth, with all dust and deleterious material removed. There shall be no planar irregularities exceeding ¼ inch (6.3 mm) in a 10-foot (3.04 m) radius.

3.2.8 All exposed edges of the insulation board shall be wrapped with the reinforcing fabric and embedded in the base coat; alternatively, an approved plastic trim accessory shall be used.

3.2.9 Corrosion-resistant flashing shall be provided as part of the Master Wall® EIFS systems and shall be in accordance with IBC Section 1405.4 or IRC Section R703.4.

3.3 Installation of Aggre-Flex Class PB EIFS

3.3.1 A water-resistive barrier is not required for installation of this system.

3.3.2 Foam plastic insulation boards are adhered to the approved substrate in accordance with Section 3.7 of this report or are mechanically fastened to the approved substrate in accordance with Section 3.8 of this report.

3.3.3 The base coat, reinforcing mesh, and the finish coat shall be installed in accordance with Sections 4.8 and 4.9 of this report.

3.3.4 Special inspection is not required for Aggre-Flex Class PB EIFS when installed over masonry or concrete walls in accordance with Exception 2 to 2015 IBC Section 1705.16, or 2012 IBC Section 1705.15, 2009 IBC Section 1704.14, as applicable.

3.4 Installation of Aggre-Flex Drainage Class PB EIFS

3.4.1 A water-resistive barrier and weather-protection components complying with Section 4.2.2 of this report shall be installed in accordance with applicable sections of the IBC or IRC.

3.4.2 A drainage track, as described in Section 4.2.2.7 of this report, shall be installed at all horizontal terminations of the EIFS installed on approved gypsum-based or wood-based sheathing substrates, such as heads of windows and doors, and at the base of the wall.

3.4.3 A drainage mechanism shall be installed and may be one of the following: (1) Drainage mat, as described in Section 4.2.2.4 of this report; (2) Grooved (waved patterned) insulation boards; (3) Flat insulation board installed over Tyvek Stucco Wrap.

3.4.4 Foam plastic insulation boards shall be mechanically fastened to the approved substrate in accordance with Section 3.8 of this report.



3.4.5 The base coat, reinforcing mesh, and the finish coat shall be installed in accordance with Sections 3.9 and 3.10 of this report.

3.4.6 Special Inspection is not required for Aggre-Flex Drainage Class PB EIFS in accordance with Exception 1 to 2015 IBC Section 1705.16, or 2012 IBC Section 1705.15, or 2009 IBC Section 1704.14, as applicable. Special inspections are not required under the IRC.

3.5 Installation of Rollershield Drainage Class PB EIFS

3.5.1 Rollershield Water Barrier shall be applied by first treating the joints and fastener locations where sheathing is used, then coating the entire surface using brush, roller, trowel or airless spray equipment techniques. Sheathing joints shall be treated by applying a thin layer of Rollershield to the joints and embedding Rollershield Flashing Tape into the wet mixture with a trowel. Alternatively, Rollershield Mesh may be installed over all joints, corners and gaps in the substrate. Installation of the Rollershield Flashing Tape and the Rollershield Mesh shall be in accordance with the manufacturer's installation instructions.

3.5.2 The Rollershield Water Barrier material shall be applied in an even, continuous coat, maintaining a wet edge of approximately 15 mils thickness. Oriented Strand Board and other porous substrates require two coats of Rollershield Water Barrier material. For moisture protection, Rollershield shall be applied as a continuous barrier of 10 mils dry thickness with no breaks or skips.

3.5.3 A drainage track, as described in Section 4.2.2.7 of this report, shall be installed at all horizontal terminations of the EIFS installed on approved gypsum-based or wood-based sheathing substrates, such as heads of windows and doors, and at the base of the wall.

3.5.4 Foam plastic insulation boards shall be adhered to the approved substrate in accordance with Section 3.7 of this report. The adhesive shall be applied such that vertical drainage channels are formed between the insulation boards and the substrate, as described in Section 3.7.2.2 of this report. The ribbon and dab method of adhering the insulation boards to the substrate is not permitted.

3.5.5 The base coat, reinforcing mesh, and the finish coat shall be installed in accordance with Sections 3.9 and 3.10 of this report.

3.5.6 Special Inspections: "Special inspection shall be provided in accordance with 2015 IBC Section 1705.16.1, 2012 IBC Section 1705.15.1 or 2009 IBC Section 1704.14.1, as applicable. Installation instructions shall include a description of the duties of the special inspector. Vertical joints of insulation boards shall be staggered from edges of wall openings." [AC235].

3.6 Installation of QRW1 Drainage Class PI EIFS

3.6.1 A water-resistive barrier and weather-protection components complying with Section 4.2.2 of this report shall be installed in accordance with applicable sections of the IBC or IRC.

3.6.2 A drainage track, as described in Section 4.2.2.7 of this report, shall be installed at all horizontal terminations of the EIFS installed on approved gypsum-based or wood-based sheathing substrates, such as heads of windows and doors, and at the base of the wall.

3.6.3 A drainage mechanism shall be installed and may be one of the following: (1) Drainage mat, as described in Section 3.2.2.4 of this report; (2) Grooved (waved patterned) insulation boards; (3) Flat insulation board installed over Tyvek Stucco Wrap.

3.6.4 Foam plastic insulation boards shall be mechanically fastened to the approved substrate in accordance with Section 3.8 of this report.

3.6.5 The base coat, reinforcing mesh, and the finish coat shall be installed in accordance with Sections 3.9 and 3.10 of this report.

3.6.6 Special Inspection is not required for QRW1 Drainage Class PI EIFS in accordance with Exception 1 to 2015 IBC Section 1705.16, or 2012 IBC Section 1705.15, or 2009 IBC Section 1704.14, as applicable. Special inspections are not required under the IRC.

3.7 Adhered Insulation Board Installation

3.7.1 Master Wall® EPSA Application

3.7.1.1 The EPSA Adhesive is mixed using a heavy duty 1/2 inch (12.7 mm) drill at 400–500 rpm and a heavy duty mixing paddle. Water shall not be added. The EPSA Adhesive is applied directly to the back of the insulation board using a 3/8-inch x 1/2-inch (9.5 mm x 12.7 mm) U-notched trowel with the ribbons no further than 2 inches (50.8 mm) o.c.

3.7.1.2 The entire surface of the back of the insulation board shall be covered with full beads of adhesive formed by the notched trowel. The prepared insulation board is immediately placed on the substrate. All edges of the insulation board shall be abutted tightly and no EPSA Adhesive shall get into the board joints. The EPSA Adhesive shall not form a skin prior to placing the insulation board on the substrate. Firm pressure is applied to the entire surface of the insulation board to ensure solid contact between the insulation board and the substrate. The EPSA Adhesive shall not be applied directly onto the substrate.



3.7.2 Master Wall® F&M Adhesive/Basecoat Application

3.7.2.1 The F&M Adhesive is thoroughly stirred using a heavy duty 1/2 inch (12.7 mm) drill at 400–500 rpm and a heavy duty mixing paddle. One half of the stirred F&M Adhesive is poured into a clean plastic pail. Type I or I-II (Type 10) Portland cement is added to the pail of F&M Adhesive in a ratio of one-to-one by weight and is mixed to a homogenous consistency. The mixture shall stand for 3 to 5 minutes and then shall be stirred to a creamy consistency. Up to 30 ounces (0.9L) of clean, potable water may be added to a pail to adjust workability. Over mixing shall be avoided as faster setting or reduced working time can occur. Accelerators or retarders shall not be added to the F&M Adhesive.

3.7.2.2 When adhering foam plastic insulation board to gypsum substrates, the F&M Adhesive/Basecoat mixture shall be applied directly to the back of the insulation board using a 3/8-inch x 3/8-inch x 3/8-inch (9.5 x 9.5 x 9.5 mm) or a 3/8-inch x 1/2-inch x 1 1/2-inch (9.5 x 12.7 x 38.1 mm) stainless steel notched trowel. The entire back of the insulation board shall be covered with full beads that stand out 3/8 inch (9.5 mm) from the insulation board, and the beads shall form vertical drainage grooves when the insulation boards are adhered to the substrate.

3.7.2.3 When adhering foam plastic insulation board to non-gypsum substrates, the above described notched trowel method or the ribbon and dab method may be used. Using a stainless steel plastering trowel, a 2-inch (50.8 mm) wide by 3/8-inch (9.5 mm) high ribbon of the F&M Adhesive/Basecoat mixture is placed around the entire perimeter of the insulation board. Eight 3/8-inch-thick (9.5 mm) by 4-inch-diameter (102 mm) dabs of the mixture are placed approximately 8 inches (204 mm) on center inside the ribbon.

3.7.2.4 The prepared insulation board is immediately placed on the substrate. All edges of the insulation board shall abutted tightly and no mixture shall get into the board joints. The mixture shall not form a skin prior to placing the insulation board on the substrate.

3.8 Mechanically fastened Insulation Board Installation

3.8.1 Fasteners and plates described in Section 4.2.4 of this report are used to attach the foam plastic insulation boards to approved substrates.

3.8.2 When fastening through sheathing into wood stud framing, fasteners shall be installed a minimum of 12 inches (305 mm) on center vertically and 16 inches or 24 inches (406 or 610 mm) on center horizontally, depending on the stud spacing.

3.8.3 When fastening to wood-based sheathing, fasteners shall be installed according to Figure 2 for Aggre-flex Drainage EIFS and Figure 4 QRW1 Drainage EIFS.

3.8.4 When fastening to brick, masonry, or concrete walls, fasteners shall be installed a maximum of 24 inches (610 mm) on center vertically and 16 inches (406 mm) on center horizontally.

3.9 Base Coat and Mesh Application

All imperfections in the insulation board shall be rasped flush and any gaps in the insulation board shall be filled with slivers of insulation. The F&M Adhesive/Basecoat mixture is applied over the entire surface of the insulation board in a thickness greater than that of the reinforcing fabric being used (approximately 1/16 inch (1.6 mm) for standard mesh and 3/32 inch (2.4 mm) for Ultra Mesh). The reinforcing fabric is immediately embedded into the wet mixture and smoothed from the center to the edge to avoid wrinkles. The reinforcing fabric shall be continuous at all corners and lapped or abutted in accordance with Master Wall® specifications. The color of the mesh shall not be visible but a slight mesh pattern may be visible. The mixture shall cure a minimum of 12 hours and be flat, dry hard, and free of visible efflorescence before application of Superior Finish coat.

3.10 Finish Coat Application

3.10.1 Master Wall® Superior Finish is thoroughly stirred using a heavy duty 1/2 inch (12.7 mm) drill at 400–500 rpm and a heavy duty mixing paddle. Small amounts of clean, potable water may be added to obtain a workable consistency. To avoid color variations, the same amount of water is added to each pail. The amount of water added to each pail shall not exceed 24 ounces (0.7L).

3.10.2 A uniform thickness of approximately 1/16-inch (1.6 mm) of Master Wall® Superior Finish is applied using a stainless steel trowel. The finish coat shall be spread evenly and then scraped down to a thickness no greater than the largest aggregate in the material. The finish coat shall be immediately floated using a plastic float to the desired texture.

3.11 Wind Resistant EIFS Assemblies

Table 3 of this report presents allowable wind load resistance (psf) for mechanically attached and adhered EIFS described in this report.

3.12 Types I, II, III, and IV Construction-Aggre-Flex Class PB EIFS

3.12.1 The interior surface of the exterior wall shall consist of one layer of 5/8-inch-thick (15.9 mm), Type X gypsum wallboard (ASTM C1396), installed horizontally with 1 5/8-inch-long (41.3 mm) drywall screws spaced 8 inches (203 mm) on center.



3.12.2 Wall studs shall be C-shaped steel studs, minimum No. 18 gage [0.0486 inch (1.234 mm) base-metal thickness], 4 inches (102 mm) in depth, complying with the applicable provisions of the IBC or IRC. Stud spacing is maximum 16 inches (406 mm) on center. No insulation shall be installed in the stud cavity.

3.12.3 Wall openings shall be framed with minimum 0.0428-inch-thick (1.09 mm) aluminum or steel framing.

3.12.4 The exterior surface shall be one layer of minimum 1/2-inch-thick (12.7 mm), Type X gypsum sheathing (ASTM C1396) attached horizontally to the steel studs in accordance with the IBC. Maximum 4-inch-thick (102 mm) EPS foam plastic insulation boards are applied as described in this report. The base coat, reinforcing mesh, and finish coat are applied as noted in this report.

3.12.5 Fire-stopping material, consisting of mineral wool safing, shall be “installed in such a manner as to be securely retained in place (IBC Section 718.2.1)” at floor/wall interfaces. Minimum density of the fire-stopping material is 4 pcf (64.1 kg/m³).

3.13 Types I, II, III, and IV Construction-Rollershield Drainage™ Class PB EIFS

3.13.1 The interior surface of the exterior wall shall consist of one layer of 5/8-inch-thick (15.9 mm), Type X gypsum wallboard (ASTM C 1396, Federal Specification SS-L-30D Type III, Grade X), installed horizontally with 1 1/4-inch-long (31.7 mm) self-drilling drywall screws spaced 8 inches (203 mm) on center around the perimeter and 12 inches (305 mm) on center in the field.

3.13.2 Wall studs shall be C-shaped steel studs, minimum No. 18 gage [0.0486 inch (1.234 mm) base-metal thickness], 4 inches (102 mm) in depth, complying with the applicable provisions of the IBC or IRC. Stud spacing is maximum 16 inches (406 mm) on center. No insulation shall be installed in the stud cavity.

3.13.3 Wall openings shall be framed with minimum 0.0428-inch-thick (1.09 mm) aluminum or steel framing.

3.13.4 The exterior surface shall be one layer of minimum 5/8-inch-thick (15.9 mm), DensGlass® Exterior Sheathing (ASTM C1177) attached horizontally to the steel studs with No. 6 × 1 1/4-inch-long (31.7 mm) self-drilling screws spaced 8 inches (203 mm) on center at the perimeter and 12 inches (305 mm) on center in the field.

3.13.5 Rollershield mesh tape shall be applied to all sheathing joints, and Rollershield Weather Barrier shall be applied at a nominal 15 mils wet coat thickness onto the entire wall surface. See Section 3.5.1 and 3.5.2 of this report.

3.13.6 Maximum 4-inch-thick (102 mm) EPS foam plastic insulation boards are adhered to the exterior sheathing with the Master Wall® F&M (Foam & Mesh) Adhesive as described in Section 3.7.2 of this report. The base coat, reinforcing mesh, and finish coat are applied as noted in this report.

3.13.7 Fire-stopping material, consisting of mineral wool safing, shall be “installed in such a manner as to be securely retained in place (IBC Section 718.2.1)” at floor/wall interfaces. Minimum density of the fire-stopping material is 4 pcf (64.1 kg/m³).

4.0 PRODUCT DESCRIPTION

4.1 General

4.1.1 Master Wall® Aggre-Flex Class PB (Polymer Based) EIFS system: The system is field-installed on substrates of masonry, concrete, cement plaster, exterior grade gypsum sheathing, and wood-based sheathing, or approved exterior fiber-reinforced cement or calcium silicate boards. The components of the system are mechanical or adhesive attachment, flat expanded polystyrene (EPS) foam plastic insulation boards, fiberglass reinforcing mesh, and base and finish coats. The minimum total thickness of the EPS insulation boards is 1 inch (25.4 mm), and the maximum dimensions of the EPS insulation boards are 2 feet by 4 feet (610 mm by 1219 mm). The maximum total thickness of the EPS insulation boards is 4 inches (102 mm) for applications to buildings of Type I, II, III, or IV construction.

4.1.2 Master Wall® Aggre-Flex Drainage™ Class PB (Polymer Based) EIFS: The system is field-installed on substrates of masonry, concrete, exterior grade gypsum sheathing, wood-based sheathing, or approved cementitious sheathings. The components of the system are a drainage mat (optional), mechanical attachment; expanded polystyrene (EPS) foam plastic insulation boards; fiberglass reinforcing mesh; and base and finish coats. The minimum total thickness of the EPS insulation boards is 1 1/2 inches (38 mm), and 1/8-inch-deep (3.2) wave patterned grooves shall be across the width of the EPS board. When applied to gypsum sheathing, wood-based sheathing or approved exterior fiber-reinforced cement or calcium silicate boards, the EIFS shall include a code compliant water-resistive barrier applied over the substrate, and a code compliant flashing material.

4.1.3 Master Wall® Rollershield Drainage™ Class PB (Polymer Based) EIFS: The system is field installed on substrates of masonry, concrete, exterior grade gypsum sheathing having a water-resistant core gypsum board with fiberglass mat facers, wood-based sheathing, or approved exterior fiber-reinforced cement or calcium silicate boards. The components of the system are adhesive attachment, expanded polystyrene (EPS) foam plastic insulation boards, fiberglass reinforcing mesh, and base and finish coats. The



minimum total thickness of the EPS insulation boards is 1½ inches (38 mm). The maximum total thickness of the EPS insulation boards is 4 inches (102 mm) for applications to buildings of Type I, II, III, or IV construction. When applied to gypsum sheathing, wood-based sheathing or approved cementitious sheathing, the EIFS shall include Rollershield Water-resistive Coating (referenced in Section 4.2.2.3 of this report) applied over the substrate, and code-compliant flashing.

4.1.4 Master Wall® QRW1 Drainage™ Class PI (polyisocyanurate) EIFS: The system is field installed on substrates of masonry, concrete, exterior grade gypsum sheathing, wood-based sheathing, or approved cementitious sheathings. The components of the system are a drainage mat (optional), mechanical attachment, polyisocyanurate (PI) foam plastic insulation boards with coated glass-fiber facing, fiberglass reinforcing mesh, and base and finish coats. The minimum total thickness of the polyisocyanurate (PI) insulation boards is 5/8 inch (15.9 mm). When applied to gypsum sheathing, wood-based sheathing or approved exterior fiber-reinforced cement or calcium silicate boards, the EIFS shall include a code-compliant water-resistive barrier applied over the substrate, and a code-compliant flashing.

4.2 Materials

4.2.1 Substrates

4.2.1.1 Wood Structural I panel sheathing shall be Exterior or Exposure 1 grade plywood complying with US DOC PS-1 or Exposure 1 oriented strand board (OSB) complying with US DOC PS-2. Table 3 of this report provides thicknesses.

4.2.1.2 Exterior grade gypsum sheathing shall comply with ASTM C1396. Exterior sheathing having a water-resistant core with fiberglass mat facers shall comply with ASTM C1177. Type X exterior grade gypsum sheathing shall comply with ASTM C1396.

4.2.1.3 Substrates consisting of unglazed brick, unpainted brick, cement plaster, concrete or concrete masonry shall comply with the applicable sections of the IBC or the IRC.

4.2.2 Water-resistive Barriers and Weather-protection Components

4.2.2.1 Asphalt felt shall be No. 15 felt complying with ASTM D226 as Type 1, or an approved equivalent such as Tyvek® StuccoWrap® in accordance with Section 1404.2 of the IBC.

4.2.2.2 Building paper shall be Grade D kraft building paper with a 60-minute water resistance.

4.2.2.3 Master Wall® Rollershield Water-resistive coating is a proprietary, pre-mixed, liquid-applied, noncementitious,

polymer-based, water-resistive coating. Wall sheathing joint treatment and transition treatment shall include the 4-inch-wide (104 mm) Rollershield Flashing Tape.

4.2.2.4 Recognized drainage mat material is the Colbond® Enkadrain 5006 series and the Dupont™ Tyvek® StuccoWrap®.

4.2.2.5 Exterior sealants used with the Master Wall® EIFS systems shall be single-part polyurethane sealants conforming to Federal Specification TT-S-00230C, Type II, Class A; and ASTM C920, Type S, Grade NS, Class 25, Use NT, M, G and I. Sealant backer rods shall be of closed cell material.

4.2.2.6 Corrosion-resistant flashing shall be provided as part of the Master Wall® EIFS systems and shall be in accordance with IBC Section 1405.4 or IRC Section R703.4.

4.2.2.7 Drainage tracks shall be provided as part of the Master Wall® drainage EIFS systems described in this report. The drainage track shall be polyvinyl chloride (PVC) with weep holes. Weep holes are optional for the Aggre-Flex Drainage EIFS System. Alternatively, a corrosion-resistant weep screed complying with IBC Section 2512.1.2 is permitted when recommended by Master Wall® Inc.

4.2.3 Foam Plastic Insulation

4.2.3.1 Expanded polystyrene (EPS) foam plastic insulation board shall comply with ASTM C578, Type I and ASTM E2430 and shall demonstrate a flame spread index of 25 or less and a smoke-developed index of 450 or less when tested in accordance with ASTM E84 or UL723.

4.2.3.2 Polyisocyanurate (PI) foam plastic insulation boards shall comply with ASTM C1289, Type II, with a nominal density of 2 pcf (32 kg/m³), and shall demonstrate a flame spread index of 25 or less and a smoke-developed index of 450 or less when tested in accordance with ASTM E84 or UL723.

4.2.3.3 The EPS and PI insulation boards shall be produced by a manufacturer who participates in an approved third-party quality assurance program, and shall be labeled in accordance with IBC Section 2603.2 or IRC Section 316.2. When installed on buildings of Type I, II, III, or IV construction, the EPS foam plastic insulation shall be labeled in accordance with IBC Section 2603.5.6.



4.2.4 Plates and Fasteners

4.2.4.1 The plates in Table 1 of this report are recognized for use with specific Master Wall® EIFS:

Table 1 - Plates		
Plate Manufacturer	Plate Model for Master Wall® EIFS	
	Aggre-Flex EIFS and Aggre-Flex Drainage EIFS	QRW1 Drainage EIFS
ITW Buildex	Gridmate PB	Gridmate
Demand Products	PB Washer PBH Washer Gridmaster Washer	DP300 DP400
Wind-Lock	Wind Devil 2	ULP302 ULP402

4.2.4.2 Wind-Lock Corporation, No. 6 by minimum 1⁵/₈-inch-long (41.3 mm) screws, or an approved equivalent, shall be used to attach maximum 1-inch-thick (25.4 mm) foam plastic insulation boards to wood-based substrates. For thicker foam plastic, fastener length shall be sufficient to penetrate through and a minimum 1/₈-inch (3.2 mm) past the back surface of the wood-based sheathing.

4.2.4.3 Fasteners, when used to attach foam plastic insulation to brick, concrete, and masonry, shall be qualified for tension load resistance when installed into substrates. The fastener type and fastener schedule shall be specified by a design professional.

“To qualify the adequacy of fasteners in concrete or masonry substrates, a tension-load test program, consisting of fastener withdrawal from the applicable wall(s) of the building(s) at the location in question, shall be implemented. The testing shall be conducted by an independent testing laboratory.

- The average withdrawal strength, in pounds, shall be six times the design wind pressure for the location in question.
- A minimum of five tests per program is required, with results varying by no more than 15 percent from the average. If a minimum of 10 tests per program is conducted, variation from the average may be disregarded.
- For masonry substrates, a minimum of 40 percent of the tests shall be run in masonry joints.
- Prior to installation of EIFS fasteners, a certificate of compliance, concerning test results relating to load requirements in the evaluation report, shall be submitted to and approved by the building official.”[AC219]

4.2.5 Adhesive and/or Basecoat

4.2.5.1 Master Wall® F&M Adhesive/Basecoat is a liquid, acrylic-based admixtures combined at the jobsite with Type I or I-II Portland cement complying with ASTM C150. Master Wall® Bagged Base (MBB) is a dry version of the F&M

Adhesive. The F&M material is supplied in 5-gallon (18.9 L) pail and is mixed at the jobsite 1:1 with Portland cement to a creamy consistency. Application and storage temperatures are from 40°F (5°C) to 110°F (43°C).

4.2.5.2 Master Wall® EPSA (Expanded Polystyrene Adhesive) is a one-part noncementitious translucent gray adhesive that is ready to use directly from the pail as an adhesive over prepared approved substrates. The EPSA material is supplied in 5-gallon (18.9 L) pails. Application and storage temperatures are from 40°F (5°C) to 110°F (43°C).

4.2.6 Reinforcing Mesh

Master Wall® Aggre-flex Mesh is an open-weave, glass-fiber mesh, complying with ASTM D579, with an AR (Alkali Resistive) coating. Rolls of mesh shall not be stored on end or in direct sunlight. Seven grades of the mesh are available with differing mesh size, weight, and warp/fill tensile strength, as shown in Table 2 of this report.

Table 2 – Reinforcing Mesh		
Reinforcing Mesh Grade	Weight (oz/yd ²)	Roll Width by Length
Detail	4.5	9.5” × 150’
Standard	4.5	38” × 150’
Hi-Tech	6.0	48” × 250’
Medium	12.0	38” × 75’
Strong	15.4	38” × 75’
Ultra	21.0	38” × 75’
Corner	9.5	9.5” × 150’

For SI: 1 inch = 25.4 mm, 1 oz/yd² = 0.012 kg/m², 1 ft = 305 mm


4.2.7 Finish Coat

Master Wall® Superior Finishes are acrylic-based materials with Dirt Pickup Resistant (DPR) polymers, and are available in various colors and textures. The finish coat material is supplied in 5-gallon (18.9 L) pails. Application and storage temperatures are from 40°F (5°C) to 110°F (43°C).



5.0 IDENTIFICATION

Packaging and identification of the Master Wall® products recognized in this report shall include “the name (Master Wall® Inc.) and address of the manufacturer; identification of components, lot or batch number, quantity of material in the packaged mix, storage instructions, pot life, expiration date (when applicable), the name of the accredited inspection agency (when applicable)” in accordance with ASTM E2568, and the IAPMO UES evaluation report number and/or mark of conformity. Either Mark of Conformity may be used as shown below:

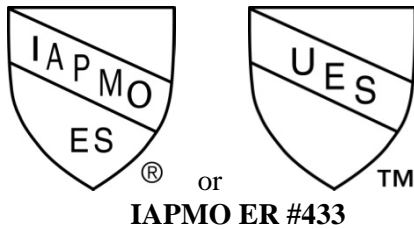

6.0 SUBSTANTIATING DATA

Test results from laboratories in compliance with ISO/IEC 17025 and data in accordance with:

- 6.1 ASTM E2568-Standard Specification for PB Exterior Insulation and Finish Systems.
- 6.2 ASTM E2273-Standard Test Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies.
- 6.3 NFPA 285-Standard Fire Test Method for the Evaluation of Fire Propagation Characteristics of Exterior Nonload-bearing Wall Assemblies Containing Combustible Components.
- 6.4 ICC-ES Acceptance Criteria for Exterior Insulation and Finish Systems (AC219®), October 2009 (editorially revised November 2014).
- 6.5 ICC-ES Acceptance Criteria for EIFS Clad Drainage Wall Assemblies (AC235®), January 2015.
- 6.6 ICC-ES Acceptance Criteria for Water-resistive Coatings Used as Water-resistive Barriers over Exterior Sheathing (AC212®), February 2015.
- 6.7 Manufacturer’s descriptive literature and installation instructions.

7.0 CONTACT INFORMATION

Master Wall® Inc.
POST OFFICE BOX 397
FORSTON, GEORGIA 31808
(800) 755-0825
www.masterwall.com

8.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research carried out by IAPMO Uniform Evaluation Service on Master Wall® products to assess their conformance to the codes and standards shown in Section 1.0 of this report and documents the products’ certification.

Brian Gerber, P.E., S.E.
Vice President, Technical Operations
Uniform Evaluation Service

Richard Beck, PE, CBO, MCP
Vice President, Uniform Evaluation Service

GP Russ Chaney
CEO, The IAPMO Group

EFor additional information about this evaluation report please visit www.uniform-es.org or email at info@uniform-es.org



TABLE 3—WIND LOAD RESISTANCE (psf)

EIFS	FRAMING		Exterior Sheathing ¹	FOAM PLASTIC INSULATION		ALLOWABLE WIND LOAD (psf)	
	Type	Spacing (in.)		Thickness (in.)	Attachment Method	Positive	Negative
Aggre-Flex Class PB EIFS & Rollershield Drainage Class PB EIFS	2×4 Wood (Minimum SG = 0.42)	16	1/2-inch-thick plywood, exterior grade	3/4	Adhered	65	60
			1/2-inch-thick gypsum	3/4	Adhered	55	45
	4-inch-deep C-studs, No. 18 gage [0.0486 inch (1.234 mm)]	16	1/2-inch-thick gypsum	3/4	Adhered	90	50
			5/8-inch-thick gypsum	3/4	Adhered	95	75
			5/8-inch-thick gypsum	3/4	Adhered	90	60
			1/2-inch-thick Dens Glass Gold	3/4	Adhered	65	45
			7/16-inch-thick OSB	3/4	Adhered	55	55
Aggre-Flex Class PB EIFS & QRW1 Drainage Class PI EIFS	2×4 Wood (Minimum SG = 0.42)	16	1/2-inch-thick plywood, exterior grade	1	Mecahnically Fastened	60	25
			1/2-inch-thick plywood, exterior grade	1 1/2	Mecahnically Fastened	60	35
			7/16-inch-thick OSB	5/8	Mecahnically Fastened	55	30

SI: 1 inch = 25.4 mm, 1 psf = 47.9 Pa.

¹The interior of the wall is minimum 1/2-inch-thick gypsum wall board.



MASTER WALL® EIFS

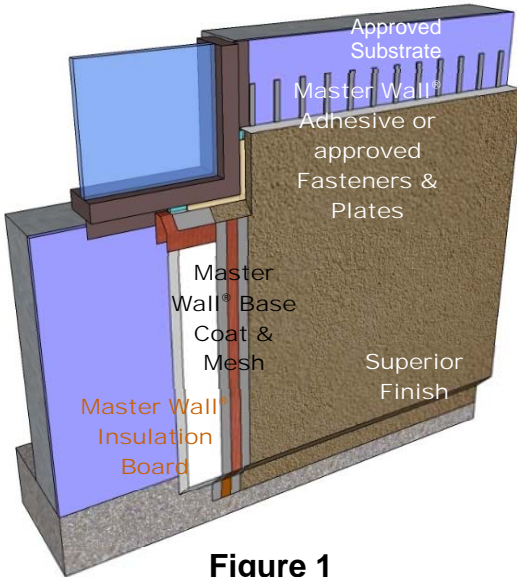


Figure 1
Aggre-flex EIFS

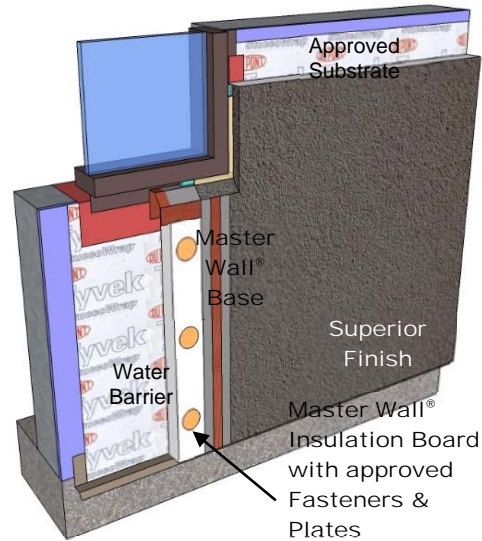


Figure 2
Aggre-flex Drainage EIFS

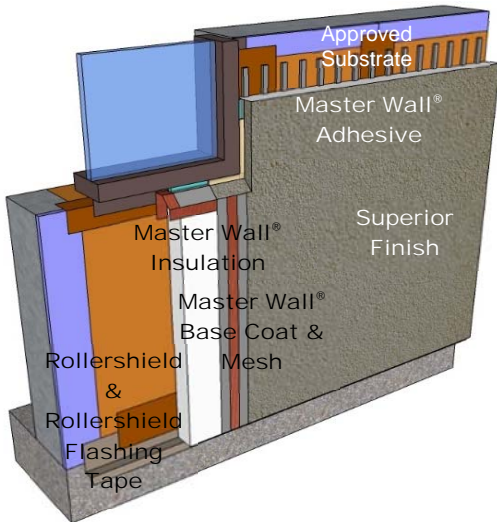


Figure 3
Rollershield Drainage EIFS

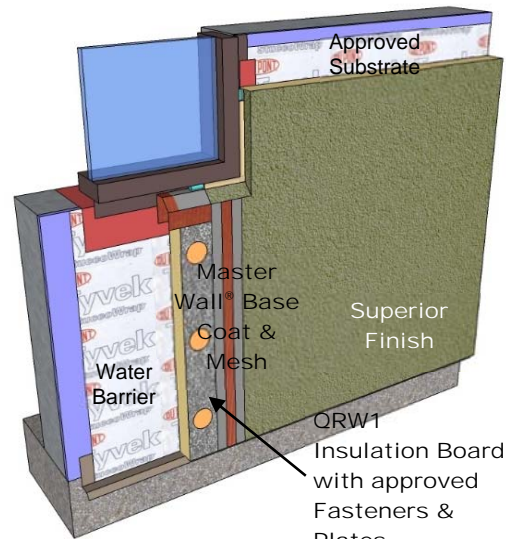


Figure 4
QRW1 Drainage EIFS



FLORIDA SUPPLEMENT

MASTER WALL® EIFS SYSTEMS:

AGGRE-FLEX CLASS PB EIFS; AGGRE-FLEX DRAINAGE™ CLASS PB EIFS; ROLLERSHIELD DRAINAGE™ CLASS PB EIFS; and QRW1 DRAINAGE™ CLASS PI EIFS

CSI SECTION: 07 24 00—Exterior Insulation and Finish Systems

CSI SECTION: 07 42 43—Composite Wall Panels

1.0 RECOGNITION

Master Wall® EIFS systems evaluated in IAPMO UES ER-433 are satisfactory alternatives to the cladding systems in the following codes and regulations:

- 2014 Florida Building Code, Building (FBC, Building)
- 2014 Florida Building Code, Residential (FBC, Residential)

2.0 LIMITATIONS

2.1 “Flashing shall be installed in such a manner as to prevent moisture from entering the wall or to redirect it to the exterior” in accordance with Section 1405.4 of the FBC, Building.

2.2 “In order to provide for inspection for termite infestation, clearance between exterior wall coverings and final earth grade on the exterior of a building shall not be less than 6 inches (152 mm)”, in accordance with Section 1403.8 of the FBC, Building or Section R703.9.4.1 of the FBC, Residential, as applicable.

2.3 Evaluation to the high-velocity hurricane zone (HVHZ) provisions noted in Section 1405.1 of the FBC, Building and Chapter 44 of the FBC, Residential is outside the scope of this report.

2.4 Wind loads for design purposes shall be determined in accordance with Section 1609 of the FBC, Building or Section R301.2.1 of the FBC, Residential, as applicable

2.4 Verification shall be provided that a quality assurance agency audits the manufacturers quality assurance program and audits the production quality of products, in accordance with Section (5)(d) of Florida Rule 61G20-3.008. The quality assurance agency shall be approved by the Commission (or the building official when the report holder does not possess an approval by the Commission).

For additional information about this evaluation report please visit www.uniform-es.org or email at info@uniform-es.org