



398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Product Evaluation Report

of

**Andersen Corporation
E-Series Hinged Patio Door - Outswing
(HVHZ) (Impact)**

for

Florida Product Approval

FL# FL25570

Report No. 8530

Current Florida Building Code

Method: 1 – D (Engineering Evaluation)
Category: Exterior Doors
Sub – Category: Swinging Exterior Door Assemblies


Product: E-Series Hinged Patio Door - Outswing
Materials: Wood & Aluminum Clad
Product Dimensions: See Installation Instructions, AWD230

Prepared for:

**Andersen Corporation
100 Fourth Avenue North
Bayport, Minnesota 55003**

Prepared by:

Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 05/11/2023

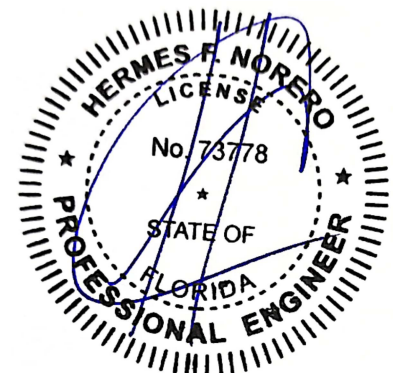

Contents:

Evaluation Report Pages 1 – 4

Hermes F. Norero, P.E.
Florida No. 73778

Manufacturer: Andersen Corporation

Product Category: Exterior Doors

Product Sub-Category: Swinging Exterior Door Assemblies

Compliance Method: State Product Approval Method (1)(d)

Product Name: E-Series Hinged Patio Door - Outswing (HVHZ) (Impact)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Andersen Corporation** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **AWD230**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the “High Velocity Hurricane Zone” (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does not require** an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **AWD230** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **AWD230** for size and design pressure limitations.

Quality Assurance:

The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **Window and Door Manufacturers Association-QA** (FBC Organization # QUA2515)

Performance Standards:

The product described herein has been evaluated per:

- TAS 201-94
- TAS 202-94
- TAS 203-94

Referenced Data:

1. Product Testing performed by **Architectural Testing, Inc. (an Intertek company) - Fridley, MN** (FBC Organization # TST1795)
Report #: D0685.01-201-18, Report Date: 01/06/14
Report #: D0686.01-201-18, Report Date: 01/06/14
Report #: D0688.01-201-18, Report Date: 01/06/14
Report #: D0688.02-201-18, Report Date: 01/07/14
Report #: D0689.01-201-18, Report Date: 01/07/14
Reports signed and sealed by Shawn G. Collins, FL PE No. 70655

Report #: E6407.01-201-18, Report Date: 06/09/15
Report #: E6409.01-201-18, Report Date: 06/09/15
Reports signed and sealed by Michael D. Stremmel, FL PE No. 65868

Report #: E6411.01-201-18, Report Date: 06/29/15
Reports signed and sealed by Joseph A. Reed, FL PE No. 58920
2. Material Certification
Miami-Dade County Notice of Acceptance
Kuraray America, Inc. (Previously DuPont)
Trosifol PVB Interlayer



FL#: **FL25570**
Date: 05/11/2023
Report No: 8530

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Installation:

Refer to Installation Instructions (**AWD230**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**AWD230**) for design pressures based on size, configuration, and glass types.