



398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Product Evaluation Report

of

**JELD-WEN, inc.
8700F Premium Atlantic Vinyl Stationary Casement Window
(HVHZ) (Impact)**

for

Florida Product Approval

Report No. 8762

Current Florida Building Code


Method: 1 – A (Certification)
Category: Windows
Sub – Category: Fixed

Product: 8700F Premium Atlantic Vinyl
Materials: PVC
Product Dimensions: 36” X 72”

Prepared for:
JELD-WEN, inc.
3737 Lakeport Blvd.
Klamath Falls, OR. 97601

Prepared by:
Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 08/23/2023

Contents:
Evaluation Report Pages 1 – 4

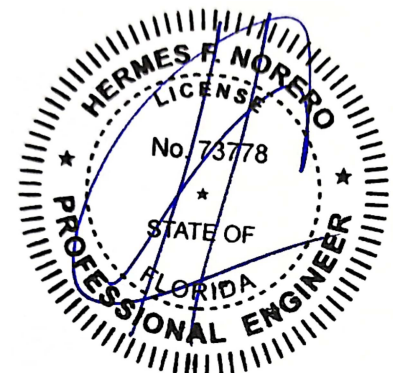

Hermes F. Norero, P.E.
Florida No. 73778

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Manufacturer: JELD-WEN, inc.

Product Category: Windows

Product Sub-Category: Fixed

Compliance Method: State Product Approval Method (1)(a)

Product Name: **8700F Premium Atlantic Vinyl Stationary Casement Window (HVHZ) (Impact)**

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **JELD-WEN, inc.** based on Method 1a of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **NCTL 210-3914-01**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the “High Velocity Hurricane Zone” (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Section 1609.1.2 of the current Florida Building Code and **does not** require an impact resistant covering.
5. Site conditions that deviate from the details of drawing **NCTL 210-3914-01** require further engineering analysis by a licensed engineer or registered architect.
6. See Installation Instructions **NCTL 210-3914-01** for size and design pressure limitations.

Certification Agency: The manufacturer has demonstrated compliance of products in accordance with the Florida Building Code for manufacturing under a Certification Agency through **National Accreditation & Management Institute** (FBC Organization #CER1773).

Performance Standards: The product described herein has been tested per:

- TAS 201-94
- TAS 202-94
- TAS 203-94

Referenced Data:

1. Product Testing performed by **National Certified Testing Laboratories** (FBC Organization # TST9341)
Report #: NCTL-210-3914-01, Report Date: 08/05/2013
2. Certification Agency
National Accreditation & Management Institute
(FBC Organization #CER1773)
3. Material Certification
Miami Dade RER – Product Control Section NOA
E.I. DuPont De Nemours & Co., Inc.: SentryGlas Plus Interlayer
4. Material Certification
Miami Dade RER – Product Control Section NOA
Quanex Building Products: PVC Extrusions

Installation:

Approved anchor types and substrates are as follows:

Through Frame Installation:

- A. For two by (2X) wood buck substrate (Min. S.G. = 0.42), use **#10 Wood Screw** type installation anchors of sufficient length to achieve a minimum embedment of 1.50” into the wood substrate.

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

- B. For concrete (Min. $f'c = 3000$ psi) or masonry (Conforms to ASTM C90) substrate where one by (1X), non-structural, wood bucking is employed, use **3/16" diameter ITW Tapcon** type concrete screw anchors of sufficient length to achieve minimum embedment of 1.25" into concrete or masonry.
- C. For concrete (Min. $f'c = 3000$ psi) or masonry (Conforms to ASTM C90) substrate where wood bucking is NOT employed, use **3/16" diameter ITW Tapcon** type concrete screw anchors of sufficient length to achieve minimum embedment of 1.25" into concrete or masonry.
- D. For steel stud substrate (Min 18 Ga., $Fy = 33$ ksi), use **#10 ITW TEK Screw** type steel stud anchors of sufficient length to achieve minimum 3 threads penetration beyond steel structure.

Nail Fin Installation:

- A. For two by (2X) wood buck substrate (Min. S.G. = 0.42), use **#10 Wood Screw** type installation anchors of sufficient length to achieve a minimum embedment of 1.50" into the wood substrate.

Refer to Installation Instructions (**NCTL 210-3914-01**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Design Pressure	
Positive	50 PSF
Negative	50 PSF